

## Bench-Type Drilling Machine

**210 Z**

Machine supplied with key chuck  
0,5-13mm

Vice 75mm

Protection device, coupled with  
chuck operation

Emergency stop on front side

Speed change via belt

Drilling table with 2 parallel slots of  
12mm




Technical Features	
Motor voltage	230V
Motor output	0,19Kw
Spindle taper	B16
Max. drill-Ø	Ø10mm
Throat	105mm
Spindle stroke	53mm
Spindle speed range	5 speeds - 600 to 2600Rpm
Slots (Quantity/Size)	T12
Weight	32Kg
Dimensions	600x420x240
EAN	7612375601275

## Bench-Type Drilling Machine

### 210Z

### Dimensions

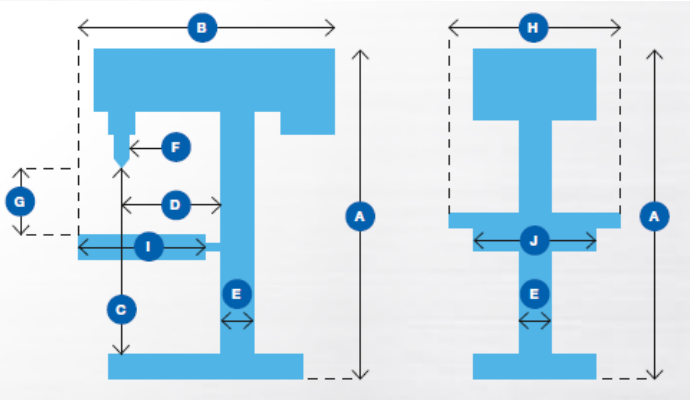

A	Overall height	585mm
B	Depth	400mm
C	Distance Spindle / Base	208mm
D	Throat	105mm
E	Column- $\varnothing$	48mm
F	Spindle nose	40mm
G	Distance Spindle / Table	250mm
H	Overall width	280mm
I	Table depth	165mm
J	Table width	165mm

### Accessories

#### Designation



Art. 9763

Assortment of clamping wedges T12



Art. 9249

Set of sliding blocks T12



Art. 2086

Ejector



Art. D25GS

Set of 25 HSS G drills, ground – 1 to 13mm per increment of 0,5mm

Art. D19GS

Set of 19 HSS G drills, ground – 1 to 10mm per increment of 0,5mm

Art. D19CO

Set of 19 HSS Co M35 drills, ground – 1 to 10mm per increment of 0,5mm