

Bench-Type Dilling Machine

211 Z

Machine supplied with quick clamping drill chuck 1-16mm
Vice 75mm

Protection device, coupled with chuck operation

Emergency stop on front side

Speed change via belt

Drilling table with 2 parallel slots of 12mm




Technical Features	
Motor voltage	230V
Motor output	0,19Kw
Spindle taper	B18
Max. dill-Ø	Ø16mm
Spindle stroke	60mm
Spindle speed range	5 speeds - 600 to 2600Rpm
Table load capacity max.	30Kg
Slots (Quantity/Size)	T12
Weight	32Kg
Dimensions	7612375601275

Bench-Type Drilling Machine

211Z

Dimensions

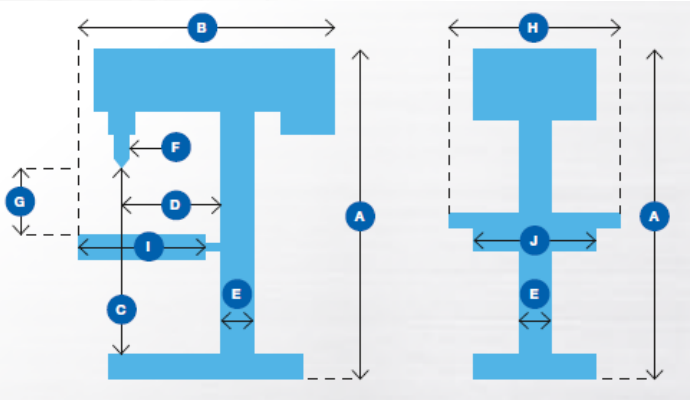

A	Overall height	745mm
B	Depth	510mm
C	Distance Spindle / Base	430mm
D	Throat	130mm
E	Column- \varnothing	60mm
F	Spindle nose	40mm
G	Distance Spindle / Table	300mm
H	Overall width	290mm
I	Table depth	205mm
J	Table width	210mm

Accessories

Designation



Art. 9763

Assortment of clamping wedges T12



Art. 9249

Set of sliding blocks T12



Art. 2086

Ejector



Art. D25GS

Set of 25 HSS G drills, ground – 1 to 13mm per increment of 0,5mm

Art. D19GS

Set of 19 HSS G drills, ground – 1 to 10mm per increment of 0,5mm

Art. D19CO

Set of 19 HSS Co M35 drills, ground – 1 to 10mm per increment of 0,5mm