

JET DDS-225-T Dual Drum Sander



FEATURES

- ▶ 5.5 kW motor for high removal rate
- ▶ Heavy-duty construction suitable for continuous commercial operation
- ▶ Steel drums with hard rubber coating for completely level, smooth surfaces
- ▶ Independently adjustable rear drum for controlled chip removal independent of the abrasive block diameter
- ▶ Two-speed feed gear adjustable to different types of wood
- ▶ Heavy cast iron feed bed, accurately guided in four spindles
- ▶ Drum hood with dual extractor outlet and guide plates for efficient dust removal
- ▶ Digital height display, quick and easy adjustment to the required measurement
- ▶ Sanding belts with widths of 75 mm or 100 mm can be used




TECHNICAL DATA

Motor (V / kW)	400 / 5.5
Drum speed (rpm)	1'400
Drum dimensions (ø-mm)	152 × 635
Sanding speed (m / s)	11.1
Feed speed (m / min)	2 + 3
Maximum sanding width (mm)	635
Minimum sanding length (mm)	230
Max. / min. sanding strength (mm)	133 / 0.8
Dust port (ø-mm)	2 × 100
Dimensions (mm)	1'230 × 1'140 × 1'150
Weight (kg)	332

CONTENT OF DELIVERY

- 80-grit & 100-grit, abrasive is pre-installed
- Height adjust handle
- Manual and Parts List

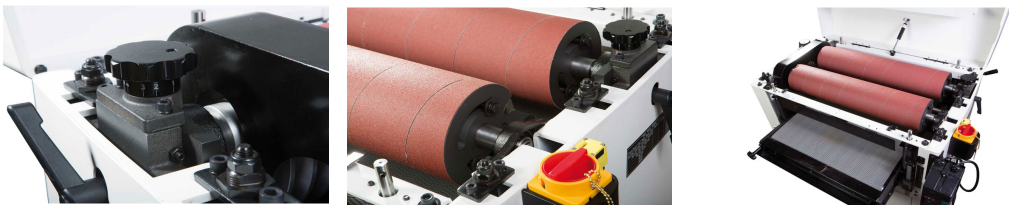

JET DDS-225-T Doppel-Zylinderschleifmaschine



FEATURES

- ▶ 5.5 kW-Motor für hohe Abtragleistung
- ▶ Robuste Bauweise, für gewerblichen Dauereinsatz geeignet
- ▶ Stahltrommeln mit Hartgummibeschichtung für absolut ebene, glatte Oberflächen
- ▶ Unabhängig einstellbare, hintere Trommel, für eine kontrollierte Spanabnahme
- ▶ Zweistufiges Vorschubgetriebe zur Anpassung an verschiedene Holzarten
- ▶ Schweres Vorschubbett aus Grauguss, in vier Spindeln präzise geführt
- ▶ Trommelhaube mit Doppel-Absauganschluss und Leitblechen für effiziente Staubabfuhr
- ▶ Digitale Höhenanzeige, schnell und sicher zum gewünschten Mass
- ▶ Schleifbänder mit 75 mm und 100 mm Breite verwendbar



TECHNISCHE DATEN

Motor (V / kW)	400 / 5.5
Trommeldrehzahl (U / min)	1'400
Trommelabmessungen (ø-mm)	152 × 635
Schleifgeschwindigkeit (m / s)	11.1
Vorschubgeschwindigkeit (m / min)	2 + 3
Maximale Schleifbreite (mm)	635
Kleinste Schleiflänge (mm)	230
Max. / min. Schleifstärke (mm)	133 / 0.8
Absauganschluss (ø-mm)	2 × 100
Abmessungen (mm)	1'230 × 1'140 × 1'150
Gewicht (kg)	332

LIEFERUMFANG

- 80er & 100er Schleifband auf Trommel montiert
- Höhenkurbel
- Bedienungsanleitung und Ersatzteilliste

