


JET JPT-410HH-T Planer / Thicknesser



FEATURES

- ▶ Integrated spiral planing shaft fitted with 72 × 4-fold carbide cutting inserts
- ▶ Optimal surface finish through drawn cut, tear-free even with an unfavourable grain structure
- ▶ The volume of chips is significantly reduced (approx. 50%)
- ▶ Extremely quiet
- ▶ The fine-grain carbide cutting inserts are robust and wear proof (5 × HSS), simply continue turning by 90° to the next cutting edge where required
- ▶ A machine investment that will pay off

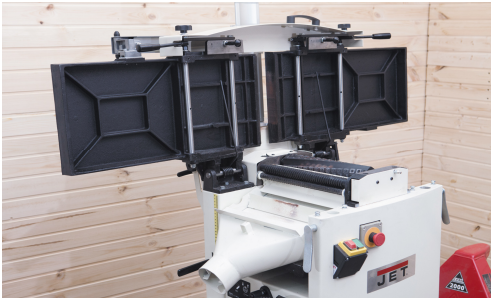

TECHNICAL DATA

Motor (V / kW)	400 / 3.7
Cutterhead rotation (rpm)	5'500
Feed speed (m / min)	7
Maximum planing width (mm)	407
Thicknessing height (mm)	4 - 225
Maximum depth of cut (mm)	3
Maximum thicknessing depth of cut (mm)	4,5
Number of knives	4
Planer blades (mm)	x
Depth of cut table size (mm)	1'660
Planing table length (mm)	1'100 × 150
Indexable inserts number	72
Minimum thicknessing length (mm)	150
Fence size (mm)	1'100 × 150
Fence tilt (deg.)	45° / 90°
Dust port (ø-mm)	100 / 120
Dimensions (mm)	1'660 × 870 × 1'000
Weight (kg)	315

CONTENT OF DELIVERY

- Planer thicknesser assembly
- Jointer fence assembly
- Cutter block guard
- 5 spare carbide inserts
- 10 spare Torx-screws
- 2 Torx screw drivers




JET JPT-410HH-T Abricht - Dickenhobelmaschine



FEATURES

- ▶ Integrierte Spiral-Hobelwelle mit 72 × 4-fach HM-Wendeplatten bestückt
- ▶ Optimale Oberflächengüte durch gezogenen Schnitt, ausrissfrei, auch bei ungünstigem Faserverlauf
- ▶ Das Spänevolumen ist erheblich reduziert (ca. 50%)
- ▶ Die Feinkorn Hartmetall Wendeplatten sind stabil und verschleissfest (5-mal HSS), bei Bedarf einfach um 90° zur nächsten Schneide weiterdrehen
- ▶ Eine Maschineninvestition die sich lohnt
- ▶ Extrem leise

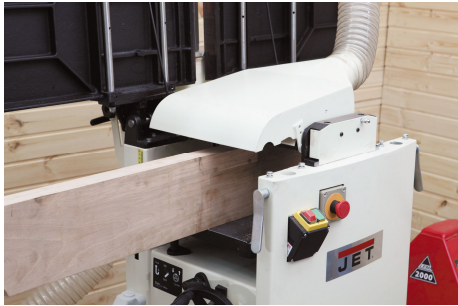

TECHNISCHE DATEN

Motor (V / kW)	400 / 3.7
Drehzahl Hobelwelle (U / min)	5'500
Vorschubgeschwindigkeit (m / min)	7
Maximale Hobelbreite (mm)	407
Dickendurchlass max. (mm)	4 - 225
Maximale Spanabnahme Abrichten (mm)	3
Maximale Spanabnahme Dickenhobel (mm)	4,5
Anzahl der Messer	4
Hobelmesser (mm)	x
Länge des Dickentischs (mit Verlängerung) (mm)	1'660
Länge der Abrichte (mm)	1'100 × 150
Wendeplattenanzahl	72
Kleinste Dickenhobellänge (mm)	150
Hobelanschlag (mm)	1'100 × 150
Schwenkbereich Anschlag	45° / 90°
Absauganschluss (ø-mm)	100 / 120
Abmessungen (mm)	1'660 × 870 × 1'000
Gewicht (kg)	315

LIEFERUMFANG

- Abricht-Dickenhobelmaschine
- Fügeanschlag
- Messerschutz
- 5 Stk. Ersatz Wendeplättchen
- 10 Stk. Ersatz Torx-Schrauben
- 2 Stk. Torx-Schraubendreher

