

JET JWL-1840EVS-M Wood Lathe



FEATURES

- ▶ Machine height ergonomically adjustable using the 100 mm cast iron risers and levelling feet supplied
- ▶ Emergency stop switch can be positioned as needed with the magnet on the machine bed
- ▶ The headstock moves across the whole machine bed and pivots by 360° for maximum versatility
- ▶ The main spindle is supported on three bearings for greater rigidity and load-bearing capacity
- ▶ Infinitely variable, adjustable speeds using a frequency converter, from 40 – 3'200 rpm with 2 belt speeds
- ▶ Tailstock with heavy-duty Acme thread, quill with anti-rotation key, with mm scale
- ▶ Double-wedge clamping for tool rest and extension, load-bearing, efficient, holds position securely
- ▶ Spindle lock for two-handed changing of the face plate and turning chuck
- ▶ The 36-hole spindle indexing device integrated in the pulley enables many types of decorative work




TECHNICAL DATA

Motor (V / kW)	230 / 2.4
Swing over bed (mm)	470
Swing over tool rest base (mm)	360
Centre distance (mm)	970 (1'025 with short trading grains)
Spindle speeds (rpm)	40 – 3'200, variable
Spindle nose	M33 × 3.5
Spindle index lock	36 × 10°
Headstock spindle taper	MK2
Tailstock spindle taper	MK2
Tailstock hole diameter (mm)	9
Tailstock ram travel (mm)	108
Steel support (ø / mm)	350 / 25.4
Centre above floor min / max (mm)	995 / 1'130
Dimensions (mm)	1'854 × 508 × 1'334
Weight (kg)	190

CONTENT OF DELIVERY

- 350mm Tool rest
- Live centre with cone
- 75mm Faceplate
- Live centre pin
- Knockout rod

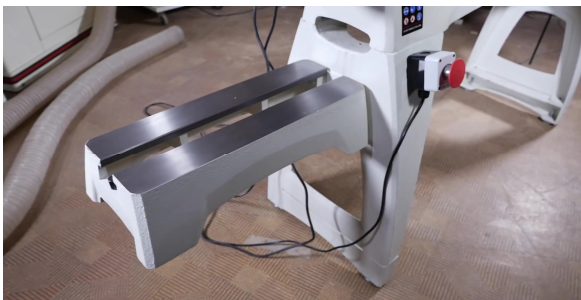

JET JWL-1840EVS-M Drechselbank



FEATURES

- Schweres, extra breites Graugussmaschinenbett für beste Laufruhe und Stabilität bei unwuchtigen Werkstücken
- Spindelstock über das gesamte Maschinenbett verschiebbar, um 360° drehbar mit Rastung bei 0° / 30° / 60° / 90° / 135° / 180° / 270°
- Stufenlose Drehzahlregelung, mit Drehgriff am Spindelstockende stufenlos von 280 bis 2'500 U / min einstellbar
- Integrierte Spindel-Teileinrichtung 36 × 10°
- Spindelarretierung vorne am Spindelstock für einfaches Wechseln der Aufspannmittel
- Doppelkeil-Klemmung für Handstahlauflege und Ausleger, besonders rutschfest und effizient
- Reitstock mit robustem Trapezgewinde, 108 mm Pinolenhub mit Skala, 9 mm-Durchgangsbohrung



TECHNISCHE DATEN

Motor (V / kW)	230 / 2.4
Drehdurchmesser über Bett (mm)	470
Drehdurchmesser über Handstahlauflege (mm)	360
Spitzenweite (mm)	970 (1'025 mit kurzem Mitlaufkörner)
Spindeldrehzahlen (U / min)	40 – 3'200, stufenlos
Spindelnase	M33 × 3.5
Spindel-Teileinrichtung	36 × 10°
Spindelkonus	MK2
Reitstockkonus	MK2
Reitstock Durchgangsbohrung (mm)	9
Reitstock Pinolenhub (mm)	108
Handstahlauflege (mm / ø)	350 / 25.4
Spindel Arbeitshöhe min / max (mm)	995 / 1'130
Abmessungen (mm)	1'854 × 508 × 1'334
Gewicht (kg)	190

LIEFERUMFANG

- 350 mm Handstahlauflege
- Mitlaufkörnerspitze MK-2
- 75 mm Aufspannscheibe
- Stirnmitnehmer MK-2
- Austreibstange

