

TOOL FRANCE

PREMIUMS

WWW.TOOLFRANCE.COM

Valid from 01/01/2022 au 31/07/2022

Price EX.

Excluding transport costs and container surcharge

For your information, an e-commerce site with
our spare parts will be launched in early February
2022:

www.pieces-detachees-toolfrance.com



JWP-12L



RDJ-410



Y-136C



JSG-96M

2022





BANDSAWS

JWBS-9X-M

- Robust cast aluminium work table, can be tilted up to 45°
- Ideal for precise routine work
- Powered by a quiet induction motor
- Includes precise positioning stop and mitre gauge
- With work light for illuminating the cut
- Saw blade guidance by means of sliding pins and ball bearing

230V



Price catalogue EX

£ 326

JWBS-10-M

- Its 100mm capacity and wide table will allow you to work on already large sections
- Its open base ensures stability and ease of use.
- Its rolling blade guides will ensure clean and precise cuts.
- Equipped with a safety micro switch, you will work in complete safety and according to the standards in force.

230V



Price catalogue EX

£ 428

JBS-12M

- Its 180mm capacity and its large 480X400 table will allow you to work on already large sections
- Its open base ensures stability and ease of use. Its rolling blade guides will ensure clean and precise cuts
- The JBS 12 is equipped with the latest electrical safety devices and will give you complete satisfaction

230V



Price catalogue EX

£ 986

	JWBS-9X-M	JWBS-10-M	JBS-12M
Power (V / kW)	230 / 0.35	230/0,35	230/0,80
Diameter of wheel (mm)	240	240	310
Maximum cutting height / Throat (mm)	80 / 230	100 / 245	180 / 305
Tilt of the table	0° – 45°	0 – 45°	0 – 45°
Table dimensions (mm)	300 x 300	335 x 345	480 x 400
Blade speed (m / min)	660	870	370 & 800
Saw blade length (mm)	1'575	1'712	2'240
Min / max saw blade width (mm)	3 / 10	3 to 13	6 to 15
Blade guide	Ball bearing	Ball bearing	Ball bearing
Table height from floor (mm)	–	1055	1'000
Mitered T-slot (mm)	–	–	–
Dimensions (mm)	500 x 500 x 740	760 x 500 x 1'500	915 x 655 x 1'860
Weight (kg)	20	40	68
Dust port (ø-mm)	53	100	100
Delivered with	Suction connection : ø 50 mm Mitre guide +/- 60 Positioning stop Saw blade 6.3 mm	Open base supplied Parallel Guide Tab Guide 1 Ribbon Mounting accessories Manual	Open base supplied Parallel Guide Tab Guide 1 Ribbon Mounting accessories Manual
EAN	7612375527995	7612375638746	7612375512106
DEEE	2.33	0,91	1,70
RANGE	J	J	J

BANDSAW

JWBS-15-M / JWBS-15-T

- The 546 x 406 mm cast-iron table provides the necessary stability for precision cutting
- Quick release and blade tensioning system
- The large cutting capacity of 356 mm allows you to cut solid wood panels

230V

Price catalogue EX

£2 077
JWBS-15-M

400V

Price catalogue EX

£2 226
JWBS-15-T



JWBS-18-M / JWBS-18-T

- Precision cast iron table 692 x 508 mm for stability and work support
- Quick release and blade tensioning system
- Two selectable blade speeds and cast iron blade wheels
- Independently adjustable ball bearing guide system

230V

Price catalogue EX

£2 489
JWBS-18-M

400V

Price catalogue EX

£2 657
JWBS-18-T



JWBS-20-T

- Equipped with a 5 HP engine, this machine will be able to work for long hours
- The solid cast iron table has a swan neck of over 500 mm - Blade guide mounted on bearings - Cutting height adjustment by independent steering wheel, all mounted on a rack and pinion for optimum precision
- Rip fence mounted on a round bar for better stability

400V

Price catalogue EX

£4 169



	JWBS-15-M / T	JWBS-18-M / T	JWBS-20-T
Power (V / kW)	230 / 1.1 - 400 / 1.5	230 / 1.5 - 400 / 2.2	400/3.7
Diameter of wheel (mm)	375	470	514
Maximum cutting height / Throat (mm)	356 / 359	406 / 457	406/508
Tilt of the table	5° left, 45° right	5° left, 45° right	5° left / 45° right
Table dimensions (mm)	546 x 406 x 51	692 x 508 x 41	690 x 508
Blade speed (m / min)	760	570 / 900	640 & 1'220
Saw blade length (mm)	3'380	3'810	4'013
Min / max saw blade width (mm)	3 / 25	3 / 32	3 to 38
Blade guide	Ball bearing	Ball bearing	Ball bearing
Table height from floor (mm)	890	940	940
Mitered T-slot (mm)	19.1 x 9.5	19.1 x 9.5	19,1 x 9
Dimensions (mm)	750 x 812 x 1'880	914 x 864 x 2'032	940 x 845 x 2'235
Weight (kg)	174	217	258
Dust port (ø-mm)	100	100	100
Delivered with	Suction connection: ø 100 mm Mitre guide +/- 45 Positioning stop Saw blade 13 mm	Suction connection: ø 100 mm Mitre guide +/- 45 Positioning stop Saw blade 20 mm	Suction Fitting Parallel Guide Trimmer Guide 1 Ribbon Mounting Accessories Manual
EAN	7612375520453 / 7612375527995	7612375520477 / 7612375526295	7612375538755
DEEE	4.35	5.43	6,90
RANGE	J	J	J

BANDSAW BLADE




Ref	Description	Machine	Price EX	Code	EAN
2570	Blade 1575 x 3 x 0,65 – 14 teeth	JWBS 9 x	£ 29.00	J	7612375680027
2571	Blade 1575 x 3 x 0,65 – 18 teeth	JWBS 9 x	£ 29.00	J	7612375680034
2572	Blade 1575 x 5 x 0,40 – 14 teeth	JWBS 9 x	£ 29.00	J	7612375680041
2573	Blade 1575 x 5 x 0,40 – 24 teeth	JWBS 9 x	£ 29.00	J	7612375680058
2567	Blade 1575 x 6 x 0,40 – 4 teeth	JWBS 9 x	£ 29.00	J	7612375679991
2568	Blade 1575 x 8 x 0,40 – 4 teeth	JWBS 9 x	£ 29.00	J	7612375680003
1000-002-011	Blade 1575 x 8 x 0,65 – 8 teeth	JWBS 9 x	£ 29.00	J	
2569	Blade 1575 x 10 x 0,40 – 4 teeth	JWBS 9 x	£ 29.00	J	7612375680010
10000111	Blade 1712 x 6 x 0,36 – 10 teeth	JWBS-10	£ 35.00	J	7612375692709
10000112	Blade 1712 x 10 x 0,36 – 6 teeth	JWBS-10	£ 35.00	J	7612375692716
10000113	Blade 1712 x 13 x 0,36 – 4 teeth	JWBS-10	£ 35.00	J	7612375692723
10008019	Blade 4013 x 6 x 0,50 – 6 teeth	JWBS-20	£ 77.00	J	7612375692730
10008020	Blade 4013 x 13 x 0,50 – 4 teeth	JWBS-20	£ 77.00	J	7612375692747
10008021	Blade 4013 x 16 x 0,50 – 4 teeth	JWBS-20	£ 77.00	J	7612375692754
10008022	Blade 4013 x 20 x 0,50 – 3 teeth	JWBS-20	£ 77.00	J	7612375692761
10008023	Blade 4013 x 25 x 0,50 – 3 teeth	JWBS-20	£ 77.00	J	7612375692778
2503	Blade 2240 x 3,0 x 0,65 – 14 teeth	JBS 12	£ 31.00	J	7612375500141
10000101	Blade 2240 x 6 x 0,50 – 6 teeth	JBS 12	£ 31.00	J	7612375680096
2505	Blade 2240 x 10 x 0,65 – 6 teeth	JBS 12	£ 31.00	J	7612375500165
9225010	Blade 2240 x 10 x 0,50 – 6 teeth	JBS 12	£ 31.00	J	7612375680072
9225015	Blade 2240 x 16 x 0,50 – 4 teeth	JBS 12	£ 31.00	J	7612375680089
10000103	Blade 2560 x 3 x 0,6mm – 14 teeth	JWBS 14Q	£ 35.00	J	7612375700930
10000104	Blade 2560 x 6 x 0,5mm – 6 teeth	JWBS 14Q	£ 35.00	J	7612375700947
10000105	Blade 2560 x 10 x 0,4mm – 6 teeth	JWBS 14Q	£ 35.00	J	7612375700954
10000110	Blade 2560 x 16 x 0,5mm – 4 teeth	JWBS 14Q	£ 45.00	J	7612375700961
10000115	Blade 2560 x 20 x 0,6mm – 3 teeth	JWBS 14Q	£ 56.00	J	7612375700978
10008000	Blade 3380 x 6,0 x 0,6mm – 6 teeth	JWBS 15	£ 56.00	J	7612375688931
10008001	Blade 3380 x 6,0 x 0,50 – 4 teeth	JWBS 15	£ 56.00	J	7612375688948
10008002	Blade 3380 x 6,0 x 0,60 – 10 teeth	JWBS 15	£ 56.00	J	7612375688955
10008003	Blade 3380 x 10,0 x 0,50 – 6 teeth	JWBS 15	£ 59.00	J	7612375688962
10008004	Blade 3380 x 10,0 x 0,50 – 4 teeth	JWBS 15	£ 59.00	J	7612375688979
10008005	Blade Blade 3380 x 20,0 x 0,70 – 8 teeth	JWBS 15	£ 66.00	J	7612375688986
10008006	Blade 3380 x 20,0 x 0,60 – 6 teeth	JWBS 15	£ 66.00	J	7612375688993
10008007	Blade 3380 x 20,0 x 0,60 – 4 teeth	JWBS 15	£ 66.00	J	7612375689006
10008008	Blade 3380 x 25,0 x 0,70 – 8 teeth	JWBS 15	£ 67.00	J	7612375689013
10008009	Blade 3380 x 25,0 x 0,60 – 6 teeth	JWBS 15	£ 67.00	J	7612375689020
10008010	Blade 3810 x 6,0 x 0,60 – 6 teeth	JWBS 18	£ 63.00	J	7612375689037
10008011	Blade 3810 x 6,0 x 0,50 – 4 teeth	JWBS 18	£ 63.00	J	7612375689044
10008012	Blade 3810 x 10,0 x 0,60 – 6 teeth	JWBS 18	£ 67.00	J	7612375689051
10008013	Blade 3810 x 10,0 x 0,50 – 4 teeth	JWBS 18	£ 67.00	J	7612375689068
10008014	Blade 3810 x 20,0 x 0,70 – 8 teeth	JWBS 18	£ 74.00	J	7612375689075
10008015	Blade 3810 x 20,0 x 0,60 – 6 teeth	JWBS 18	£ 74.00	J	7612375689082
10008016	Blade 3810 x 20,0 x 0,60 – 4 teeth	JWBS 18	£ 74.00	J	7612375689099
10008017	Blade 3810 x 25,0 x 0,70 – 8 teeth	JWBS 18	£ 76.00	J	7612375689105
10008018	Blade 3810 x 25,0 x 0,60 – 6 teeth	JWBS 18	£ 76.00	J	7612375689112

SCROLL SAW

354

- Cast iron table can be tilted from -10° to +45° to the right
- Two speed motor
- Heavy cast iron construction to reduce vibration and ensure stability
- Blower system continuously cleans the cutting line

230V

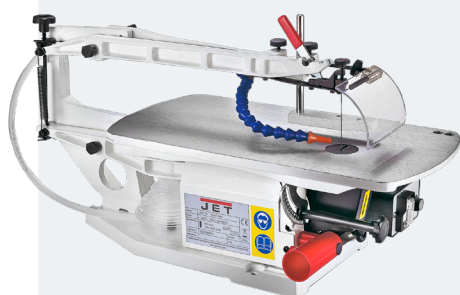

Price catalogue EX

£ 575

354V

- Double arm pivots for perfectly parallel blade action
- Variable blade speeds over a range of 400 – 1,400 strokes / min
- Uses pinned or pinless blades
- Maximum cutting depth of 60 mm, greater than most other machines
- Heavy cast iron construction to reduce vibration and ensure stability
- Supplied with eye protection, clamp and chip blower for safe operation

230V



Price catalogue EX

£ 689

JSS-16A

- For complex cutting radii on small parts made of wood, chipboard
- plywood and plastic
- Variable speed range of 550 – 1'600 strokes / min
- Quick-change blade system
- Use of saw blades with or without spindle
- Saw blade can be rotated by 90° for an extended working range
- Blower system continuously cleans the cutting line
- With eye protection

230V



Price catalogue EX

£ 168

	354	354V	JSS-16A
Motor (V / kW)	230 / 0.12	230 / 0.12	230 / 0.09
Speed range (strokes / min)	700 – 1'400	400 – 1'400, variable	550 – 1'600, variable
Saw blade (mm)	130	130	127 / 130
Throat (mm)	460	460	406
Oscillation stroke length (mm)	20	20	15
Table dimensions (mm)	450 x 230	450 x 230	415 x 254
Max. cutting height (90° / 45°, mm)	60 / 45	60 / 45	50
Arm tilt	–	–	–
Table tilt	45° left – 10° right	45° left – 10° right	0° – 45° left
Dust port (mm)	36	36	35
Dimensions (mm)	290 x 640 x 380	640 x 290 x 380	620 x 340 x 330
Weight (kg)	29	29	13.5
Delivered with	Suction Adapter 3 sets of 5 blades 2 sets of Blade Holders (0.5 and 0.7mm) Service Wrenches User Manual	Suction Adapter 3 sets of 5 blades 2 sets of Blade Holders (0.5 and 0.7mm) Service Wrenches User Manual	Set of 5 spindle saw blades: 10,15,18,20,25 Z 2 saw blade holders Suction connection: ø 35 mm
EAN	7612375600933	7612375600940	7612375512656
DEEE	0.68	0.68	0.28
RANGE	J	J	J

SLIDING MITRE SAW / SCROLL SAW

JSMS-10L-M

- Powerful 1.5 kW motor with braking system
- Table extensions up to 1030 mm
- Integrated spindle lock for easy blade change
- Cast aluminium design for easy transport
- Clamping device for workpiece retention
- for precision cutting
- Integrated bevel stops at 0° and 45

230V

Price catalogue EX

£ 324



JWSS-22B

- The upper blade holder clamps and tensions the blade at once (patent pending)
- The removable lower blade holder can be clipped on quickly and securely
- Large 600 x 322 mm cast iron table provides a stable working surface
- surface to reduce vibration
- Grooved table for quick and easy blade changes
- Variable speed range of 400 – 1'550 strokes / min
- Arm tilts 45° to the right and 40° to the left, keeping the work table flat for a more precise cutting

230V

Price catalogue EX

£1 237

TILTING ARM



	JSMS-10L-M
Motor (V / kW)	230 / 1.5
Blade speed rotation (tr / min)	4'500
Diameter of blade (ø-mm)	254
Blade bore (ø-mm)	30
Head angle	0° – 45°, left & right
Cutting width (90°/45°)	90 / 42
Cutting height (90°/45°)	305 / 215
Angle of rotation	0° – 45°, left & right
Head indexing	0° / 15° / 22.5° / 30° / 45°
Dimensions (mm)	1'047 x 911 x 597
Weight (kg)	18
Delivered with	Pellet saw blade carbide 40 teeth Clamping device Chip bag Linear laser
EAN	7612375700718
DEEE	0.45
RANGE	J

	JWSS-22B
Motor (V / kW)	230 / 0.05
Speed range (strokes / min)	400 – 1'550, variable
Saw blade (mm)	130 (with or without lugs)
Oscillation stroke length (mm)	19
Throat (mm)	565
Table dimension (mm)	600 x 322
Max. cutting height (à 90° en mm)	48
Arm tilt	45° right – 45° left
Dimensions (mm)	840 x 400 x 445
Weight (kg)	31
Delivered with	5 coarse-toothed saw blades Saw blade storage Suction connection: ø 38 mm Blade attachments 4 rubber feet 2 lower blade holders Workpiece retainers
EAN	7612375517293
DEEE	0.780
RANGE	J

CONSTRUCTION SAW

JTS-315SP-M | JTS-315SP-T

- Folding legs and bayonet mounted on the rear table extension for quick start-up of the machine
- Powerful motor with brake, suitable for continuous operation
- Machine table made of corrosion and wear resistant galvanised steel
- Table insert made of anodised aluminium
- Precisely guided sliding table with ball bearing for straight and bevelled cuts
- Convenient blade tilt up to 47° via hand wheel, adjustable stop at 0°.
- Transport device facilitates simple change of positions



230V
315SP-M

400V
315SP-T

Price catalogue EX

£ 612

JTS-600X-M | JTS-600X-T

- The cast iron table guarantees precise cuts
- Sliding table made of extruded aluminium,
- precision machined and anodised
- Robust positioning stop with
- with micro adjustments on the round bar guide
- Large manual cast iron wheels
- for easy operation
- 460 x 600 mm support table with positioning stop
- positioning stop for retraction of
- 2'200 mm



230V
600X-M

400V
600X-T

Price catalogue EX

£1 922

JTS-600XL-M | JTS-600XL-T

- Cast iron table to ensure the stability
- stability of the unit
- Anodised aluminium mobile carriage mounted on bearings for high cutting accuracy
- Robust parallel guide with
- micro-adjustments on round bar
- Cast iron handwheels for easy operation
- 460 x 600 mm support table on telescopic arm
- Telescopic stop up to
- 2200 mm



230V
600XL-M

400V
600XL-T

Price catalogue EX

£2 313

	JTS-315SP-M	JTS-315SP-T	JTS-600X-M	JTS-600X-T	JTS-600XL-M	JTS-600XL-T
Power (V / kW)	230 / 1,6	400 / 2,0	230 / 1,5	400 / 1,5	230 / 1,5	400 / 1,5
Speed of blade (tr / min)	2'990		4'000		4'000	
Blade size / bore (ø-mm)	315 / 30		250 / 30		250 / 30	
Blade tilt	0 – 47°		0° – 45°		0° – 45°	
Max. cutting height 0° / 45° (mm)	90 / 60		80 / 54		80 / 54	
Max. cutting depth (mm)	310		610		610	
Table dimensions (mm)	800 x 550		800 x 350		800 x 350	
Extension size (mm)	800 x 550 (Rear)		415 x 350		415 x 350	
Table extension, right (mm)	800 x 550 (option)		800 x 270 (standard)		800 x 270 (standard)	
Precision sliding table (mm)	250 x 230		1'000 x 255		1'000 x 255	
Max. cutting length (mm)	600		610		1'600	
Dimensions (mm)	2'050 x 970 x 1'000		1'400 x 2'200 x 1'100		1'400 x 2'200 x 1'100	
Weight (kg)	74		150		150	
Delivered with	Transport wheels and carrying handle Push rod Dust port ø 100 mm Positioning stop		Sliding table format 1'000 x 255 mm Carbide saw blade ø 254 x 30 x 3 mm – 36 WZ Positioning stop Table 460 x 600 mm with removable stop 2'200 mm Suction connection ø 100 mm		Sliding table format 1'000 x 255 mm Carbide saw blade ø 254 x 30 x 3 mm – 36 WZ Positioning stop Table 460 x 600 mm with removable stop 2'200 mm Suction connection ø 100 mm	
EAN	7612375702224	7612375702231	7612375508893	7612375705409	7612375512076	7612375512076
DEEE	1,73		3,63		3,90	
RANGE	J		J		J	

RADIAL MITRE SAW

JTSS-1600-M | JTSS-1600-T

- Professional sliding table saw for working with wood and wood-based laminates
- This machine is equipped with a sliding table (support) with a travel distance of 1'600 mm
- Supplied with various accessories, which is a clear advantage as no further purchase of parts is necessary
- The machine has a scoring blade driven by the main motor and a sawing module with tilt and
- with tilt and height adjustment
- Bleached grey cast iron table



230V

400V

Price catalogue EX

£4 496

	JTSS-1600-M	JTSS-1600-T
Power (V / kW)	230 / 2.4	400 / 3.0
Speed of blade (tr / min)		4'700
Blade size / bore (ø-mm)		315 / 30
Blade tilt		0 – 45°
Max. cutting height 0° / 45° (mm)		100 / 80
Max. distance between blade and positioning stop		1'220
Table dimensions (mm)		800 x 385
Extension size (mm)		500 x 310 (Rear)
Table extension, right (mm)		800 x 400
Precision sliding table (mm)		1'600 x 270
Max. cutting length (mm)		1'350
Cutting blade speed (rpm)		8'700
Cutting blade size / bore (ø-mm)		90 / 20
Dimensions (mm)		1'750 x 3'000 x 1'200
Weight (kg)		265
Delivered with	1,600 x 240 mm sliding table with edging guide Carbide saw blade ø 254 x 30 x 3 mm – 36 WZ Positioning stop 680 x 580 mm support table mounted on arm with telescopic scale up to 2200mm Suction connection ø 100 mm	
EAN	7612375 527124	7612375 508451
DEEE		6.63
RANGE		J

BENCH TOP PLANER

JWP-12

230V

Price catalogue EX

£ 444

- With sharpening disc for a clean cut in no time
- The 4-column guide ensures stability and precision
- Powerful 1,800 W motor with overload protection
- 18,000 cuts per minute ensure optimum planing results
- Folding table extensions with support rollers make work easier

JWP-12L

NEW

230V

Price catalogue EX

£582 €

STATIONARY PLANING MACHINE

JPT 8B

- Robust mobile or stationary planer for use on building sites and in workshops
- Powerful 1.5 kW induction motor
- 9'000 rpm ensure optimal planing results
- HSS planing blades can be resharpened
- High quality thick table and planer for less friction and for less friction and wear
- The 4-column guide ensures stability and precision



230V

Price catalogue EX

£ 620

PLANING MACHINE ON STAND

JPT 10B

- Robust mobile or stationary planer for use on building sites and in workshops
- Powerful 1.5 kW induction motor
- 9'000 rpm ensure optimal planing results
- HSS planer blades can be sharpened
- High quality thick table and planer for less friction and for less friction and wear
- The 4-column guide ensures stability and precision



230V

Price catalogue EX

£ 763

	JWP 12	JWP 12L	JPT-8B-M	JPT-10B-M
Power (V/kW)	230 / 1,80	230 / 1.7	230 / 1,50	230 / 1,50
Surface planing				
Max width (mm)	-	-	200	250
Table length (mm)	-	-	740	954
Distance table/surface	-	-	350	985
Workpiece stop (mm)	-	-	540 x 105	630 x 120
Tilt zone	-	-	0°/45°	0°/45°
Maximum thickness (mm)	-	-	3	3
Planing				
Max. width (mm)	318	-	200	254
Min/Max Height	from 6 to 153	-	from 5 to 120	from 5 to 120
Table length (mm)	-	-	270	305
Minimum length of pieces (mm)	200	-	160	160
Speed Advance (m/min)	7	-	6	6
Max. planing thickness (mm)	2,5	-	2	2
Number of irons	2	-	2	2
Shaft Rotation Speed (rpm)	9000	-	9000	9000
Width of Irons (mm)	319	-	200	260
Dimensions	700x600x500	-	780 x 440 x 550	980x470x1120
Weight (kg)	30	-	28	34
Delivered with	Table extensions Planing Suction nozzle Iron adjustment module Manual		Stop Blade guard Table extensions Planing Suction nozzle Knife adjustment module Manual	
EAN	7612375702156	-	7612375525014	7612375705492
DEEE	0,83	-	0,7	0,85
RANGE	J	-	J	J

WORKSHOP PLANER THICKNESSER

Available in 3 widths with classic 3-iron head

- JPT 260 – Width 260 mm in 230 V or 400 V
- JPT 310 – Width 310 mm in 230 V or 400 V
- JPT 410 – Width 410 mm in 400 V only

**JPT 260-M
JPT 260-T**

Price catalogue EX

£2 009

**JPT 310-M
JPT 310-T**

Price catalogue EX

£2 450

JPT 410-T

Price catalogue EX

£3 098



Available with Helical Head with 56 reversible 4-sided inserts

- Designed in a compact way, the JET planers will allow you to switch from one operation to another in a few seconds
- The planing operation can be adjusted by means of an eccentric, while the planing operation can be precisely adjusted by means of a handwheel located below. A digital height indicator (Art.10000291) can be added as an option, for even more precision.
- Finally, the cast iron tables are designed to allow optimal gliding of the workpieces

**JPT 310-HH-M
JPT 310-HH-T**

Price catalogue EX

£3 160

JPT 410HH-T

Price catalogue EX

£4 643

	JPT-260-M / JPT-260-T	JPT-310-M / JPT-310-T	JPT-310HH-M / JPT- 10HH-T	JPT 410-T	JPT 410HH-T
Power (V/kW)	230 / 1.7 – 400 / 1.7	230 / 2.2 – 400 / 2.2	230 / 2.2 – 400 / 2.2	400 / 3	230 / 1.8
Surface planing					
Max width (mm)	257	307	307	407	407
Table length (mm)	1'120	1'400	1'400	1'660	1'660
Distance from table to floor	850	850	850	850	850
Workpiece stop (mm)	900 x 150	1'100 x 150	1'100 x 150	1'100 x 150	1'100 x 150
Tilt zone	0° / 45°	0° / 45°	0° / 45°	0° / 45°	0° / 45°
Maximum thickness (mm)	3	3	3	3	3
Planing					
Max. width (mm)	256	307	307	407	407
Min/Max Height	from 3 to 225	from 3 to 225	from 3 to 225	from 3 to 225	from 3 to 225
Table length (mm)	540	540	540	600	600
Minimum length of pieces	150	150	150	150	150
Speed Advance (m/min)	5,2	7	7	7	7
Max. planing thickness (mm)	4.5	4.5	4.5	4.5	4.5
Number of irons	3	3	4 rows	3	4 rows
Shaft Rotation Speed (rpm)	5'500	5'500	5500	5'500	5'500
Width of Irons (mm)	260 x 25 x 3	310 x 25 x 3	56 carbide inserts	410 x 25 x 3	56 carbide inserts
Dimensions	1'120 x 700 x 1'000	1'400 x 750 x 1'000	1'400 x 750 x 1'000	1'660 x 870 x 1'000	1'660 x 870 x 1'000
Weight (kg)	170	230	230	315	315
Delivered with	Aspiration Nozzle User's manual Service keys Safety accessories Safety Accessories Blade	Aspiration Nozzle User manual Service keys Safety Accessories Blade Calibrator	Aspiration Nozzle User's Manual Service keys Safety accessories Blade calibrator	Nozzle Aspiration User Manual Service keys Safety accessories Safety Accessories Blade	Aspiration Nozzle User manual Service keys Safety Accessories Blade Calibrator
EAN	7612375701647 (230V) 612375701654 (400V)	7612375701661 (230V) 7612375701678 (400V)	7612375537024 (230V) 7612375701692 (400V)	7612375701708	7612375701722
DEEE	4.25	5.75	6.75	7.88	9.25
RANGE	J	J	J	J	J

PLANER THICKNESSERS

Available in 2 widths with classic 3-iron head


- RDJ 310 – Width 310 mm in 230V or 400V

RDJ 310-M
RDJ 310-T

Price catalogue EX

£3 235**230V****400V****MORTISING OPTION AVAILABLE**

Made in Europe



Classic head

Available in 2 widths with classic 3-iron head

- RDJ 410 – Width 410mm in 230V (NEW) or 400V

RDJ 410-M**RDJ 410-T****NEW TO THE RANGE**

Price catalogue EX

£4 171

Price catalogue EX

£4 507**400V****230V****MORTISING OPTION AVAILABLE**

Made in Europe

	RDJ310M/RDJ310T	RDJ410M/RDJ410T
Power (V/kW)	230V/2,2 (S6) - 400/3,0 (S6)	230/2,2 (S6) / 400/4,4
Surface planing		
Max width (mm)	310	410
Max width (mm)	1400	1800
Distance table/surface	5400	5500
Workpiece stop (mm)	1300x150	1500x150
Tilt zone	90°/45°	90°/45°
Maximum thickness (mm)	4	4
Planing		
Max. width (mm)	310	410
Max. height (mm)	230	230
Table length (mm)	430	600
Speed Advance (m/min)	6	6
Maximum planing thickness (mm)	4	4
Number of irons	3	3
Shaft Rotation Speed (rpm)	5400	5500
Dimensions of irons (mm)	310x25x3	410x25x3
Overall dimensions (mm)	1570x760x990	1950x712x1010
Weight (kg)	250	350
DEEE	7.0	8.0
RANGE	J	J

PLANER THICKNESSERS

RDJ-310HH-M

RDJ-310HH-T

Helical head 4-sided reversible inserts

- RDJ 310HH – Width 310 mm in 230V or 400V

230V

400V

MORTISING OPTION AVAILABLE



Helical head



Made in Europe

Price catalogue EX

£4 169

RDJ 310HH-M/RDJ310HH-T

Power (V/kW) 230/2,2-400/3,0

Surface planing

Max width (mm) 310
 Table length (mm) 1400
 Distance table/surface 5400
 Workpiece stop (mm) 1300x150
 Tilt zone 90°/45°
 Maximum thickness (mm) 4

Planing

Max. width (mm) 310
 Max. height (mm) 230
 Table length (mm) 430
 Speed Advance (m/min) 6
 Maximum planing thickness (mm) 4
 Number of irons 3 rows
 Shaft Rotation Speed (rpm) 5400
 Dimensions of irons (mm) –
 Overall dimensions (mm) 1570x760x990
 Weight (kg) 250
 DEEE 7.0
 RANGE J

PLANER THICKNESSERS

Helical head 4-sided reversible inserts

- RDJ 410HH – Width 410 mm in 230V (NEW) or 400V

RDJ 410HH-M

RDJ 410HH-T

MORTISING OPTION AVAILABLE

NEW TO THE RANGE

Price catalogue EX

Price catalogue EX

£6 077

£5 885

400V

230V



Mortising Kit



Helical head



Made in Europe

RDJ410HH-M/RDJ410HH-T

Power (V/kW) 230/2,2 (S6) / 400/4,4

Surface planing

Max width (mm) 410
 Table length (mm) 1800
 Distance table/surface 5500
 Workpiece stop (mm) 1500x150
 Tilt zone 90°/45°
 Maximum thickness (mm) 4

Planing

Max. width (mm) 410
 Max. height (mm) 230
 Table length (mm) 600
 Speed advance (m/min) 6
 Maximum planing thickness (mm) 4
 Number of irons 3 rangées
 Shaft Rotation Speed (rpm) 5500
 Dimensions of irons (mm) 410x25x3
 Overall dimensions (mm) 1950x712x1010
 Weight (kg) 350
 DEEE 8,00
 RANGE J

COMBINED ACTIONS

COMBINED 5 OPERATIONS

HX-260-M

- Interesting machine for the experienced amateur and professional
- Excellent quality/price ratio
- Adapted to the demanding user, it will offer you a working comfort and a machining precision rarely reached
- Equipped with 3 3CV motors
- The squaring guide is held by a shoe
- THE MORTISE IS OPTIONAL (NOT ORIGINAL)
- SAW BLADE NOT SUPPLIED

230V



Made in Europe

Price catalogue EX

£6 790

HX-310PRO-T

- Interesting machine for the experienced amateur and professional
- Excellent quality/price ratio
- Adapted to the demanding user, it will offer you a working comfort and a machining precision rarely reached
- Equipped with 3 x 3CV motors
- The squaring guide is held by a shoe
- THE MORTISE IS OPTIONAL (NOT ORIGINAL)
- SAW BLADE NOT SUPPLIED

400V



Made in Europe

Price catalogue EX

£8 311

	HX-260-M	HX-310PRO-T
Power (V / kW)	230 / 3	400 / 4
SURFACE PLANER		
Table dimensions (mm)	260 x 1320	310 x 1320
Dimensions of irons (mm)	260 x 25 x 3	310 x 25 x 3
Maximum cutting thickness (Planer)	3	4
Maximum cutting thickness (Clearance)	3	4
Maximum planing height (mm)	230	230
Tool shaft dimensions (mm)	70	70
Automatic feed speed (m/min)	6	6
Rotational speed (RPM)	5500	5500
Number of irons	3	3
SAW		
Diameter of blade maximum (mm)	250	250
Speed (t/min)	4500	4500
Cutting height at 45° (mm)	55	55
Cutting height at 90° (mm)	85	85
Dimension of table (mm)	1077 x 273	1077 x 273
Carriage travel (mm)	1250	1250
SPINNING TOP		
Single phase speed (RPM)	6000	3000 / 6000
Diameter (mm)	30	30
Router shaft capacity (mm)	120	120
Maximum height adjustment (mm)	140	140
Maximum tool diameter in the guide (mm)	180	180
MORTISING		
Speed (T/min)	4500	5500
Dimensions of table (mm)	200 x 425	200 x 425
Stroke: Lat / Dep / Green (mm)	165 x 140 x 85	165 x 140 x 85
Chuck (mm)	0 - 16	0 - 16
DEEE	12.13	13.48
RANGE	J	J

WOOD LATHE

JWL-1015-M

- Extra large and heavy frame (GG-20) for very quiet operation and better stability when working on unbalanced workpieces
- Infinitely variable speed control with 3 belt levels from 200 to 3'600 rpm (JWL-1015VS-M)
- Quick change lever for easy and precise positioning of the tool holder and tailstock

230V



Price catalogue EX

£ 598

JWL-1015VS-M

230V



Price catalogue EX

£ 661

JWL-1221-M

- Extra large and heavy frame for very quiet operation
- very quiet operation and better stability when working on poorly balanced workpieces
- Smooth transition from forward to reverse, digital speed display
- Spindle lock at the front of the headstock for easy changeover between a rotary table and a swivel chuck

230V



Price catalogue EX

£ 950

JWL-1221VS-M

230V



Price catalogue EX

£1181

	JWL-1015-M	JWL-1015VS-M	JWL-1221-M	JWL-1221VS-M
Power (V / kW)	230 / 0,37	230 / 0,37	230 / 0,56	230 / 0,73
Diameter above the bench (mm)	254		318	
Base of swivel tool holder (mm)	186		240	
Distance between spikes (mm)	385		500	
Spindle speeds (rpm)	400 / 700 / 1'000 / 1'500 / 2'200 / 3'300	200 – 3'600, variable	360 / 850 / 1'230 / 1'510 / 2'180 / 3'280	200 – 3'600, variable
Spindle nose	M33 x 3,5		M33 x 3,5	
Indexing of the spindle	24 x 15°		24 x 15°	
Headstock spindle taper	CM2		CM2	
Tailstock spindle taper	CM2		CM2	
Spindle Bore (mm)	9,5		9,5	
Spindle stroke of the tailstock (mm)	50		57	
Tool support (ø / mm)	150 / 15,9		150 + 250 / 15,9	
Dimensions (mm)	885 x 300 x 370		853 x 280 x 450	
Weight (kg)	33	35	55	
Delivered with	Tool holder 150 mm 75mm chuck Counter Spindle CM2 Claw Drive Ejector		Tool holder 150 mm + 250 mm Plateau 75 mm Counter rotating point CM2 Drive Claw Ejector	
EAN	7612375 508895	7612375 508901	7612375 531244	7612375 705133
DEEE	0.83		1.38	
RANGE	J		J	

WOOD LATHE ON STAND

JWL-1440VS-M

- Extra large and heavy frame (GG-20) for very quiet operation and
- very quiet operation and better stability when working on poorly balanced workpieces
- Fixed headstock adjustable over the entire base, 360° swivel with detent for 0° / 30° / 60° / 90° / 135° / 180° / 270
- Infinitely variable speed adjustment by means of the turning handle on the headstock end from 280 to 2'500 rpm
- Spindle lock at the front of the headstock for easy exchange of a rotary table and a swivel chuck



Price catalogue EX

£1875

230V

JWL-1640EVS-M

- Continuously adjustable speeds via frequency converter
- frequency converter, from 40 – 3'200 rpm with 2 belt levels
- Heavy duty, effective double clamping for tool holder securely holds the position
- For maximum versatility, the headstock is adjustable over the entire frame and swivels 360°



230V

Price catalogue EX

£3001

	JWL-1440VS-M	JWL-1640EVS-M
Power (V / kW)	230 / 0.75	230 / 1.10
Diameter above the bench (mm)	370	418
Base of swivel tool holder (mm)	280	325
Distance between spikes (mm)	1'016	940 (990 with short counter tip)
Spindle speeds (rpm)	350 – 2'500, Variable	40 – 3'200, variable
Spindle nose	M33 x 3.5	M33 x 3.5
Indexing of the spindle	36 x 10°	36 x 10°
Headstock spindle taper	CM2	CM2
Tailstock spindle taper	CM2	CM2
Spindle Bore (mm)	9	9
Spindle stroke of the tailstock (mm)	108	108
Tool support (ø / mm)	300 / 25.4	350 / 25.4
Dimensions (mm)	1'880 x 460 x 1'250	1'854 x 508 x 1'334
Weight (kg)	165	170
Delivered with	Tool Carrier 300 mm Tool Carrier Console Plateau 75 mm Counter Spindle CM2 Drive Claw CM2 Ejector With Base	Tool Carrier 300 mm Tool Carrier Console Plateau 75 mm Counter Spindle CM2 Drive Claw CM2 Ejector With Base
EAN	7612375 510188	7612375 517316
DEEE	4.0	4.25
RANGE	J	J

WOOD LATHE ON STAND

JWL-2442-M

230V

- With magnetic emergency stop button, freely positionable can be positioned on the frame
- The main spindle is fixed on 3 points, for more rigidity and strength
- Continuously adjustable speeds via frequency converter
- frequency converter, from 0 – 3'500 rpm with 2 belt levels
- Tailstock with integrated tool storage compartment, solid quill with 115 mm stroke and mm scale
- Spindle lock, so that both hands are free to change the clamping device



Price catalogue EX

£7129

JWL-1840EVS-M

230V

- Continuously adjustable speeds via frequency converter
- from 40 – 3'200 rpm with 2 belt levels
- The main spindle is fixed on 3 points, for more rigidity and strength
- Counterbore with robust trapezoidal thread, spindle with rotation-protected key, with scale in mm
- Indexing with 36 positions integrated in the pulley allows a multitude of decorative work



Price catalogue EX

£3310

	JWL-2442-M	JWL-1840EVS-M
Power (V / kW)	230 / 2.2	230 / 2.4
Swing over bench (mm)	610	470
Base of swivel tool holder (mm)	-	360
Distance between spikes (mm)	1'067	970 (1'025 with short counter tip)
Spindle speeds (rpm)	0 – 910 / 0 – 2'000 / 0 – 3'500, variable	40 – 1,10, variable
Spindle nose	M33 x 3.5	M33 x 3.5
Indexing of the spindle	14 x 25.7° / 36 x 10° / 48 x 7.5°	36 x 10°
Headstock spindle taper	CM2	CM2
Tailstock spindle taper	CM2	CM2
Spindle Bore (mm)	9.5	9
Spindle stroke of the tailstock (mm)	115	108
Tool holder (mm/ Ø)	350	350 / 25.4
Centre above ground (mm)	1'120	1000 / 1'100
Dimensions (mm)	2'260 x 710 x 1'651	1'854 x 508 x 1'334
Weight (kg)	395	170
Delivered with	Air chuck Air gun CM2 short turning point Long torunante point CM2 2 cast iron bases Mounting plate Ø 75 mm CM2 claw Ejector User's manual Exploded view Tool holder 350 mm	Tool Carrier 350 mm Tool Carrier Console Plateau 75 mm Short and Long CM2 Counter Spikes Drive Claw CM2 Ejector Emergency Stop Button Cast iron base with levelling pads
EAN	7612375700824	7612375520538
DEEE	9.88	4.75
RANGE	J	J

WATER GRINDING

JSSG-8-M

- The speed of rotation of the grinding wheel is controlled by an electronic variator, which ensures that the speed remains constant during the sharpening process.
- Equipped with a 250 grit grinding wheel, you will be able to sharpen your tools in the finest and most regular way possible.
- Sold with its protractor, you will have no trouble finding the right angle of sharpening.
- Its waterproof case will prevent all foreign bodies (filings and water) from entering the machine.
- Its leather disc will allow you to finish your sharpening for an optimal work.



Price catalogue EX

£ 419

230V

JSSG-10-M

- The big brother of the JSSG-8-M, its 250mm diameter and large width wheel will allow you to sharpen not only your turning tools but also any sharp object (chisels, plane irons, knives or turning gouges).
- You will have the possibility to adjust the torque for heavy sharpening that requires more pressure than normal on the wheel.
- A whole range of accessories are available for this purpose.
- Its large water tank will allow your wheel to be constantly immersed, thus offering a better sharpening.
- Its waterproof case will prevent all foreign bodies (filings and water) from entering the machine.
- Its leather disc will allow you to finish your sharpening for an optimal work.
- Finally, for this model there is an optional base designed to receive all the accessories for sharpening your tools.



230V

Price catalogue EX

£ 478

	JSSG-8-M	JSSG-10-M
Power (V / kW)	230 / 0.16	230 / 0.16
Motor speed (tr / min)	100 – 200	90 – 150
Leather grinding disc (ø-mm)	200 x 40 x 12	230 x 30
Grinding wheel (mm)	200 x 40 x 12	250 x 50 x 12
Grain of the grinding wheel	250G	250G
Dimensions (mm)	250 x 220 x 330	400 x 300 x 330
Weight (kg)	7.8	14.5
Delivered with	Water grinding machine Grinding wheel ø 200 mm, grain 250 Leather grinding disc ø 180 mm Water tank Standard support arm Straight cutting device Scraper for grinding wheel Polishing paste tube Grinding angle guide	Water grinding machine Grinding wheel ø 250 mm, grain 250 Leather grinding disc ø 230 mm Water tank Standard support arm Straight cutting device Scraper for grinding wheel Polishing paste tube Grinding angle guide
EAN	7612375523737	7612375700725
DEEE	0.2	0.4
RANGE	J	J

COMBINATION BELT SANDER

JSG-233A-M

- 2-in-1 sanding unit, offering multiple adjustment possibilities for all lengths.
- Its sanding arm, adjustable between 0° and 90°, will allow you to make various angles for a perfect joint.
- Equipped with its velcro support, changing the sanding discs is child's play and takes only a few seconds.
- When placed on these rubber pads, vibrations and noise are reduced.

230V

Price catalogue EX

£ 478



JSG-96-M

- The cast iron machine body (40kg) provides stability and support for this to this professional sanding unit. Its 0.50kW motor will allow you to sand a large number of wood species, even the hardest.
- The sanding arm, which can be tilted up to 90°, provides an important surface as well as as well as the 2 tables that equip this model.
- The sanding belt can be adjusted by means of a knob to ensure perfect belt alignment. perfect alignment of the belt.
- The 2 tables can also be tilted, allowing sanding of edges or bevelling.
- Placed on its base (optional), this combination will delight the most demanding users.

230V

Price catalogue EX

£ 748



JSG-31A-M

- The largest model in the range, the JSG 31A handset will find its place in a smaller space.
- Compact and robust, its cast iron design will allow all types of sanding work thanks to a powerful motor (1.10 kW).
- Placed on its base, this machine equipped with its 2 adjustable cast iron tables and with an important support, will offer you many possibilities.
- The large sanding belt (150mm) coupled with a sanding arm that can be tilted up to 90° up to 90° will allow finishing and adjustments in total safety.
- Finally, the various adjustments will be facilitated by the knobs provided for this

230V

Price catalogue EX

£1 481



	JSG-233A-M	JSG-96-M	JSG-31A-M
Power (V / kW)	230 / 0.4	230 / 0,5	230 / 1.1
Sanding disc speed (engine speed)	1'850	1'400	2'400
Sanding belt speed (m / s)	8	10	12
Sanding disc diameter (ø-mm)	200	230	300
Sanding belt dimensions (mm)	100 x 914	150 x 1'220	150 x 1'220
Tilt of the sanding disc table	0° - 45°	45° downwards	-45° / 15°
Tilt of the sanding belt table	0° - 45°	45° downwards	-45° / 0°
Sanding disc table size (mm)	115 x 225	250 x 300	230 x 440
Sanding belt table size (mm)	25 x 125	140 x 280	190 x 330
Dust port (ø-mm)	38	100	110
Weight (kg)	26	40	124
Dimensions	500 x 450 x 350	780 x 680 x 450	830 x 700 x 1'400
Delivered with	Adhesive Velcro backing Ø200mm 1 sanding disc Ø200mm 1 sanding belt User's manual Service keys	1 sanding disc Ø230mm 1 sanding belt Mitre guide User's manual Service keys	1 sanding disc Ø 300 mm 1 sanding belt Mitre guide User's manual Service keys
Option	-	Stand J_708597	-
EAN	7612375608632	7612375700701	7612375526837
DEEE	0.65	1.0	3.10
RANGE	J	J	J

BELT AND CYLINDER SANDER

JBOS-5-M

- The 25mm oscillation reduces frictional heat to protect the wood and extend the life of the sleeve
- Main spindle supports travel on precision ball bearings and oscillates through a heavy duty endless shaft and gear mechanism to ensure continuous performance
- Oscillating gears operate in a closed lubrication box for long life

230V



Price catalogue EX

£ 802

JOSS-S

- The 25mm oscillation reduces frictional heat to protect the wood and extend the life of the sleeve
- Main spindle supports travel on precision ball bearings and oscillates through a heavy duty endless shaft and gear mechanism to ensure continuous performance
- Oscillating gears operate in a closed lubrication box for long life

230V



Price catalogue EX

£1 744

OES-80CS-M / OES-80CS-T

- 100 oscillations per minute ensure a smooth surface and no burn marks
- 150 x 2'260 mm sanding belt can be positioned horizontally, vertically and in any position
- Sanding pad with graphite coating to significantly increase the glide of the sanding belt and its durability

230V



Price catalogue EX

£1 413

400V

	JBOS-5-M	JOSS-S
Power (V / kW)	230 / 0.3	230 / 0.7
Spindle speed (rpm)	1'400	1'400
Spindle diameter (ø-mm)	6,35 / 12,7 / 15,88 / 38,1 / 50,8	6,35 / 9,53 / 12,7 / 15,88 / 19,0525,4 / 38,1 / 50,8 / 76,2 / 101,6
Max. sanding height (mm)	100	80 – 160
Table dimensions (mm)	370 x 370	623 x 623
Table tilt	0° – 45° downwards	45° front / 15° rear
Spindle height (mm)	150	150 / 230
Oscillations / minute	30	60
Oscillation stroke (mm)	25	38
Dust port (ø-mm)	100	100
Dimensions (mm)	370 x 370 x 460	623 x 623 x 995
Weight (kg)	35	98
Delivered with	Pins supplied with sleeves with the diameters shown above 2 table inserts (round and oval) Storage rack for spindles 100mm Dust Adapter Adjustment keys	
EAN	7612375702903	7612375512618
DEEE	0.88	2.45
RANGE	J	J

	OES-80CS-M	OES-80CS-T
Power (V / kW)	230 / 1.1	400 / 1.5
Sanding belt speed (m / s)	16	
Dimensions of the sanding belt (mm)	150 x 2'260	
Belt tilt	90° – 180°	
Size of the sanding belt table (mm)	750 x 250	
Table extension (mm)	250 x 300	
Oscillation stroke (mm)	13	
Oscillations / minute	108	
Dust port (ø-mm)	100	
Dimensions (mm)	1'150 x 460 x 960	
Weight (kg)	120	120
Delivered with	Machine stand Extension table Sanding belt guard Horizontal stop Resting block Mitre gauge 1 sanding belt Roller housing Working tools	
EAN	7612375704310	7612375704327
DEEE	2.93	
RANGE	J	

DOUBLE CYLINDER SANDER

JWDS-1632-M

- Open-sided construction allows sanding widths of up to 812 mm in two passes
- SandSmart control continuously monitors the cylinder motor load and automatically regulates the conveyor motor speed to maintain the highest feed rate without overloading
- Precision-machined and balanced extruded aluminum cylinder is designed to dissipate heat and protect the work surface from heat damage
- Workpiece parallelism is quickly and accurately adjustable by
 - by adjusting the feed table,
 - with Memory function



Price catalogue EX

£1 595

230V

JWDS-1836

- Open-sided construction allows sanding widths of up to 812 mm in two passes
- SandSmart control continuously monitors the cylinder motor load and automatically regulates the conveyor motor speed to maintain the highest feed rate without overloading
- Precision-machined and balanced extruded aluminum cylinder is designed to dissipate heat and protect the work surface from heat damage
- Workpiece parallelism is quickly and accurately adjustable by
 - by adjusting the feed table,
 - with Memory function



Price catalogue EX

£1 983

230V

JWDS-2244OSC-M

- Oscillating drum sander in the new JET design with extended functionality
- Infinitely variable oscillation of the sanding drum minimises visible grinding marks
- Drum cover with integrated air guidance
- Workpiece parallelism can be adjusted easily, quickly and without tools by simply moving the feed table, with memory function



Price catalogue EX

£3 378

230V

	JWDS-1632-M	JWDS-1836	JWDS-2244OSC-M
Power (V / kW)	230 / 1.1	230 / 1.3	230 / 1.3
Speed of cylinder rotation (tr / min)	1'400	1'400	1'400
Min / max thickness (mm)	0.8 / 75	0.8 / 75	102 / 0.8
Min. sanding length (mm)	60	60	60
Max. sanding width (mm)	406 (812, two passages)	457 (914, two passages)	560 (1120 two passages)
Cylinder dimension (mm)	127 x 410	127 x 460	584 x ø 127
Conveyor Speed (m/min)	0 à 3, variable	0 à 3, variable	0 à 3, variable
Oscillation frequency (min)	-	-	0 - 120, variable
Dust port (ø-mm)	100	100	100
Dimensions (mm)	508 x 1'269 x 1'007	508 x 1'269 x 1'007	1'200 x 610 x 1'320
Weight (kg)	75	87	98
Delivered with	Machine + its open base Pre-installed sanding belt User's manual	Machine + its open base Pre-installed sanding belt User's manual	User's manual Firm machine stand with 4 wheels Sanding belt G80 Height crank Pipe holder
Options	Input/Output Table Set - 723521	Input/Output Table Set - 723521	Input/Output Table Set - 723551
EAN	7612375 519976	7612375 520545	7612375 547658
DEEE	1.63	1.88	4.15
RANGE	J	J	J

DOUBLE CYLINDER SANDER

DDS-225-T / DDS 237-T

- 3.7 kW motor for high removal power
- Robust construction for continuous professional use
- Steel bearings with hard rubber coating for completely flat and smooth surfaces
- Independently adjustable rear bearings for controlled chip removal regardless of wheel diameter
- Two-stage feed motor for adaptation to various types of wood
- Heavy cast iron feed bed, precisely guided with four spindles
- Drum cover with double dust port and guide plates for efficient dust removal
- Digital depth display, quick and safe adjustment to the desired size
- Works with 75 mm and 100 mm wide sanding belts

400V

DDS-225-T

Price catalogue EX

£4 837

400V

DDS 237-T

Price catalogue EX

£7 025



	DDS-225-T	DDS-237-T
Power (V / kW)	400 / 3.7	400 / 5.5
Speed of cylinder rotation (tr / min)	1'400	1'400
Cylinder dimensions (ø-mm)	152 x 635	152 x 940
Conveyor Speed (m/min)	3	3
Max sanding width (mm)	635	940
Min. length of the part (mm)	230	230
Max. / min. sanding thickness	133 / 0.8	133 / 0.8
Dust port (ø-mm)	2 x 100	2 x 100
Dimensions (mm)	1'090 x 1'120 x 1'090	1'090 x 1'420 x 1'090
Weight (kg)	332	440
Delivered with	80 grain abrasive tape / pre-installed Sanding belt 100 grit / pre-installed Height crank	Supplied with pre-installed abrasives in 80 and 100 grit User's manual
EAN	7612375702675	7612375702088
DEEE	8.13	11
RANGE	J	J

ABRASIVE SLEEVES

Ref.	Description	Diameter	Height	Grit	Price	Range	EAN
575838	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	60	£ 16.00	J	7612375703597
575839	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	80	£ 14.00	J	7612375703603
575840	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	100	£ 13.00	J	7612375703610
575841	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	150	£ 15.00	J	7612375703627
575842	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	60	£ 22.00	J	7612375703634
575843	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	80	£ 22.00	J	7612375703641
575844	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	100	£ 22.00	J	7612375703658
575845	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	150	£ 29.00	J	7612375703665
575846	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	60	£ 37.00	J	7612375703672
575847	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	80	£ 30.00	J	7612375703689
575848	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	100	£ 30.00	J	7612375703696
575849	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	150	£ 30.00	J	7612375703702
30105084C	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	60	£ 14.00	J	7612375702941
709540	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	80	£ 14.00	J	7612375704686
575800	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	100	£ 15.00	J	7612375703214
575801	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	120	£ 15.00	J	7612375703221
30105084A	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	150	£ 12.00	J	7612375702934
575802	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	60	£ 13.00	J	7612375703238
575803	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	80	£ 14.00	J	7612375703245
575804	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	100	£ 13.00	J	7612375703252
575805	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	120	£ 13.00	J	7612375703269
30105082A	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	150	£ 12.00	J	7612375702927
575806	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	60	£ 14.00	J	7612375703276
575807	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	80	£ 14.00	J	7612375703283
575808	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	100	£ 14.00	J	7612375703290
575809	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	120	£ 14.00	J	7612375703306
30105079A	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	150	£ 12.00	J	7612375702910
575810	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	60	£ 13.00	J	7612375703313
575811	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	80	£ 14.00	J	7612375703320
575812	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	100	£ 14.00	J	7612375703337
575813	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	120	£ 14.00	J	7612375703344
30105076A	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	150	£ 12.00	J	7612375702903
575814	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	60	£ 17.00	J	7612375703351
575815	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	80	£ 17.00	J	7612375703368
575816	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	100	£ 17.00	J	7612375703375
575817	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	120	£ 14.00	J	7612375703382
30105073A	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	150	£ 21.00	J	7612375702897
575818	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	60	£ 19.00	J	7612375703399
575819	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	80	£ 21.00	J	7612375703405
575820	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	100	£ 21.00	J	7612375703412
575821	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	120	£ 21.00	J	7612375703429
30105071A	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	150	£ 21.00	J	7612375702880
575825	Abrasive Sleeves (2 pcs)	1 1/2" – 38,10	230 mm	120	£ 20.00	J	7612375703467
30105068A	Abrasive Sleeves (2 pcs)	1 1/2" – 38,10	230 mm	150	£ 21.00	J	7612375702873
575826	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	60	£ 26.00	J	7612375703474
575827	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	80	£ 26.00	J	7612375703481
575828	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	100	£ 26.00	J	7612375703498
575829	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	120	£ 26.00	J	7612375703504
575830	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	60	£ 29.00	J	7612375703511
575831	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	80	£ 29.00	J	7612375703528
575832	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	100	£ 29.00	J	7612375703535
575833	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	120	£ 33.00	J	7612375703542
30105062A	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	150	£ 33.00	J	7612375702859
575834	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	60	£ 36.00	J	7612375703559
575835	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	80	£ 37.00	J	7612375703566
575836	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	100	£ 37.00	J	7612375703573
575837	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	120	£ 37.00	J	7612375703580
30105060A	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	150	£ 37.00	J	7612375702842



BENCH TOP DRILL

JDP 15B / JDP 15B-T

- This benchtop drill will offer you all the drilling possibilities thanks to its table that can be tilted on both sides
- Equipped with a laser positioning system and LED lighting, you will be able to drill with great precision

230V

400V



Price catalogue EX

£ 869

FLOOR DRILL

JDP-17-M / JDP-17-T

- Particularly large, precision-sharpened work table with
- 2 T-slots and 4 slots in the table for even more flexibility
- Integrated stop for the drilling depth for precision series work
- Xacta-X laser system identifies the centre of the drill bit

230V

400V



Price catalogue EX

£1 125

RADIAL DRILL

JRD-387A-T

- Industrial radial drilling machine for various jobs
- Head can be adjusted horizontally and vertically by means of a toothed rack
- Head can be tilted 30° to the right and 30° to the left
- Adjustable depth stop
- Drilling table 500 x 740 mm, with 3 parallel T-slots
- Integrated base unit with storage compartment

400V



Price catalogue EX

£2 348

	JDP-15-M	JDP-15-T	JDP-17-M	JDP-17-T	JRD-387A-T
Power (V / kW)	230 / 0.55	400 / 0.55	230 / 1.0	400 / 1.0	400 / 1.35
Spindle speed range (rpm)	180 – 2900		180 – 2'900		230 – 3'100
Number of spindle speeds	16		16		9
Max. drilling diameter (ø-mm)	–		–		16
Spindle stroke (mm)			127		85
Spindle attachment	CM2		CM2		CM2
Spindle / column distance (mm)	190		215		140
Distance from spindle to table max. (mm)	470		763		540
Distance from spindle to base max. (mm)	680		1'194		–
Table size (mm)	320 x 454		356 x 483		500 x 740
Mitered T-slot (mm)	13		13 / 270		14
Head tilt	–		–		30° right / 0° / 30° left
Dimensions (mm)	677 x 434 x 1'115		723 x 483 x 1'679		1'740 x 570 x 1'860
Weight (kg)	71		86		210
Delivered with	Self-tightening chuck + Adapter Chuck protector Service spanners Cone chaser Manuals		Self-tightening chuck 1 – 16 mm		Base with pocket Morse taper, CM2 / B16 Self-tightening chuck 3 – 16 mm / B16
EAN	7612375701883	7612375701890	7612375701906	7612375701913	7612375514551
Dece	2.13		2.35		5.25
RANGE	J		J		J

SPINDLE MOULDERS

JWS 34KX-M / JWS 34KX-T

- Its large cast iron table (635 x 600) will offer you a large support surface.
- The Poly V belts make it easy to change speeds.
- Equipped with an attachment identical to that of the JOSS-S spindle sander, this router will give you the possibility of mounting
- the possibility of mounting the sanding spindles of this machine.
- Supplied with 8 and 12 mm collets, you will be able to mount the routers of the handheld routers.

230V

400V

Price catalogue EX

£2 571



	JWS-34KX-M	JWS 34KX-T
Power (V / kW)	230 / 1.5	400 / 2.2
Spindle speed (rpm)	1'700 / 3'500 / 6'000 / 8'000	
Max. tool diameter (mm)	180	
Max. tool height (mm)	70	
Clamping height (mm)	70	
Clamping ring size For router tooling (mm)	8 / 12	
Max Milling Height (mm)	120	
Spindle diameter (ø-mm)	30	
Spindle stroke (mm)	80	
Table opening diameter (ø-mm)	160	
Table dimensions (mm)	635 x 600	
Dust port (ø-mm)	100	
Dimensions (mm)	920 x 680 x 1'090	
Weight (kg)	156	
Delivered with	30 mm shaft + spacers for tooling mounting Shaft protector 8 and 12 mm clamps for router tools Mitre fence Parallel fence Upper holding device Pusher User's manual	
EAN	7612375704341	7612375704358
DEEE	3.62	
RANGE	J	

MORTISERS

719A-M

- Height adjustment of the racks in connection with the precision dovetail guide and the gas pressure compensation cylinder
- Powerful motor
- 180° swivel head for drilling a lock
- Large handwheels for easy adjustment of the coordinate table
- End stop for precision series production
- precision production
- Workpiece clamping device with quick adjustment
- Closed base with storage compartment
- storage compartment
- Table tilt angle (719AS-M only) up to 35°

230V

Price catalogue EX

£1 404



719-AS-M

Price catalogue EX

£1 686

230V



Hedges
Ref : 10003306

JBM-5-M

- Compact, mobile and easy to use in the workshop or on the construction site
- construction site
- Robust cast iron construction
- cast iron for precise work
- With height adjustment of racks and gas pressure compensation cylinder
- Drilling lever movable
- Possibility to adjust the stop, the holding device and the depth stop
- Table top made of MDF, easy to replace
- Supplied without chisel on the picture

230V

Price catalogue EX

£ 501



	719A-M	719AS-M	JBM5-M
Power (V / kW)	230 / 0.75	230 / 0.75	230 / 0.37
Spindle speed (rpm)	1'450	1'450	1'450
Maximum cutting size (hard/soft)	25 x 25	25 x 25	12.7 x 12.7
Max. diameter of drill chuck	13	13	10
Distance Spindle Nose/Table (mm)	295	295	208
Max. room height with extension (mm, optional)	—	—	155
Max. stroke Chisel (mm)	200	200	120
Table displacement (longitudinal / transverse, mm)	400 / 100	400 / 100	—
Table tilt	—	0 – 35°	—
Table dimensions (mm)	520 x 180	520 x 180	345 x 150
Table backrest dimensions (mm)	520 x 90	520 x 90	320 x 40
Throat (table spindle)	100	100	90
Dimensions (mm)	650 x 500 x 1'760	650 x 500 x 1'760	370 x 350 x 750
Weight (kg)	105	116	20
Delivered with	13mm Wrench Chuck Depth stop Length stop 4 chisel adapters (5/8", 3/4", 13/16" and 1.3/16") Closed base with storage compartment		10mm Wrench Chuck + Wrench Depth stop 4 chisel adapters (5/8", 3/4", 13/16" and 1.3/16") Clamp for holding workpieces MDF table top
EAN	7612375702651	7612375704389	7612375509380
DEEE	3.13	3.4	0.58
RANGE	J	J	J

AIR FILTRATION SYSTEM

AFS-1000B-M

- Easy to use air filter system for medium sized rooms
- Quiet cleaning and air filtration
- 98% filtration of all 5 micron particles and 85% of all 1 micron
- of all 1 micron particles
- Depending on your choice, you can hang the air filter system from the ceiling or
- Depending on your choice, you can hang the air filter system from the ceiling or place it on your workbench
- Air flow rate (12 / 15 / 20 m³ / min) and operating time (2, 4, 8 h) are adjustable by remote control



Price catalogue EX

£ 510

230V

AFS-500-M

- Quiet cleaning and air filtration
- Filters 98% of all dust up to 5 microns and 85% of all dust
- of all dust up to 1 micron
- Electrostatic filter on the outside and filter cartridge on the inside, easy to replace or clean by careful vacuuming
- Volume flow adjustable in 3 stages: 6 / 8 / 10 m³ / min
- Controllable exhaust air flow with louvre aerator
- Portable



Price catalogue EX

£ 355

230V

	AFS-1000B-M	AFS-500-M
Power (V / kW)	230 / 0.12	230 / 0.12
Air flow rate (m ³ / h)	720 / 900 / 1'200	360 / 480 / 600
Filter efficiency (internal / external)	5μ(External Filter) and 1μ(Internal Filter)	5μ(External Filter) and 1μ(Internal Filter)
Remote control / timer (h)	Yes / 2, 4, 8	No
Noise level (LpA, dB)	62 / 67 / 69	57 / 59 / 61
Dimensions (mm)	768 x 610 x 305	610 x 400 x 310
Weight (kg)	25	15
Delivered with	External electrostatic filter 5 microns Washable 1μinternal filter Infrared remote control, 2 AA batteries 4 lifting ring screws and 4 fixing brackets	External electrostatic filter 5 microns Internal filter cartridge 1 micron Handle
EAN	7612375704426	7612375704419
DEEE	0.63	0.38
RANGE	J	J

SUCTION SYSTEM

DC-900A-M

- Fully equipped, ideal for a professional craftsman
- Optimum suction power thanks to a powerful
- powerful induction motor and 3D fan wheel
- Finely balanced steel fan wheel for quiet and vibration-free operation
- Simple bag assembly thanks to with the quick-release strap
- Robust, movable metal housing
- 100 mm suction hose and 3 chip bags
- incl. 3 chip bags



Price catalogue EX

£ 344

230V

DC-1200-M

- Proven top product among unfiltered air extractors
- Optimum suction power thanks to powerful induction motor and 3D fan wheel
- Simple bag assembly with quick-release strap
- 4 guide wheels for mobile use

Option : Flexible PVC D100
(Ref : J-10000315 and



Price catalogue EX

£ 566

230V

DC-1900-A

- The only model in the JET range with 2 chip bags, the DC 1900A offers a total capacity of 400 litres,
- Particularly appreciated for its volume of air sucked in, it will meet all your expectations and heavy carpentry work,
- Combined with 5 m (optional), this mobile suction unit will allow you to move it effortlessly.



Price catalogue EX

£ 996

230V

	DC-900A-M	DC-1200-M	DC-1900-A
Power (V / kW)	230 / 0.75	230 / 1.5	400 / 2.2
Air flow rate (m³ / h)	900	1'200	2x900 (Ø 200) 1'180 (Ø 100)
Depression (pA)	1'050	1'880	1'800
Dust inlet diameter (Ø-mm)	100	125	200
Hose diameter (Ø-mm)	100	2 x 100	3 x 100
Filter efficiency with particle size	99 %, 30 Micron	99 %, 30 Micron	99 %, 30 Micron
Bag capacity Collector volume (lt.)	55	150	2 x 200
Bag dimensions (mm)	600 x 900	800 x 1'100	800 x 1'100
Noise level (LpA, dB)	78	80	82
Dimensions (mm)	900 x 450 x 1'600	2'000 x 750 x 1'000	1'550 x 760 x 2'440
Weight (kg)	24	38	86
Options	Flexible Ø 100mm 5 m – J10000312	Flexible Ø 100 mm 5 m – J10000312	Flexible Ø 100 mm 5 m – J10000312
Delivered with	3 cutting bags Suction hose Ø100 mm – 1,50 m	Filter bag, 30 Micron 1 cutting bag Y-bit, 2 x 100 mm 4 swivel castors	2 fabric filter bags Y-fitting in 3 x Ø100 mm 2 sets of 5 chip bags
EAN	7612375505689	7612375508413	7612375704433
DEEE	0.6	1.0	2.15
RANGE	J	J	J

SUCTION SYSTEM

DC-1100A-M

- Powerful universal vacuum cleaner with large suction volume and innovative Vortex-Cone technology
- Efficient induction motor designed for continuous operation
- Only very fine air and particles reach the filter area; no reduction in performance due to prematurely clogged filter blades

230V

Innovative cone technology from VORTEX



400V



Price catalogue EX

£ 545

DC-1100A-T

DC-1100CK-M

- Supplied as standard with filter cartridge 2, this model will enhance the suction of very fine particles
- Only very fine air and particles reach the filter area; no drop in performance due to prematurely blocked filter blades
- Efficient induction motor designed for continuous operation

230V

Innovative cone technology from VORTEX



Includes : Cartridge
(Ref : 708739)

Price catalogue EX

£ 825

400V



	DC-1100A-M	DC-1100A-T	DC-1100CK-M	DC-1100CK-T
Power (V / kW)	230 / 1.1	400 / 1.1	230 / 1.1	400 / 1.1
Air flow rate (m³ / h)	1'150 (Ø 100) – 1'620 (Ø 150)		1'150 / 1'620	
Depression (pA)	1'700		1'700	
Dust inlet diameter (Ø-mm)	150		150	
Hose diameter (Ø-mm)	2 x 100		2 x 100	
Filter efficiency with particle size	99 %, 30 Micron		99 %, 2 Micron	
Bag capacity Collector volume (lt.)	200		200	
Bag dimensions (mm)	800 x 1'100		800 x 1'100	
Noise level (LpA, dB)	80		80	
Dimensions (mm)	940 x 510 x 2'000		940 x 510 x 1'830	
Weight (kg)	48		71	
Option	Flexible Ø 100 mm 5 m – J10000312		Flexible Ø 100 mm 5 m – J10000312	
Delivered with	Supplied with 30 micron fabric filter as standard 2 x 100 mm Y-tip 5 chip bags Suction hose not included User manual Optional 2µm filter cartridge (708739) as an option.		Supplied as standard with 2 micron filter cartridge 2 x 100 mm Y-tip 5 chip bags Suction hose not included User manual	
EAN	761237570440	7612375704457	7612375512557	7612375512564
DEEE	1.2		1.43	
RANGE	J		J	

SUCTION SYSTEM CYCLONE

JCDC-15-M

- More suction power for the same motor power, quiet during operation
- Two-stage air filtration, the unit works more efficiently
- High performance cyclone function, separates chips and dust
- 99% filter efficiency for particles ≥ 2 microns
- Filter cartridge with cleaning phase activated by a manual lever
- For fast emptying, the drum has quick-lock systems and separate guide wheels
- Guide wheels on the unit allow mobile use in the workshop
- JCDC-1.5-M: Chips are collected in a metal drum with a capacity of 75 litres
- JCDC-2.0-M | JCDC-3.0-T: With radio remote control with a range of 15 metres, with timer for 2, 4, 6, 8 hours
- Chips are collected in a metal drum with a capacity of 250 litres

230V



Price catalogue EX

£1 764

230V



Price catalogue EX

£2 399

400V



Price catalogue EX

£3 121

	JCDC-15-M	JCDC-20-M	JCDC-30-T
Power (V / kW)	230 / 1.1	230 / 1.5	400 / 2.2
Air flow rate (m ³ / h)	1'527	2'160	2'540
Depression (pA)	1'350	1'600	1'700
Dust inlet diameter (ø-mm)	152	152	203
Hose diameter (ø-mm)	2 x 100	2 x 100	800 x 1'100
Filter efficiency with particle size	99 %, 2 Microns	99 %, 2 Microns	99 %, 2 Microns
Drum collection volume (lt.)	75	115	250
Noise level (LpA, dB)	76	76	76
Bag dimensions (mm)	660 x 700 (Copeaux) 500 x 600 (poussières)	780 x 830 (Copeaux) 500 x 600 (poussières)	980 x 1200 (Copeaux) 500 x 600 (poussières)
Remote control / timer (h)	No	Yes / 2, 4, 6, 8 h	Yes / 2, 4, 6, 8 h
Dimensions (mm)	1'195 x 560 x 1'715	1'285 x 660 x 1'835	1'450 x 770 x 2'235
Weight (kg)	65	94	110
Delivered with	2 chip bags Y-tip in 2 x 100 User Manual	2 chip bags Y-tip in 2 x 100 User Manual Remote control + 2 AAA bat- teries	2 Chip Bags Y-tip 3 x 100 User Manual Remote control + 2 AAA batteries
Option	Flexible Ø 100mm 5 m – J10000312	Flexible Ø 100mm 5 m – J10000312	Flexible Ø 100 mm 5 m – J10000312
EAN	7612375513820	7612375521122	7612375521146
DEEE	1.63	2.2	2.5
RANGE	J	J	J

	Ref.	Description	Price EX	Range	EAN
	J_10000315	Flexible PVC Ø 100 mm – 2,5 m	£121.00	J	7612375692624
	J_10000312	Flexible PVC Ø 100 mm – 5 m	£153.00	J	3506111747379
	JW 1022	Galvanised clamping ring Ø 100 mm	£ 9.00	J	7612375515602
	JW 1019	Connection Ø 100 mm for hose extension	£ 12.00	J	7612375515596
	JW 1015	Connection Y Ø 100 mm	£ 14.00	J	7612375704938
	JW 1013	Connection T Ø 100 mm	£ 14.00	J	7612375515572
	JW 1017	90° elbow fitting Ø 100 mm	£ 17.00	J	7612375515589
	JW 1005	Universal cover Ø 100 mm – 355 x 355 mm	£ 25.00	J	662755122156
	JW 1001	Universal cover Ø 100 mm – 210 x 210 mm	£ 14.00	J	7612375704877
	JW 1010	Universal cover Ø 100 mm – 158 x 158 mm	£ 25.00	J	662755122200
	JW 1003	Floor Suction Nozzle Ø 100 mm	£ 28.00	J	7612375704884
	JW 1047	Machine connection Ø 100 mm	£ 13.00	J	7612375515626
	JW 1039	Suction connection Ø 25 to Ø 150 mm	£ 19.00	J	7612375704976
	JW 1000	Reduction Sleeve Ø 100 to 50mm	£ 13.00	J	7612375515640
	JW 1053	Earth connection (12 m copper)	£ 37.00	J	662755787133
	JW 1007	Plastic Stop Valve Ø 100 mm	£ 19.00	J	7612375692600
	JW 1142	Alu Stop Valve Ø 100 mm	£ 21.00	J	7612375515619
	709563	Chip Bags (5pcs) DC1100A/1200/1900	£ 19.00	J	7612375704693
	10000311	Chip Bags (5pcs) DC900A/DC1300	£ 12.00	J	7612375701746
	708739	DC 1100A/DC1900 2µ Filter Cartridge	£242.00	J	7612375704587
	10000310	DC 1300 Filter Cartridge	£279.00	J	7612375701739
	848720	DC1100A/DC1300 30µ Fabric Filter	£ 41.00	J	7612375692617
	70873110	Outdoor Electrostatic Filter AFS500/AFS1000B (10 pcs)	£144.00	J	7612375704501
	J_70873405	Outdoor Carbon Filter AFS500/AFS1000B (5 pcs)	£209.00	J	7612375704549
	J_70873305	AFS 1000B Washable Inner Filter (5 pcs)	£381.00	J	7612375704525
	J_70873505	Filtre Intérieur AFS 500 (5 pcs)	£239.00	J	7612375704563

BENCH VICES ON ROTATING BASE

 - Built for heavy duty use and long life 360° rotating base - Ideal for everyday use and use and for craftsmen	REF	63300EU	63301EU	63302EU	63304EU
	Jaw width (mm)	100	125	150	200
	Vice opening (mm)	100	125	150	200
	Clamping capacity (mm)	70	75	88	100
	Capacity Tube Clamp (mm)	20 – 50	20 – 60	20 – 65	20 – 76
	Weight	10	14	19	30
	EAN	7612375800210	7612375800227	7612375800234	7612375800241
	RANGE	A	A	A	A
	Price EX	£ 84.00	£ 102.00	£ 138.00	£ 217.00
 - Cast iron construction for heavy duty use and long life - Permanent lubrication of the slides - Ideal for maintenance workshops, car mechanics or repairs of any kind	REF	22300EU	22400EU	22500EU	22800EU
	Jaw width (mm)	100	125	150	200
	Vice opening (mm)	115	133	150	210
	Clamping capacity (mm)	87	95	105	115
	Capacity Tube Clamp (mm)	6 – 50	6 – 65	6 – 90	6 – 90
	Weight	17	23	29	40
	EAN	7612375800173	7612375800180	7612375800197	7612375800203
	RANGE	A	A	A	A
	Price EX	£ 113.00	£ 137.00	£ 168.00	£ 206.00
 - Cast iron construction for heavy duty use and long life - Permanent lubrication of the slides - Ideal for maintenance workshops, car mechanics or repairs of any kind	REF	21300EU	21400EU	21500EU	21800EU
	Jaw width (mm)	100	125	150	200
	Vice opening (mm)	115	130	145	210
	Clamping capacity (mm)	87	95	105	115
	Capacity Tube Clamp (mm)	6 – 50	6 – 65	6 – 90	6 – 90
	Weight	19	25	32	44
	EAN	7612375800135	7612375800142	7612375800159	7612375800166
	RANGE	A	A	A	A
	Price EX	£ 131.00	£ 160.00	£ 205.00	£ 240.00

ROLLER SERVERS ON ROTATING BASE



MODEL	2146	2147	2148	HRS-V
Width of Rolls (mm)	400	400	330	250
Adjustment Height (mm)	580 – 950	640 – 940	560 – 940	600 – 950
Number of rolls	1	5	1 Rolls, 7 ball	2 to V
Weight	6	13	5.8	17
Maxi loads (kg)	70	70	50	250
EAN	7612375601909	7612375601916	7612375504781	7612375703177
RANGE	A	A	A	A
Price EX	£ 78.00	£ 118.00	£ 90.00	£ 145.00

ENGRAVERS

DEM-0906

- Lightweight, portable, desktop CNC engraver for wood, acrylic, foam, polyester and soft metal
- Carves tool boards, tool boxes, small ornaments and many other projects
- 150 watt motor power and variable speed up to 15,000 rpm
- The engraver comes with software (easy to understand) and tools and arrives fully assembled
- Belt drive moves the X, Y and Z axes

230V



Price catalogue EX

£1 605

DEM-1717

- Portable desktop CNC engraver for wood, acrylic, foam, polyester and soft metal
- Carves tool boards, tool boxes, small ornaments and many other projects
- 200 watt motor power and variable speed up to 20,000 rpm
- The engraver comes with (easy to understand) software and tools and arrives fully assembled
- Belt drive moves the X, Y and Z axes

230V



Price catalogue EX

£1 873

DEM-2720

- Desktop CNC engraver working with wood, acrylic, foam, polyester and soft metal
- Carves tool boards, tool boxes, small ornaments and many other projects
- 200 watt motor power and variable speed up to 20,000 rpm
- The engraver comes complete with software (easy to understand) and tools and arrives fully assembled
- Belt drive moves the X, Y and Z axes

230V



Price catalogue EX

£3 477

	DEM-0906	DEM-1717	DEM-2720
Power (V / kW)	230 / 0.15	230 / 0.20	230 / 0.20
T-slot table	4	4	30
Working area (mm)	220 x 160	304 x 304	508 x 762
Z axis travel (mm)	62	101	101
Maximum travel and engraving speed (mm/min)	2500	2500	2500
Speed range (rpm)	0 - 20000	0 - 20000	0 - 20000
Tool diameter ER-11 (mm)	4 (Vis BTR)	4 (Pince ER 999)	4 (Pince ER 11)
Dimensions (mm)	390 x 400 x 424	540 x 530 x 530	800 x 990 x 548
Weight	14	38	70
DEEE	0.35	0.95	1.75
RANGE	U	U	U

WORKSHOP TROLLEYS

- Lockable ball bearing drawers with full opening, magnetic drawer marking and individual locking
- 2 heavy-duty oil-resistant swivel/fixed castors with locking system
- Separate side compartment with storage space and perforated wall
- CNC-milled foam insert: robust, washable, oil-resistant and with an attractive metallic look

EMPTY CHEST - TT-WKS-MTY

- Empty trolley that can be arranged to suit your needs
- Separate side compartment with storage space and perforated wall
- Sliding and lockable tool wall
- 2 sturdy, oil-resistant swivel/fixed castors with locking system

Price catalogue EX

£ 946



TT-WKS-MTY

Dimensions 835 x 540 x 980 mm

Weight 82.9 kg

RANGE T

TT-318

1/4"

1/2"


3/8"



Price catalogue EX

£1 561

318-PCS.

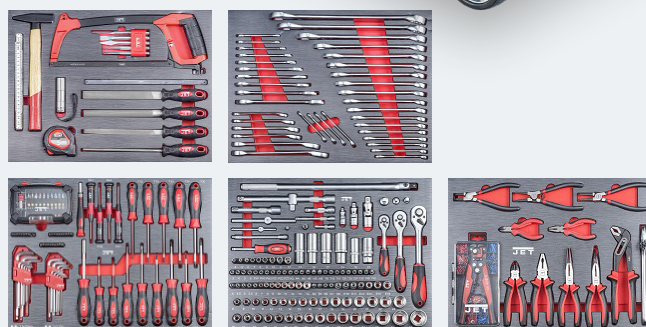

TT-318

1/2" 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 22 / 24 / 27 / 30 / 32 mm

3/8" 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 24 mm

1/4" 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm

780 x 455 x 985 mm

91 kg

EAN 7612375533170

RANGE T

WORKSHOP TROLLEYS



- Fitted with 412 quality tools
- 8 ball bearing drawers with full opening, magnetic marking of the drawers and individual locking
- Separate side compartment with storage space and perforated wall
- Sliding and locking tool wall (TT-412-WKS)
- 2 heavy-duty oil-resistant swivel/fixed castors with locking system
- CNC-milled foam insert: robust, washable, oil-resistant and with an attractive metallic look

TT-412

1/4"

1/2"

3/8"

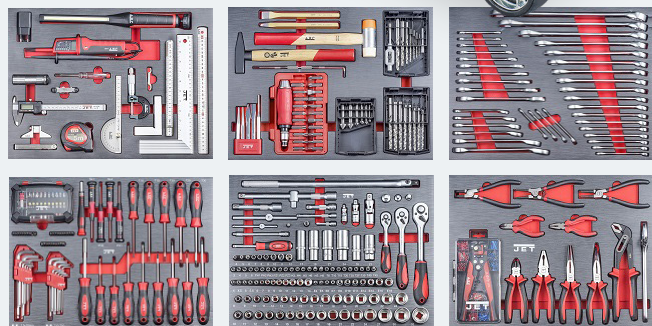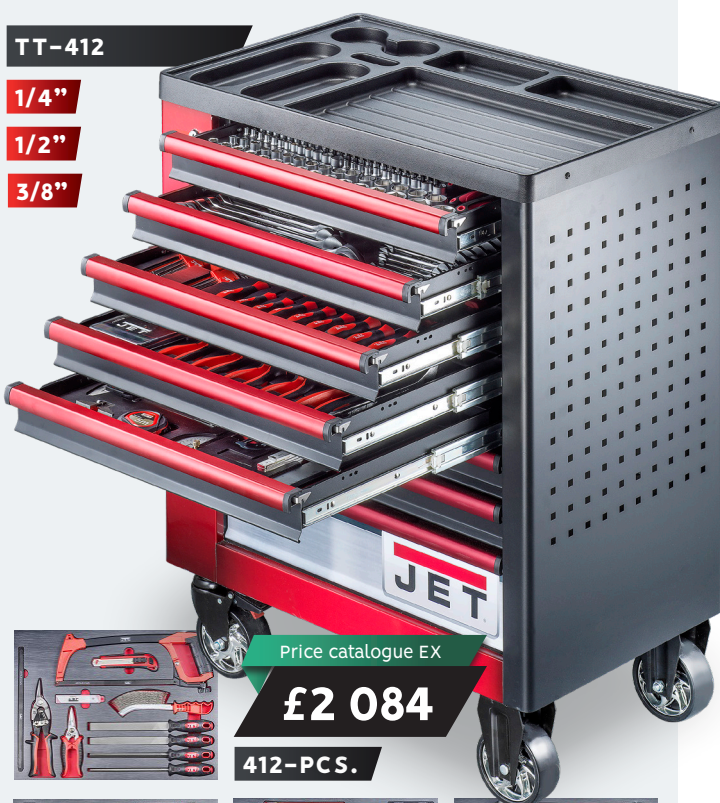

TT-412WKS

1/4"

1/2"

3/8"



TT-412

1/2"	10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 22 / 24 / 27 / 30 / 32 mm
3/8"	8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 24 mm
1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	780 x 455 x 985 mm
	97.5 kg
EAN	7612375533163
RANGE	T

TT-412 WKS

1/2"	10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 22 / 24 / 27 / 30 / 32 mm
3/8"	8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 24 mm
1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	835 x 540 x 980 (1'575) mm
	112.8 kg
EAN	7612375533156
RANGE	T

MAINTENANCE CASE

Y-136C

1/4"

1/2"

- Robust ALU case
- Fabric pockets with double stitching for maximum durability
- Two-tone foam insert for excellent storage and overview
- Compact and lightweight, ideal for assembly and service work



Price catalogue EX

£ 274

136-PCS.

Y-136C

1/2"	10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm
1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	8 / 9 / 10 / 11 / 12 / 13 / 14 / 16 / 17 mm
	465 x 370 x 150 mm
	13 kg
EAN	7612375534146




TOOL CASE

A-179-EXE

1/4"

1/2"

- CNC milled foam insert: robust, washable, and with an attractive metallic look
- Canvas pockets with double stitching for maximum durability
- Fitted with original PB SWISS TOOLS screwdrivers

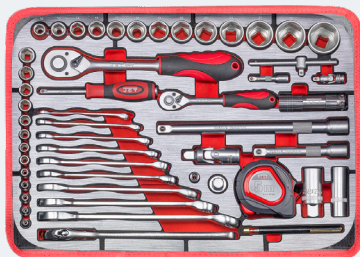

Price catalogue EX

£ 352

179-PCS.



Dimensions

1/2" 10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm

1/4" 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm

8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm

475 x 370 x 170 mm

Weight 13 kg

EAN 7612375531329

RANGE T

TOOL CASE

Y-149B

- 149 quality pieces
- With aluminium case
- With compact black foam
- Moveable thanks to the wheels

Dimensions

 1/2"	10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm
 1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm
	540 x 460 x 170 mm
	16.6 kg
EAN	7612375513035
RANGE	T



Price catalogue EX

£ 457

244-PCS.

Y-59B

- Ergonomic tools of excellent quality, for optimum ease of use
- Compartments for personal tools or small parts
- Two-coloured compact foam inserts to ensure a perfect fit and keep and to keep the tools in order



Dimensions

3/8"	6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 23 / 24 mm
	8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm
EAN	7612375508499
RANGE	T



Price catalogue EX

£ 223

59-PCS.

Y-114C

- Perfect for small quick maintenance / service vehicles
- With this set, the right tool is always at hand
- Robust housing with compact dimensions



Dimensions

3/8"	10 / 11 / 12 / 13 / 14 / 15 / 17 / 18 / 19 / 22 / 24 mm
1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 mm
	8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 mm
EAN	7612375527933
RANGE	T



Price catalogue EX

£ 155

114-PCS.

TOOL CASE

Y-116B

116-PCS.

1/4"

1/2"

- The ideal toolbox for maintenance and home use
- Complete selection of handy, well-balanced tools
- and balanced tools of excellent quality
- Two-coloured compact foam inserts to ensure a perfect
- and to keep the tools in order
- Solid aluminium case



Price catalogue EX

£ 257



Dimensions

1/4" 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm

1/2" 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 mm



8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm

EAN 7612375508505

RANGE T

Y-135B

1/4"

1/2"

- 1/4" sockets 4-14 mm
- 1/2" sockets 10-32 mm
- Combination spanners: 8-22 mm
- Adjustable spanner: 10
- Screwdrivers 5-pcs
- Various bits

136-PCS.

Price catalogue EX

£ 353



Dimensions

1/2" 10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm

1/4" 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm



8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm

EAN 7612375903157

RANGE T

STEEL CASES

Z-760-B

60-PCS.

Price catalogue EX

£ 233

Par box de 6

Dimensions

 1/2"	E4 / E5 / E6 / E7 / E8 / E10 / E11 / E12 / E14 / E16 / E18 / E20
	T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50 / T55
EAN	7612375515817
RANGE	T



Z-760

Par box de 1

Price catalogue EX

£ 43

3/8"

1/4"

1/2"

Z-725B

Price catalogue EX

£ 86


- With «SUPERLOCK» sockets: the torque is 100% on the flat surface of the bolts and not on the corners, thanks to the new corrugated inner profiles of the SUPERLOCK sockets.
- - Prevents deformation of the bolt heads
- - 15% more tightening torque
- 90 tooth quick release ratchet handle

25-PCS.

Par box de 6

Dimensions

3/8"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8
1/4"	9 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 20 / 21 / 22 / 24
EAN	7612375513004
RANGE	T

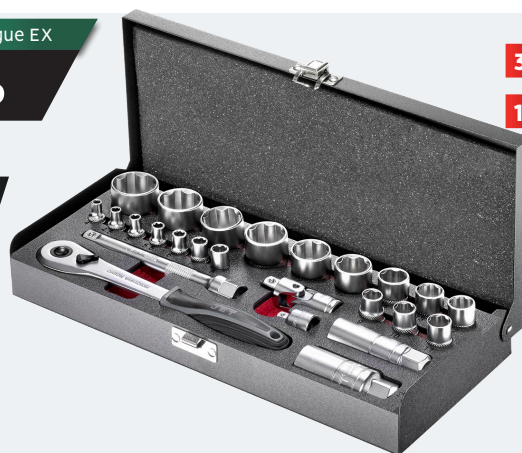

3/8"

1/4"

Z-782I

82-PCS.

Price catalogue EX

£ 266


- Tools delivered in a robust metal case

1/4"

1/2"

Dimensions

 1/2"	14 / 15 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32		T8 / T10 / T15 / T20 / T25 / T30
	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 mm		8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm
	3 / 4 / 5 / 6	EAN	7612376092058
	PH1 / PH2	Range	T
	PZ1 / PZ2		

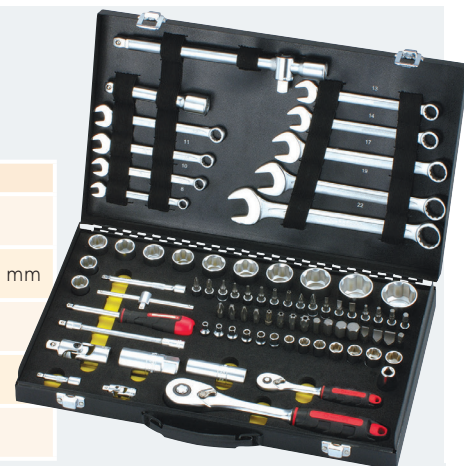

Z-715B

- The heavy-duty set, for use wherever a particularly long lever is required
- Powerful tools of the highest quality quality guarantee a long service life
- Tools supplied in a sturdy metal case

3/4 inch square ratchet



Price catalogue EX

£ 265

12-PCS.

3/4"

Dimensions

	27 / 30 / 32 / 36 / 38 / 41 / 46 / 50 / 55 / 60 mm
EAN	7612375515817
RANGE	T

SOCKET AND BIT SETS

- CNC-milled foam insert: robust, washable, oil-resistant and with an attractive metallic appearance
- Robust plastic housing with metal hinges and locks, easily withstands the toughest of demands
- Suitable for all workshops, toolboxes and service vehicles
- Precision workmanship ensures that every tool has a perfect fit

X-546-D

1/4"



46-PCS.

Price catalogue EX

£ 57

X-31

1/2"



31-PCS.

Price catalogue EX

£ 98

X-61

3/8"



61-PCS.

Price catalogue EX

£ 101

X-546-D		X-31		X-61	
	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm		10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 21 / 22 / 24 / 27 / 30 / 32 mm		5.5 / 6 / 7 / 8 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 24 mm
	3 / 4 / 5 / 6 / 7 / 8 mm				3 / 4 / 5 / 6 / 7 / 8 / 10 mm
	4 / 5.5 / 7 mm				5.5 / 7 / 8 mm
	PH0 / PH1 / PH2 / PH3				PH1 / PH2 / PH3
	PZ0 / PZ1 / PZ2 / PZ3				PZ1 / PZ2 / PZ3
	T8 / T10 / T15 / T20 / T25 / T30 / T40				T8 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50
	250 x 120 x 45 mm		250 x 120 x 45 mm		345 x 275 x 80 mm
	1.2 kg		1.2 kg		4.5 kg
EAN	7612375504781	EAN	7612375531428	EAN	7612375531411
RANGE	T	RANGE	T	RANGE	T

SOCKET AND SPANNER / PLIERS

- CNC-milled foam insert: robust, washable, oil-resistant and with an attractive metallic appearance
- Robust plastic housing with metal hinges and locks, easily withstands the toughest of demands
- Suitable for all workshops, toolboxes and service vehicles
- Precision workmanship ensures that every tool has a perfect fit

X-582C

1/4"

1/2"



Price catalogue EX

£ 122

82-PCS.

X-165

1/4"

1/2"



Price catalogue EX

£ 265

165-PCS.

X-582C

1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm	1/2"	13 / 14 / 15 / 16 / 17 / 18 / 19 / 22 / 24 / 27 / 30 / 32 mm
	3 / 4 / 5 / 6 mm	5/16"	8 / 10 / 12 / 14 mm
	4 / 5.5 / 7 mm		5 / 7 / 8 / 10 / 12 mm
	PH1 / PH2	5/16"	PH3 / PH4
	PZ1 / PZ2	5/16"	PZ3 / PZ4
	T8 / T10 / T15 / T20 / T25 / T30	5/16"	T40 / T45 / T50 / T55
	8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm		
	425 x 305 x 90 mm		
	6.4 kg		
EAN	7612375531473		
RANGE	T		

X-165

1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
1/2"	10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 23 / 24 / 27 / 30 / 32 mm
	5 x 5.5 / 6 x 7 / 8 x 9 / 10 x 11 / 12 x 13 / 14 x 15 / 16 x 17 / 18 x 19 mm
	476 x 388 x 108 mm
	9.9 kg
EAN	7612375531442
RANGE	T

SOCKET AND BIT SETS

X-5106B

1/4"

1/2"

- Best selection of easy-to-handle and
- and balanced tools of excellent quality
- Robust plastic case with firm hold of the tools in the case, yet easy to pick up and put down
- With «SUPERLOCK» sockets: the torque is 100% on the flat surface of the bolts and nuts thanks to the new corrugated inner profile of the SUPERLOCK sockets,
- The torque is 100% on the flat surface of the bolts and not on the corners.
- - Prevents deformation of the bolt heads
- - 15% more torque

106-PCS.



Price catalogue EX

£ 232

EAN	7612375513172
RANGE	T

X-48

48-PCS.

- CNC milled foam insert: robust, washable and with an attractive metallic appearance
- Thanks to precision manufacturing, each tool has a
- tool has a perfect fit
- Robust plastic housing with two hinges and metal and metal fasteners, can easily withstand the toughest demands
- Suitable for all workshops, toolboxes or the service vehicle



Price catalogue EX

£ 70

Dimensions

	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	260 x 180 x 60 mm
	1.5 kg
	3 / 4 / 5 / 6 / 7 / 8 mm
	3 / 4 / 4.5 / 5 / 6 mm
	PH0 / PH1 / PH2 / PH3
	PZ0 / PZ1 / PZ2 / PZ3
	T8 / T10 / T15 / T20 / T25 / T30 / T40
EAN	7612375531428
RANGE	T

SET OF BITS

BT-22B

Price catalogue EX

£ 17

- Colour-coded torsion bits in S2 quality
- and special shank for 30% higher torque
- Bit boxes in JET design: robust, functional and long and long-lasting
- With rubber coating
- With «anti-slip» rubber coating

Dimensions

	PH1 / 2 x PH2
	PZ1 / PZ2 / PZ3
	2 x T10 / 2 x T15 / 2 x T20 / 4 x T25 / 2 x T30 / 2 x T40

	90 x 53 x 20 mm
--	-----------------

	0.16 kg
--	---------

EAN	7612375532227
-----	---------------

RANGE	T
-------	---



22-PCS.

B-127

Price catalogue EX

£ 63

- «Bit-Box» set including
- 127 bits and bit holders.
- The set includes :
- SL flat bits: 3 - 4 - 4.5 (x3) - 6 - 6.5 - 7 - 8 mm
- Philips bits: PH0 - PH1 - PH2 (x5) - PH3
- Pozidriv bits: PZ1 - PZ2 (x5) - PZ3 (x2)
- Torx tamper-proof bits: T8T - T10T - T15T - T20T - T25T (x2) - T30T (x2) - T40T
- Torx Bits: T8 - T10 - T15 - T20 - T27 - T30 - T40 - T45
- Hex Bits: 1/16 - 5/64 -
- 3/32 - 7/64 - 1/8 - 5/32 - 3/16 - 7/32 -
- 1.5 - 2 - 2.5 - 4 - 5 - 6 - 7 mm
- Hexagonal Screwdriver Bits :
- H2T (x2) - H2.5T (x2) - H3T (x2) -
- H4T (x2) - H5T (x2) - H6T (x4)
- Square bits: R0 - R1 - R2 - R3
- Spanner bits: SP4 - SP6 - SP8
- Tri-Wing bits: Tri1 - Tri2 - Tri3 - Tri4
- Torq set bits: TQ4 - TQ6 - TQ8 - TQ10
- TQ8 - TQ10

EAN	7612375532265
-----	---------------

RANGE	T
-------	---



BC-44B

31-PCS.

1/4"

- Parfait pour chaque caisse d'outils
- Embouts avec signe distinctif en couleur pour le maniement plus rapide et facile
- Clé à cliquet 1/4" de haute valeur, mince mais robuste
- Douilles 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 mm
- Livraison dans présentoir avec 6-pcs.

Price catalogue EX

£ 75



25 mm

	6 / 7 / 8 / 9 / 10 / 12 / 13 mm
	3 / 4 / 5 / 6
	3 / 4 / 5 / 6
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375692877
RANGE	T

BC-53TC

1/4"

53-PCS.

Price catalogue EX

£ 59



25 mm

	3 / 4 / 5 / 6 mm
	3 / 4 / 5 / 6 mm
	2 x PH1 / 2 x PH2 / PH3
	2 x PZ1 / 2 x PZ2 / PZ3
	T10 / T15 / 2 x T20 / 2 x T25 / T27 / 2 x T30 / 2 x T40

75 mm

	3 / 4 / 5 / 6 mm
	3 / 4 / 5 / 6 mm
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T10 / T15 / T20 / 2 x T25 / T27 / T30 / T40
	155 x 104 x 59 mm
	0.7 kg
EAN	7612375531459
RANGE	T

SET OF BITS

B-31D-2

- Robust case with rotating belt clip
- S2 quality tips

31-PCS.

INOX version available

Available with end caps
with holes : B-31DB

Price catalogue EX

£ 213



12 sets per pack

25 mm

	3 / 4 / 5 / 6 mm
	3 / 4 / 5 / 6 mm
	PH1 / PH2 (2 x) / PH3
	PZ1 / PZ2 (2 x) / PZ3
	2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T27 / 2 x T30 / 2 x T40
EAN	7612375520873
RANGE	T

B-37

- Robust case with rotating belt clip
- S2 quality tips

31-PCS.

Price catalogue EX

£ 69



25 mm

	3 / 4 / 5
	3 / 4 / 5 / 6
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T10 - 40
EAN	7612375520866
RANGE	T

B-65

- Large selection of 25 + 75 mm tips
- With coloured markings
- Torsion» bits for 30% more torque

31-PCS.

Price catalogue EX

£ 86



25 mm

	3 / 4 / 5 / 6
	3 / 4 / 5 / 6
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375520873
RANGE	T

SET OF BITS

BC-71C

- 25 + 75 mm
- Torsion» bits for
- 30% more torque
- Bits with a distinctive sign
- in colour
- for faster and easier
- quicker and easier handling
- Delivered in a display with 6 pcs

Price catalogue EX

£ 47

71-PCS.



1/4"

25 mm		75 mm	
	3 x 4 / 3 x 5 / 3 x 6 mm		4 / 6 mm
	3 x 4 / 3 x 6 mm		PH1 / PH2 / PH3
	3 x PH1 / 3 x PH2 / 3 x PH3		PZ1 / PZ2
	3 x PZ1 / 3 x PZ2 / 3 x PZ3		T20 / T25
	3 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T27 / 3 x T30 / 3 x T40	EAN	761237513066
		RANGE	T

BC-86D

- 25 + 90 mm
- End caps with coloured markings for faster and easier handling
- Torsion» bits for 30% more torque
- Pressed-in handles
- Quick bit holder and magnetic bit holders
- Delivered in display with 6 pcs

Price catalogue EX

£ 97

86-PCS.



1/4"

25 mm		90 mm	
	5 x 4 / 5 x 5 / 5 x 6 mm		3 x PH2
	5 x 4 / 5 x 6 mm		3 x PZ2
	5 x PH1 / 5 x PH2 / 5 x PH3		T10 / T15 / 3 x T20 / T25 / T30
	5 x PZ1 / 5 x PZ2 / 5 x PZ3	EAN	761237513233
	3 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T27 / 3 x T30 / 3 x T40	RANGE	T

B-100-BULK

- In plastic box
- Universal bit set

Price catalogue EX

£ 59

100-PCS.



1/4"

25 mm	
	4 / 5 / 6
	5.5 / 6 / 10
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T8 / T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375901214
RANGE	T

B-25 B

- End caps with a length of 125 mm :
- ideal for kitchen and blind construction
- Robust plastic housing

Price catalogue EX

£ 64

25-PCS.



1/4"

25 mm	
	3.5 / 4.5 / 5.5 / 6.5 mm
	PH0 / PH1 / PH2 / PH3
	PZ0 / PZ1 / PZ2 / PZ3
	T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375901993
RANGE	T

SCREWDRIVER SETS

S-8



Price catalogue EX

£ 25

8-PCS.

EAN	7612375901214
RANGE	T

S-5-SL-PZ-VDE

Price catalogue EX

£ 21

- High quality screwdriver with ergonomic handle
- S2 steel blades, with parallel grounding
- Grounded, black tip
- Protective insulation for work



5-PCS.

Dimensions

—	2.5 / 4 mm
+	PZ0 / PZ1 / PZ2
RANGE	T

S-6-TX

Price catalogue EX

£ 24

- High quality screwdriver with ergonomic handle
- S2 steel blades

6-PCS.



Dimensions

✳	T10 / T15 / T20 / T25 / T30 / T40
RANGE	T


S-6-SL-PZ

Price catalogue EX

£ 22

- High quality screwdriver with ergonomic handle
- S2 steel blades, with parallel grounding grounded, black tip

6-PCS.

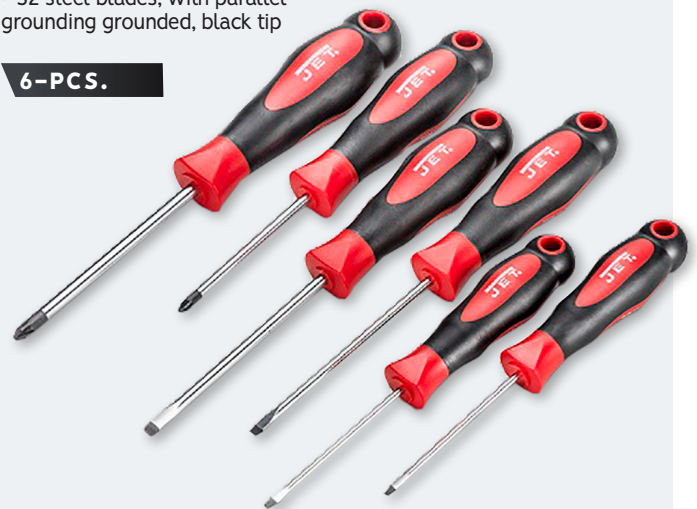

Dimensions

—	2 / 3 / 4 / 5 mm
+	PZ1 / PZ2
RANGE	T

COMBINATION SPANNERS (POUCH - RATCHET - BOX)

Q-707F

- 7 reversible ratchet spanners 72 teeth
- 180° tiltable
- 8, 10, 12, 13, 14, 17 and 19 mm

Price catalogue EX

£ 93



3/4"


7-PCS.

Dimensions

EAN	7612375903645
RANGE	T

Q-706C

- 5° inclined, reversible
- Chrome vanadium, polished

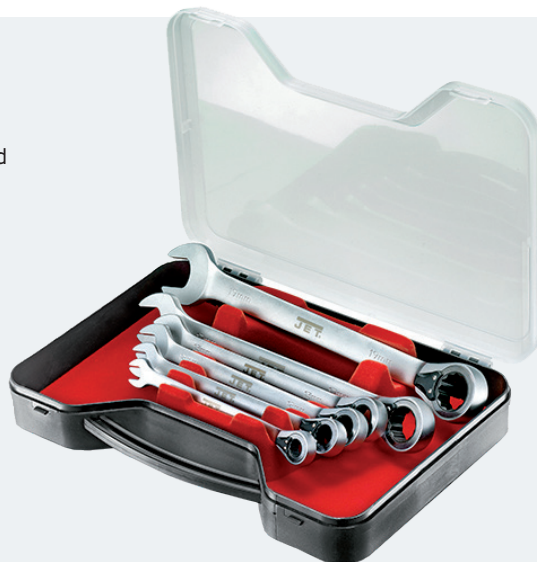

3/4"

Price catalogue EX

£ 77

6-PCS.

Dimensions

	8 / 10 / 12 / 13 / 17 / 19 mm
EAN	7612375901375
RANGE	T

TORQUE WRENCHES

- Impressive processing quality
- Accuracy + / -4%, from ISO 6789-1: 2017
- Adjustable left and right
- Delivered in a plastic box



1/4"

1/2"

3/8"

Ref	Z-25B	Z-100B	Z-200B	Z-250B	Z-335B
N° art. SAP.	1000-022-574	1000-022-575	1000-022-576	-	1000-022-577
Square drive inches	1/4"	3/8"	1/2"	1/2"	1/2"
Torque adjustment (Nm)	4 - 20	20 - 100	40 - 200	50 - 300	65 - 335
Division (Nm)	0.05	0.25	0.5	-	0.75
Length (mm)	285	438	463	600	523
Weight (kg)	0.54	0.9	1.02	1.8	1.16
Price EX	£ 91.00	£ 94.00	£ 97.00	£ 109.00	£ 120.00

COMBINATION SPANNERS AND PLIERS

X-504B

- Comes in a roll-up case
- Ideal for the toolbox or service vehicle



Price catalogue EX

£ 43

4-PCS.

Dimensions



24 / 27 / 30 / 32 mm

EAN 7612375532296

RANGE T

X-518

- Comes in a roll-up case
- Ideal for the toolbox or service vehicle



Price catalogue EX

£ 57

18-PCS.

Dimensions



5,5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 mm

EAN 7612375532289

RANGE T

X-198

- For easy stripping of cable diameters from 0.2 to 6 mm2
- Stripping length adjustable by means of a fine adjustment screw
- For crimping insulated and non-insulated cable lugs
- Ergonomic 2-component handle for maximum power transmission
- With 197 insulated terminals



Price catalogue EX

£ 23

198-PCS.

Supplied with terminal box

Dimensions



215 x 120 x 35 mm



0.6 kg

EAN 7612375534252

RANGE T

X-4

- Ergonomic 2-component handles
 - Hardened and ground pliers
- Contenu :
- Rib cutters, 160 mm
 - Universal pliers, 180 mm
 - Straight nose pliers, 200 mm
 - Multi-purpose pliers, 250 mm



Price catalogue EX

£ 44

4-PCS.

Dimensions



290 x 40 x 310 mm



1.3 kg

EAN 7612375532302

RANGE T

DRILL BIT SETS - COUNTERSINK - STEP DRILLS

D-19GS

- HSS-G
- To DIN 338
- Ground
- Type N
- Right-hand cut
- ϕ 1.0 – 10.0 mm,
- at intervals of 0.5 mm

19-PCS.

Price catalogue EX

£ 23

Dimensions

 170 x 115 x 40 mm

 0.56 kg

EAN 7612375903133

RANGE A

D-19CO

- HSS-CO
- According to DIN 338
- Ground
- Cobalt M35
- Type N
- Right-hand cut
- ϕ 1.0 – 10.0 mm,
- at intervals of 0.5 mm

19-PCS.

Price catalogue EX

£ 53

Dimensions

 170 x 115 x 40 mm

 0.56 kg

EAN 7612375903157

RANGE A

D-25GS

- HSS-G
- To DIN 338
- Ground
- Type N
- Right-hand cut
- ϕ 1.0 – 13.0 mm,
- at intervals of 0.5 mm

25-PCS.

Price catalogue EX

£ 48

Dimensions

 198 x 115 x 55 mm

 1.16 kg

EAN 7612375903140

RANGE A

D-6

- HSS-G, 90
- Three teeth, 90
- Cylindrical shank
- With 3-sided cutting edges
- Ground
- ϕ 6.3 / 8.3 / 10.4 / 12.4 / 16.5 / 20.5 mm

6-PCS.

Price catalogue EX

£ 47

Dimensions

 145 x 100 x 40 mm

 0.36 kg

EAN 7612375903164

RANGE A

D-3

- ϕ 4 – 12 / 4 – 20 / 6 – 30 mm,
- at intervals of 2.0 mm
- With 3-sided cutting edges
- HSS with high quality TiN

3-PCS.

Price catalogue EX

£ 61

Dimensions

 145 x 100 x 40 mm

 0.36 kg


EAN 7612375903171

RANGE A

HAND TOOLS

REPLACEMENT PARTS IN GENERAL

Bits, Torx, no drilling, colour coded



- Chrome vanadium steel
- Chrome plated
- 10 pcs. in blister pack
- 1/4 inch hex drive

XB-21900339	1000-028-297	T6	Length : 25 mm
XB-21900340	1000-028-298	T7	
XB-21900341	1000-028-299	T8	
XB-21900342	1000-028-300	T9	
XB-21900343	1000-028-301	T10	
XB-21900344	1000-028-302	T15	
XB-21900345	1000-028-303	T20	
XB-21900346	1000-028-304	T25	
XB-21900347	1000-028-305	T27	
XB-21900348	1000-028-306	T30	
XB-21900349	1000-028-307	T40	

Bits, Torx, without hole, colour coded



- Chrome vanadium steel
- Chrome plated
- 10 pcs. in blister pack
- 1/4 inch hex drive

XB-21900364	1000-028-322	T6	Length : 75 mm
XB-21900365	1000-028-323	T7	
XB-21900366	1000-028-324	T8	
XB-21900367	1000-028-325	T9	
XB-21900368	1000-028-326	T10	
XB-21900369	1000-028-327	T15	
XB-21900370	1000-028-328	T20	
XB-21900371	1000-028-329	T25	
XB-21900372	1000-028-330	T27	
XB-21900373	1000-028-331	T30	
XB-21900374	1000-028-332	T40	

Bits, Torx, with hole, colour coded



- Chrome vanadium steel
- Chrome plated
- 10 pcs. in blister pack
- 1/4 inch hex drive

XB-21900357	1000-028-315	T10	Length : 25 mm
XB-21900358	1000-028-316	T15	
XB-21900359	1000-028-317	T20	
XB-21900360	1000-028-318	T25	
XB-21900361	1000-028-319	T27	
XB-21900362	1000-028-320	T30	
XB-21900363	1000-028-321	T40	

Reversible ratchet



- Forged from chrome vanadium steel
- With socket lock
- Right/left hand switch
- 2-component handle
- 72 teeth


XB-21900109	1000-027-857	Length : 160 mm
-------------	--------------	-----------------

Magnetic bit holder, 1/4 inch hex



- With ejection mechanism and automatic locking

XB-21900396	1000-028-354	Length : 67 mm
-------------	--------------	----------------



- Automatic locking

XB-21900397	1000-028-355	Length : 60 mm
-------------	--------------	----------------



- Automatic locking, very slim design

XB-21900398	1000-028-356	Length : 60 mm
-------------	--------------	----------------

Swivel joint



- Chrome vanadium steel
- 4-sided M / 4-sided F

XB-21900115	1000-027-862	Length : 43 mm
-------------	--------------	----------------

Straight nose pliers

- Chrome vanadium steel
- Ergonomic 2-component handles
- Polished head


XB-21900243	1000-027-979	Length : 205 mm
-------------	--------------	-----------------

Curved nose pliers

- Chrome vanadium steel
- Ergonomic 2-component handles
- Polished head

XB-21900244	1000-027-980	Length : 205 mm
-------------	--------------	-----------------

Extension, flexible



- Chrome vanadium steel
- 4-sided M / 4-sided F

XB-21900111	1000-027-859	Length : 143 mm
-------------	--------------	-----------------

AIR POWERED TOOLS

JAT-801-EU

- Heavy duty, heat treated pistons and cylinders for improved efficiency and durability
- Ball lock retainer allows for quick tool changes
- Includes one set of needles
- Quiet for low noise operation
- Designed for the most demanding jobs; extremely long life

Price catalogue EX

£ 321



JAT-121-EU

- Pneumatic impact spanner
- Composite housing improves balance and reduces weight
- Dual hammer impact mechanism improves durability with balanced force delivery
- Latest generation impact spanners
- Designed for the most demanding jobs; extremely long life
- Composite housing

Price catalogue EX

£ 320



JAT-323-EU

- Knock-down pawl technology results in less kickback and greater torque with less torque force
- Patented, sealed head prevents dirt from entering the ratchet mechanism, increasing its life
- Ergonomically designed vibration absorbing handle
- Designed for the most demanding jobs; extremely long life
- Composite body
- 600 min-1 idle speed

Price catalogue EX

£ 359



JAT-901-EU

- Medium length cylinder with round rod
- Gun handle with variable speed trigger for precise impact control during variable starts and stops
- Designed for the most demanding jobs; extremely long service life

Price catalogue EX

£ 126



JAT-611-EU

- Lightweight aluminium construction
- Ergonomically shaped shell handles for a good grip without fatigue
- Easy to reach, top mounted front/back switch
- Variable speed trigger for precise speed control
- Heavy duty ball bearing for durability
- With 13 mm keyed chuck

Price catalogue EX

£ 257



	JAT-801-EU		JAT-121-EU	JAT-323-EU	JAT-901-EU	JAT-611-EU
Stroke length (mm)	28.6	Square drive (inches)	1/2"	1/2"	-	-
Number of needles	19	Max. screw size	M22	-	-	-
Needle size (mm)	3	Type of blocking	Ring	-	-	-
Shots per minute	4000	Reversible	Yes	-	-	-
Average air consumption (l/min)	85	Max. torque (Nm)	1'017	-	-	-
Air intake	1/4 " NPT	Operating torque (Nm)	68 - 746	34 - 95	-	-
Internal diameter of the air hose	3/8"	Idle speed (rpm)	8'500	6'000	-	8'000
Required air pressure (bar)	6.2	Shots per minute	1'200	-	3'200	-
Vibration value (m/s²)	14.5	Air consumption (lt. / min)	190	113	85	113
Noise level (dB)	101	Air intake (NPT / inches)	1/4"	-	1/4"	-
Total length (mm)	415	Air hose (ID / inches)	3/8"	-	3/8"	3/8"
Case material (mm)	Acier	Vibration value (m / s²)	10.6	-	8.4	-
		Noise level (dB(A))	107	-	108	91
Weight (kg)	2.73	Total length (mm)	183	291	171.5	184
		Weight (kg)	1.85	1.8	1.91	1.68
EAN	7612375 516197	EAN	7612375 516142	7612375 516593	7612375 516180	7612375 516166
RANGE	P	RANGE	P	P	P	P

WORKSHOP LIGHTS




X-828

- Essential kit for workshop, service and maintenance
- Robust and durable construction for low weight
- Flexible use thanks to strong magnets and rotating fixing hooks
- Particularly high light output thanks to COB LEDs
- Rechargeable via USB cable



Price catalogue EX

£ 56

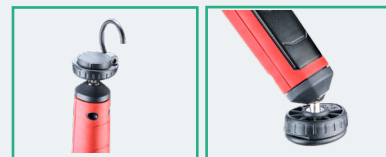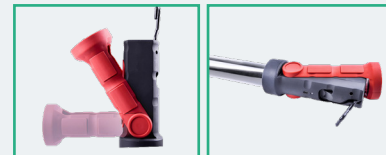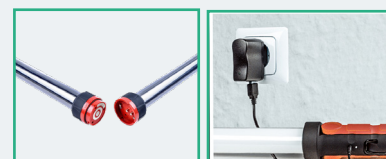

X-829

- COB LED workshop lamp
- For particularly tight spaces
- Large-area light coverage
- Impact-resistant rubber housing, two-component (IK07)



Price catalogue EX

£ 43

VOLTMETER

X-830

- AC / DC voltage measurement, 12 – 690 V
- LCD for voltage display
- LED display for continuity test



Price catalogue EX

£ 62

LED SPOTLIGHT

LED-50W

- Long life, up to more than 50,000 hours.
- High energy efficiency (AAA++) for a wide light beam
- Optimum IP65 protection: Dust and splash-proof to protect the LED chip



Price catalogue EX

£ 199

MODEL	X-828	X-829	X-830		LED-50W
Battery type	Li-Ion	Li-Ion	-	Voltage (V)	230
Battery voltage (V)	-	3.7	-	Power (W)	50
Battery capacity	2 Ah	2.6 Ah	-	Diffusion angle	120°
Lumen	1200	0-560	-	Colour temperature	3500 °c
Lighting time	-	2-15 h	-	Lumen	6000
Charging time	-	4 h	-	Protection class	IP65
Protection class	-	IP 54	IP65	Lighting range	25-40
Dimensions (mm)	590 x 75 x 140	385 x 34	275 x 75 x 35	Electric cable	5 m
Weight (kg)	1.021	0.23	0.22	Weight	4.2
EAN	7612375528107	7612375684131	761237553469	EAN	7612375527179
RANGE	J	J	J	RANGE	J

COMPRESSORS

494

- With 2 handles for easy movement
- High stability with 2 front feet and oversized wheels
- Direct drive motor
- With pressure adjustment, quick coupling, motor protection switch

230V

Price catalogue EX

£ 220



496

- With 2 handles for easy movement
- High stability with 2 front feet and oversized pneumatic wheels
- With thermal protection switch
- Direct drive motor
- With pressure switch, pressure adjustment, tank and air flow gauge

230V

Price catalogue EX

£ 345



498

- With 2 handles for easy movement
- High stability with 2 front feet and oversized pneumatic wheels
- With thermal protection switch
- Direct drive motor
- With pressure switch, pressure regulation water separator and quick couplings

230V

Price catalogue EX

£ 598



	494	496	498
Motor (V / kW)	230 / 1.1	230 / 1.5	230 / 2.2
Tank capacity (lt.)	24	50	50
Air intake (lt. / min)	230	250	290
Air flow at 7 bar (lt. / min)	110	130	165
Max. pressure (bar)	8	8	10
Cylinder	1	1	2
Speed (min ⁻¹)	2'850	2'850	1'450
Circuit breaker fuse (A)	10	10	10
Electric cable (m)	1.5	1.5	1.5
Sound pressure level LpA (dB)	95	95	94
Dimensions (mm)	650 x 340 x 600	790 x 490 x 670	790 x 490 x 740
Weight (kg)	25	32	48
EAN	8020119031216	8020119031230	7612375301342
DEEE	0.63	0.88	1.2
RANGE	P	P	P

COMPRESSORS

C-100-330M

- Copper cooling coils
- Protective circuit breaker
- Set of wheels
- With pressure switch, pressure control, water separator and quick couplings

Price catalogue EX

£ 623



C-200-330M

- Copper cooling coils
- Protective circuit breaker
- Set of wheels
- With pressure switch, pressure adjustment, water separator and quick couplings

Price catalogue EX

£ 827



C-100-450A

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

£ 1193



C-200-540B

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, forced-air cooler, tank and air flow manometer, 2 quick couplings

Price catalogue EX

£ 1366



CL-10-235A

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

£ 532



CL-20-460

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

£ 1382



C-50-420

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

£ 1231



CL-50-320

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

£ 1264



	C-100-330M	C-200-330M	C-100-450A	C-200-540B	CL-10-235A	CL-20-460	C-50-420	CL-50-320
Motor (V / kW)	230 / 2.25	230 / 2.25	400 / 2.25	400 / 3.0	230 / 1.5	230 / 1.8	230 / 2.25	230 / 1.5
Tank capacity (lt.)	100	200	100	200	10	20	50	50
Air intake (lt. / min)	-	-	450	540	235	460	420	320
Air flow at 7 bar (lt. / min)	330	330	310	410	130	310	290	190
Max. pressure (bar)	10	10	10	10	8	11	11	10
Cylinder	1	1	2	2	1	2	2	3
Speed (min ⁻¹)	1'500	1'500	1'100	1'200	2800	2850	1200	1350
Circuit breaker fuse (A)	-	-	10	16	10A	10A	10A	10A
Electric cable (m)	-	-	1.5	1.5	3	2.75	3	3
Sound pressure level LpA (dB)	74	74	72	74	89	74	72	69
Dimensions (mm)	1'100 x 400 x 830	1'460 x 640 x 1'140	880 x 120 x 460	1'510 x 520 x 970	360 x 350 x 650	450 x 410 x 800	900 x 470 x 840	810 x 410 x 660
Weight (kg)	64	102	72	98	18	31	54	49
EAN	7612375301359	7612375300956	7612375301342	7612375301359	7612375300239	7612375304015	7612375300772	7612375301380
DEEE	1.60	2.55	1.8	2.45	0.45	0.77	1.35	1.23
RANGE	P	P	P	P	P	P	P	P

SPIRAL HOSE

- Pipe size (mm): 6.5 × 10
- Material: polyurethane
- Max. working pressure (bar): 10
- Burst pressure (bar): 20.7
- Operating temperature (°C): - 20 / +60
- Incl. quick coupling and coupling
- for compressed air system ARO



Ref.	EAN	Range	Description	Price EX
98111-PU	7612375300956	P	1/4 inch, 8 bar, compressed air accessory set, 5-pcs.	£ 25.00
98112-PU	7612375300963	P	SPIRAL FLEX 6.5x10mm x15m	£ 35.00

HOSE REEL

- Air gun
- Air hose, 2.5 m
- Air paint gun
- Pneumatic spray gun



Ref.	EAN	Range	Description	Price EX
98341B	7612375300970	P	Compressed air hose reel 8 x 12 mm 15 ml	£ 119.00
98343B	7612375303094	P	Compressed air hose reel 9.5 x 13.5 mm 20 ml	£ 183.00
98320A	7612375005813	P	Compressed air hose reel 10 x 14 mm 16 ml	£ 277.00
98339B	7612375523614	P	Compressed air hose reel 8 x 12 mm 10 ml	£ 118.00
98300C	7612375300611	P	Compressed air hose reel 8 x 12 mm 9 ml	£ 176.00
98340B	7612375303971	P	Compressed air hose reel 9.5 x 13.5 mm 30 ml	£ 193.00

TOOLAIR-KIT


- Air hose, 2.5 m
- Air gun
- Air paint gun
- Pneumatic spray gun



Ref.	EAN	Range	Description	Price EX
2180	7612375300857	P	1/4", 8 bar, compressed air accessory set, 5-pcs.	£ 57

WILTON CLAMPS

- Black oxide spindle resists wear while preventing rust
- Forged arm provides minimal bending under heavy working loads
- Heavy duty F-Series clamps/presses have 12000N clamping force, replaceable heavy duty pad
- 12000N clamping force, replaceable heavy duty pad and replaceable parts

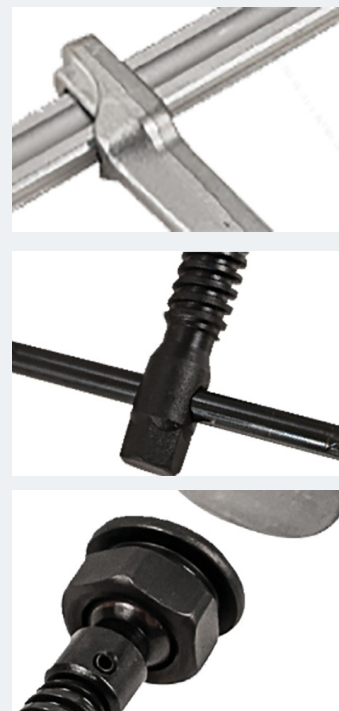

Ref.	Name	Opening (mm)	Extension	Rail mm	Clamping force (N)	Weight	Qty	PRICE	Range
86640	GSM 20	200	140	30 x 13	12'000	2.7	1	£ 103.00	A
86650	GSM 30	300	140	30 x 13	12'000	3	1	£ 118.00	A
86660	GSM 40	400	120	30 x 13	12'000	3	1	£ 128.00	A
86670	GSM 50	500	140	30 x 13	12'000	3.6	1	£ 148.00	A
86680	GSM 60	600	120	30 x 13	12'000	4	1	£ 167.00	A



PUMPS FOR CLEAN WATER

- For liquids with temperatures up to +40 °C
- Housing and impeller made of technopolymer
- Stainless steel pump shaft
- Double sealing mechanism in ceramic – graphite and oil bath
- Permanent motor cooling by means of water discharge

SPEED-30M



APPLICATIONS



Clean water



Ponds



Flooded rooms



Pits / ponds with particles solids



Pools (take into account the pH)



Regulation level by switch float switch

Price catalogue EX

£ 197

230V

SPEED-MOP-30



APPLICATIONS



Clean water



Ponds



Flooded rooms



Pits / ponds with particles solids



Pools (take into account the pH)



Flat roofs and small quantities water residual water

Price catalogue EX

£ 223

230V

F1-50M



APPLICATIONS



Clean water



Ponds



Flooded rooms



Pits / ponds with particles solids



Pools (take into account the pH)



Regulation level by switch float switch

Price catalogue EX

£ 283

230V

	SPEED-30M	SPEED-MOP-30	F1-50M
Motor (V / kW)	230 / 0.25	230 / 0.25	230 / 0.37
Max. flow rate (lt. / h)	9'600	7'200	13'200
Max. delivery height (m)	7	7	9
Max. working depth (m)	3	3	10
Minimum drying level (mm)	14	2	14
Maximum particle size (mm)	–	–	–
Discharge port	1" M / 25 mm	1" M / 25 mm	1 1 / 4" –F
Insulation class	F	F	F
Protection class	IP68	IP68	IP68
Speed (min ⁻¹)	2'900	2'900	2'900
Electric cable (m)	10	10	10
Use at pH value	6 – 9	6 – 9	6 – 9
Dimensions (mm)	152 x 257	152 x 229	147 x 147 x 255
Weight (kg)	4.5	4.3	5
EAN	7612375302868	7612375302882	7612375302912
DEEE	0.1	0.1	0.14
RANGE	I	I	I

PUMPS FOR DIRTY WATER

- For liquids in the temperature range up to +40 °C
- Stainless steel housing and propeller
- Permanent motor cooling by means of water flow
- With thermal overload protection
- Double ceramic seal mechanism – graphite and oil bath
- Level control by float

SPEED-VORTEX



APPLICATIONS



Clean water



Ponds



Flooded rooms



Pits / ponds with particles solids



Pools (take into account the pH)



Regulation level by switch float switch

Price catalogue EX

£ 242

230V

F1-50M-VORTEX



APPLICATIONS



Clean water



Ponds



Pits / ponds with particles solids



Pools (take into account the pH)



Flat roofs and small quantities water residual water

Price catalogue EX

£ 316

230V

COBRA-90M



APPLICATIONS



Clean water



Ponds



Pits / ponds with particles solids



Pools (take into account the pH)



Flat roofs and small quantities water residual water

Price catalogue EX

£ 474

230V

	SPEED-VORTEX	F1-50M-VORTEX	COBRA-90M
Motor (V / kW)	230 / 0.37	230 / 0.37	230 / 0.6
Max. flow rate (lt. / h)	10'800	10'800	24'000
Max. delivery height (m)	7	7	11
Max. working depth (m)	3	10	5
Minimum drying level (mm)	25	25	40
Maximum particle size (mm)	20	20	35
Discharge port	1 1 / 4" / 35 mm	1 1 / 4" F	1 1 / 2" F
Insulation class	F	F	F
Protection class	IP68	IP68	IP68
Speed (min-¹)	2'900	2'900	2'900
Electric cable (m)	10	20	10
Use at pH value	6 – 9	6 – 9	6 – 8
Dimensions (mm)	152 x 288	147 x 290	224 x 385
Weight (kg)	5.1	6.1	11.9
EAN	7612375302905	7612375303063	7612375302974
DEEE	0.13	0.15	0.3
RANGE	I	I	I

PUMP KITS

S.O.S.-KIT

- Practical and indispensable for quickly and efficiently evacuating water from flooded cellars or garages
- SPEED-MOP-50M Pump with pre-mounted coupling, 10 metre power cable and external float switch and external float switch
- Fabric hose with quick coupling, 15 m
- Filter box to prevent large deposits from interfering with the drainage

Price catalogue EX

£ 503

230V



PRESSURE / SURFACE PUMP

24CY-JET-15LM

- For clean, non-aggressive water
- For watering the garden, plants, lawns etc,
- as well as for cleaning purposes
- For liquids in the temperature range up to +40 °C, briefly up to 60 °C
- Stainless steel pump housing, technopolymer impeller
- Pump shaft in stainless steel
- Start / Stop switch
- With thermal overload protection

230V

Price catalogue EX

£ 442



	SPEED-MOP-50M		24CY-JET-15LM
Motor (V / kW)	230 / 0.37	Max. pressure (bar)	3.8
Max. flow rate (lt. / h)	9'600	Motor (V / kW)	230 / 1.1
Max. delivery height (m)	9	Max. flow rate (lt. / h)	4'800
Max. working depth (m)	3 (m)	Max. delivery height (m)	35
Minimum drying level (mm)	2	Max. suction height (m)	9
Discharge port	Camlock	Discharge port	1"
Insulation class	IF	Suction port	1 1 / 4"
Protection class	IP68	Insulation class	F
Speed (min ⁻¹)	2'900	Protection class	IP44
Electric cable (m)	10	Speed (min ⁻¹)	2'900
Use at pH value	6 – 9	Electric cable (m)	1.5
Dimensions (mm)	400 x 300 x 320	Use at pH value	6 – 8
Weight (kg)	9.3	Dimensions (mm)	540 x 230 x 539
EAN	7612375528329	Weight (kg)	17.3
DEEE	0.24	EAN	7612375303063
RANGE	I	DEEE	0.44
		RANGE	I

HEATERS

DHP-80000T

- Oil heater 230V/80kW with chimney, air circulation 3900 m3/h
- Fuel : Diesel, Fuel oil with anti-freeze additive
- With separate exhaust outlet (air outlet without exhaust gas)
- Flame control by photocell
- Safety thermostat in case of overheating
- Hoses (up to 12m) can be used to distribute the air in the rooms

230V

Price catalogue EX

£3 167



DHP-48000T

- Oil heater 230V/48kW, with chimney, air circulation 1900 m3/h
- Fuel : Diesel, Fuel oil with anti-freeze additive
- With separate exhaust outlet (air outlet without exhaust gas)
- Flame control by photocell
- Safety thermostat in case of overheating
- Hoses (up to 12m) can be used to distribute the air in the rooms

230V

Price catalogue EX

£2 642



H-2B

- Electric heater 230V, 2kW
- Automatic temperature control
- Overload protection
- Sturdy handle and stand

Price catalogue EX

£ 99

230V



H-5B

- Electric heater 400V, 5kW
- Automatic temperature control
- Overload protection
- Sturdy handle and stand

Price catalogue EX

£ 177

400V



H-9B

- Electric heater 400V, 9kW
- Automatic temperature control
- Overload protection
- Sturdy handle and stand

Price catalogue EX

£ 242

400V



H-15B

- Electric heater 400V, 15kW, cable-free
- Automatic temperature control
- Overload protection
- Robust handle and stand

Price catalogue EX

£ 425

400V



	DHP-80000T	DHP-48000T	H-2B	H-5B	H-9B	H-15B
Motor (V / kW)	230 / 0.75	230 / 0.3	230	400	400	400
Heat output (kW)	80.6	48.5	2	5	9	15
Air circulation (m3/h)	3900	1900	150	500	800	1350
Consumption (kg/h)	6.8	4.9	-	-	-	-
Current	-	-	8.7A	7.2A	13A	31A
Tank capacity (L)	120	70	-	-	-	-
Electric cable (m)	1.8	1.8	2	2	2	2
Type of power plug	TE12	TE12	TE12	CEE16	CEE16	CEE32
Dimensions (mm)	1600 x 750 x 1200	1380 x 580 x 1040	300 x 240 x 360	360 x 300 x 460	350 x 370 x 500	460 x 410 x 590
Weight (kg)	152	112	4.3	5.7	9.6	14.9
EAN	7612375519570	7612375519563	7612375304329	7612375304336	7612375304343	7612375304350
DEEE	P	P	P	P	P	P

ULTRA RECORD

- Ultra Record hand saw blades are suitable for precision work
- Super HSS molybdenum high speed steel
- Outstanding cutting performance
- Total Temple

SPECIAL LAUNCH PRICE

Price catalogue EX

£ 206

**Box of 100
Discount to be
deducted**



300 x 13 x 0.65	UR 8D-2	UR 8D-10	UR 8D-100
12 x 1/2 x 0.025"	UR 10D-2	UR 10D-10	UR 10D-100
	UR 12D-2	UR 12D-10	UR 12D-100

ULTRA BI HARD

- Ultra BI-HARD hand saw blades are suitable for safe working
- HSS high speed steel 8% bimetal
- Alternating teeth
- flexible, very hard, unbreakable blade

SPECIAL LAUNCH PRICE

Price catalogue EX

£ 132

**Box of 100
Discount to be
deducted**



300 x 13 x 0.65	UBH 8D-2	UBH 8D-10	UBH 8D-100
12 x 1/2 x 0.025"	UBH 10D-2	UBH 10D-10	UBH 10D-100
	UBH 12D-2	UBH 12D-10	UBH 12D-100

ULTRA COBALT EDGE SCWL

- **Application:** Drilling of all common materials and metals in boiler making, mechanical engineering, maintenance, carpentry, sanitary and electrical installations.
- **Features:** HSS Bi-metal body and heavy duty hard metal head. Thick plate machined base, positive cutting teeth with variable pitch of 4/6 T reducing vibrations, depth of cut: 34-38 mm. Colour: White.

SPECIAL LAUNCH PRICE

**Price example
Discount to be deducted**

DIAMETER	PRICE WITHOUT DISCOUNT EX
ø 24	£ 5.48
ø 37	£ 6.10
ø 52	£ 7.80



The JET logo consists of the letters 'JET' in a bold, black, sans-serif font. Above the letters is a horizontal red bar.The TOOL FRANCE logo features the words 'TOOL' and 'FRANCE' in a bold, sans-serif font. 'TOOL' is black, and 'FRANCE' is red.

2022



PREMIUMS

WWW.TOOLFRANCE.

PROMAC[®]

Valid from 01/01/2022
to 31/07/2022

Price EX. **Excluding transport costs
and container surcharge**

YOUR DEALER

The TOOL FRANCE logo, with 'TOOL' in black and 'FRANCE' in red, set against a white background.

TOOL France SAS • 9 Rue des Pyrénées • 91090 LISSES • France
Tél. +33 (0)1 69 11 37 37 • www.promac.fr