

TOOLFRANCE

PREMIUMS

www.toolfrance.com

Valid from 01/01/2022 au 31/07/2022

Prices exclude VAT. Excluding transport costs

For your information, an e-commerce site with our spare parts will be launched in February 2022:
www.pieces-detachees-toolfrance.com



GH-2060ZH-T-QC



V25PGM(TE)



MOD-370SADSMS

2022

PROMAC®

BENCHTOP DRILLS

211Z

- Machine supplied with quick-release chuck
- quick release chuck 1 – 16 mm
- One 75 mm vice
- Servo chuck guard
- Emergency stop on the front
- Belt driven speed change
- Drilling table with 2 parallel
- 12 mm parallel slots

230V




Catalogue price excl.

£ 317

212

- Machine delivered with self-tightening chuck
- Servo spindle protector
- Emergency stop on front panel
- Speed change by belt
- Switch with coil
- anti restart

230V

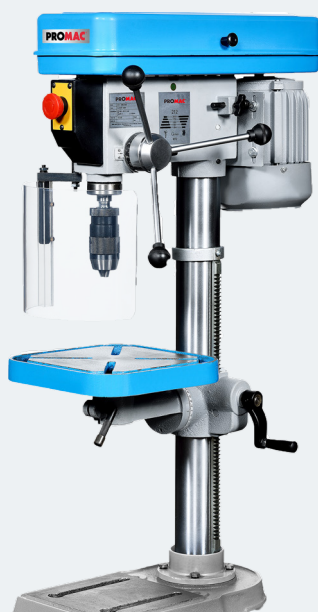

Catalogue price excl.

£ 388

212VLL

NEW

- Mechanical variable speed drive
- Digital speed display
- LED illumination of the drilling area
- Two lasers for centring
- Servo chuck protection
- CM2/B16
- Speed change by belt
- Tilting table 45°L/45°R



230V

Catalogue price excl.

£ 424

370ELB / 371ELB

- Servo chuck protection
- Supplied with 16 mm self-tightening chuck
- Speed change by belt
- LED lighting of the drilling area for Swiss model
- No lighting for French model
- Tilting table 45°L / 45°R

230V
370ELB

400V
371ELB



Catalogue price excl.

£ 874

	211Z	212	212VLL	370ELB 371ELB
Motor (V / kW)	230 / 0.25	230/0.37	230/0.55	230 400/0.75
Morse Taper	B16	CM2	CM2	CM2
Throat (mm)	130	170	155	180
Drilling Capacity max. (mm)	16	16	16	16
Spindle Travel (mm)	60	80	80	85
Tapping	-	-	-	-
Number of Speeds	5	5	Variable	12
Speed Range (min-1)	600-2'600	490-2'510	450-2'500	290-2'300
Slot Width (mm)	12	12	12	12
Dimensions (mm)	420 x 240 x 720	560 x 320 x 970	500 x 235 x 935	630 x 300 x 1'040
Weight (kg)	32	45	45	74
Delivered with	13mm Self-tightening chuck 75mm Vice	16mm Self-tightening chuck		16mm Self-tightening chuck
EAN	7612375601275	7612375605426	7612375694178	7612375504460 / 7612375504477
DEEE	0.8	1.125	1.125	1.85
RANGE	P	P	P	P

BENCHTOP DRILLS

JD-3285M/T

- LED lighting of the drilling area
- Two lasers for centring
- Servo chuck protection
- Speed change by belt
- Tilting table 45°L/45°R

230V
JD3285-M

400V
JD3285-T



Catalogue price excl.


£ 888

372E/373E

- Servo-controlled chuck guard /
- Emergency stop on front panel
- 12 speeds
- Head height adjustable

230V
372E

400V
373E

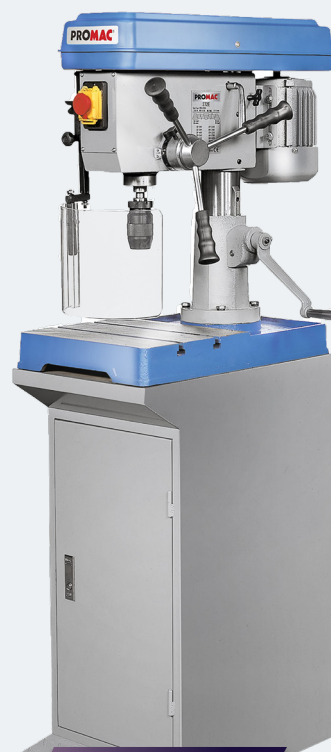


Catalogue price excl.

£1150

BX-825VT

- Variable speed drive and digital speed display
- Servo chuck guard /
- Emergency stop on front panel
- Tapping by reversing the direction of rotation
- Left / right-hand running switch

400V

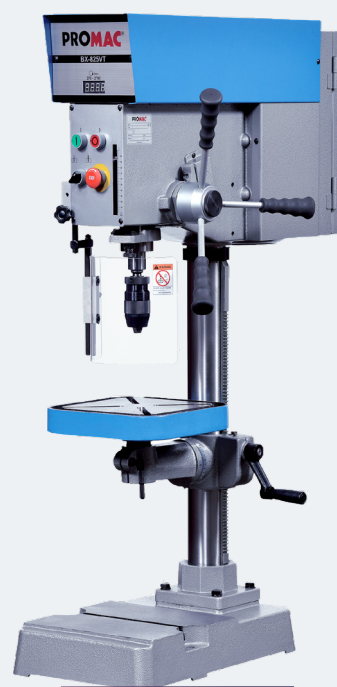

Catalogue price excl.

£2784

	JD-3285M/T	372E 373E	BX-825VT
Motor (V / kW)	230 / 0.75 ou 400 / 0.75	230 400 / 0.75	400 / 0.55
Morse Taper	CM3	CM2	CM3
Throat (mm)	215	180	180
Drilling Capacity max. (mm)	32	16	25
Spindle Travel (mm)	85	85	105
Tapping	-	-	M12
Number of Speed	16	12	Variateur
Speed Range (min-1)	180 - 3'000	290-2'300	270 - 2'700
Slot Width (mm)	12	12	12
Dimensions (mm)	340 x 660 x 1'050	630 x 350 x 1840	850 x 350 x 1'190
Weight (kg)	60	100	125
Delivered with	1-16mm Self-tightening chuck	1-16mm Self-tightening chuck Morse taper CM2-B18 Standard base	Self-tightening chuck 1-16 mm Morse taper CM3
EAN	7612375691948 / 7612375691955	7612375528558 / 7612375521597	7612375308717
DEEE	1.5	2.5	3.13
RANGE	P	P	R

BENCHTOP DRILLS

378VTE

- Benchtop drilling machine
- Variable speed drive electronic
- Digital speed display
- Tapping device (up to M 10)

230V



Catalogue price excl.

£2334

378CLB

- Two speed motor
- 16mm self-tightening chuck and emergency stop button
- Switch with anti-restart coil
- Switch secured belt cover and servo chuck guard
- Cross-slotted table, adjustable by rack and pinion
- Integrated lighting

400V



Catalogue price excl.

£1434

378VB

- Variable speed drive
- and digital speed display
- Servo chuck guard /
- Emergency stop on front panel

230V



Catalogue price excl.

£1688

JDT-2512V

- Benchtop drilling machine
- Variable speed drive
- electronic
- Digital speed
- speed display
- Tapping device
- tapping device
- (up to M 12)

400V



Catalogue price excl.

£2227

	378VTE	378CLB	378VB	JDT-2512V
Motor (V / kW)	230 / 0.75	400 / 0.55	230 / 1.2	400 / 0.75
Morse Taper	CM2	CM2	CM2	CM2
Throat (mm)	180	165	180	205
Drilling Capacity max. (ø-mm)	20	16	20	23
Spindle Travel (mm)	90	85	90	100
Tapping	M3-M10	-	-	M12
Number of Speeds	Variable	2	Variateur	variable
Speed Range (min ⁻¹)	150 - 2'500	145 - 1'165 / 290 - 2'330	150 - 1'000 / 350 - 2'500	100 - 2'100
Slot Width (mm)	12	12	12	14
Dimensions (mm)	1'280 x 810 x 360	1'075 x 600 x 290	630 x 350 x 1'090	1'055 x 610 x 380
Weight (kg)	103	71	88	105
Delivered with	Tool holder CM2 Keyless chuck from 1 to 16 mm	-	Self-tightening chuck 1-16mm	CM2 Tool holder
EAN	7612375534627	7612375517071	7612375607673	7612375631814
DEEE	2.58	2.28	2.2	2.62
RANGE	P	P	P	P

DRILL PRESS

213A

- Servo spindle guard
- Speed change by belt
- Tilting table 0 – 45°

230V



Catalogue price excl.

£ 695

214AB T/M

- Belt-driven speed change
- Servo-controlled spindle guard
- Tilting table 0 – 45°
- Large work table 428 x 475 mm – Perçage acier 26 mm

Delivered Assem-



230V
214AB-M


400V
214AB-T

Catalogue price excl.

£1217

JD-32120

- Column drilling machine MONO
- 230 V / 1.1 kW
- Spindle stroke 120 mm
- Max. drilling steel 32 (at 145 rpm)
- Tilting table 45° L&R

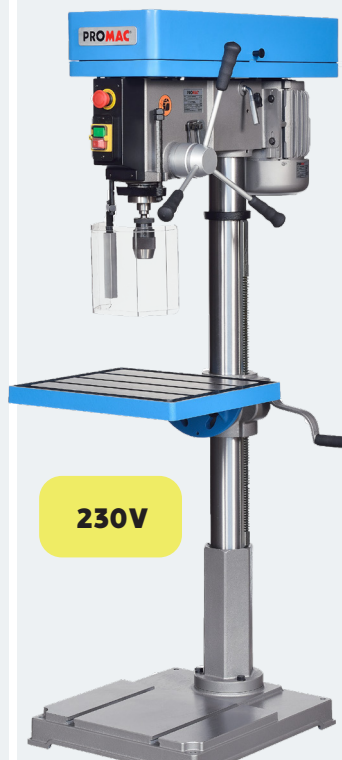

230V

Catalogue price excl.

£2063

V25(TE) – SERRMAC

- Supplied with 350 x 250 mm swivel vice table
- Also available with electronic drive (V25E)



400V

Catalogue price excl.

£3174

	213A	214AB T/M	JD-32120	V25
Motor (V / kW)	230 / 0.37	400 / 0.75 ou 230 / 0.75	230 / 1.1	400 / 0.75
Morse Taper	CM2 / B16	CM3	CM3	CM3
Throat (mm)	180	280	280	-
Drill Capacity max. R50 (ø-mm)	16	26	32	25
Spindle Travel (mm)	85	115	120	100
Tapping	-	-	-	-
Number of Speeds	12	12	12	12
Speed Range (min-1)	260-2'900	150 – 2'840	145 – 2'530	164 – 2'460
Slot Width (mm)	T12	T12	16	T12
Dimensions (mm)	600 x 340 x 1'570	840 x 460 x 1'750	890 x 480 x 1'700	1650 x 500 x 850
Weight (kg)	58	164	145	185
Delivered with	Self-tightening chuck 1-13mm	Self-tightening chuck 1-16mm Morse taper CM3	CM3 Tool holder	Tables: Mechanics' table (TM), Swivel table (TP)/vise (TPE), Cross table (TC)
EAN	7612375521573	7612375504453	7612375537284	Contact us
DEEE	1.45	4.1	3.62	4.6
RANGE	P	P	P	R

DRILL PRESS

JDT-3216V

- Column drilling machine
- Variable speed drive
- electronic
- Digital speed
- speed display
- Tapping device

400V



Catalogue price excl.

£3005

930E

- Table étau réversible (mors 120 mm / serrage 75 mm)
- Protecteur mandrin asservi / moteur 2 vitesses
- Système de lubrification intégré au socle
- Changement des vitesses par courroie interrupteur
- Avec bobine anti redémarrage



Catalogue price excl.

£2635

400V

DP-1500VS

- Variable speed drive and digital speed display
- Automatic spindle lowering
- Integrated lubricant
- Tapping function by reversing the direction of rotation with selector switch

230V



Catalogue price excl.

£4597

	JDT-3216V	930E	DP-1500VS
Motor (V / kW)	400 / 1.1	400 / 0.75	230 / 1.1
Morse Taper	CM3	CM3	CM4
Throat (mm)	245	210	225
Drilling Capacity max. (ø-mm)	32	30	38
Spindle Travel (mm)	135	125	150
Tapping	M16	-	M24
Number of Speeds	Variable	18	2
Speed Range (min-1)	100 – 2'100	115 – 2'470	245 – 2'000
Slot Width (mm)	T14	T14	-
Dimensions (mm)	1'590 x 710 x 610	750 x 450 x 1'745	1524 x 1117.6 x 2235
Weight (kg)	230	216	450
Delivered with	CM3 Tool holder	Self-tightening chuck 1-16 mm Morse taper CM3	-
EAN	7612375631821	7612375608076	5060473191754
DEEE	5.75	5.4	11.25
RANGE	P	P	U

DRILL PRESS

BX-834V

- Variable speed drive and digital speed display
- Tapping function by reversal of direction of rotation
- with selector switch
- 180° tilting table
- Vise with 120 mm opening
- Integrated lubrication
- Spindle with M12 bottom

400V



Catalogue price excl.

£4325

BX-840VB

- Variable speed drive and digital speed display
- Tapping function by reversal of direction of rotation
- with selector switch
- Integrated lubrication
- Morse taper CM4

400V



Catalogue price excl.

£5390

BX-840VADT

- Variable speed drive and digital speed display
- Two speed ranges per mechanical gearbox
- Tapping function by reversing the direction of rotation with selection switch (depth stop / switch)
- Automatic spindle lowering
- Integrated lubrication system

400V



Catalogue price excl.

£6983

	BX-834V	BX-840VB	BX-840VADT
Motor (V / kW)	400 / 1.5	400 / 2.2	400 / 1.5
Morse Taper	CM3	CM4	CM4
Throat (mm)	230	300	265
Drilling Capacity max. (ø-mm)	32	40	40
Spindle Travel (mm)	140	150	150
Tapping	M4-M16	M4-M20	M4-M20
Number of Speed	Variable	Variable	Variable
Speed Range (min-1)	80 – 2'500	70 – 2'000	65 – 2'000
Slot Width (mm)	T14	T14	T16
Dimensions (mm)	880 x 660 x 1'810	790 x 540 x 1'870	915 x 560 x 1'970
Weight (kg)	295	330	385
Delivered with	Servo chuck guard Table / Vise 120 mm opening Integrated lubrication Self-tightening chuck 1-16 mm Morse taper CM3	Self-tightening chuck 1-16 mm Morse taper CM4 Integrated lubrication	Self-tightening chuck 1-16 mm Morse taper CM4 Integrated lubrication
EAN	7612375607864	7612375608656	7612375607871
DEEE	7.375	8.25	9.625
RANGE	R	R	R

MAGNETIC BASE DRILL

MDA-35S

- 9'800 N magnetic force
- magnetic force on minimum thickness of 6 mm
- Integrated lubrication

230V



Catalogue price excl.

£ 479



MDA-50S

NEW

- 16'000 N magnetic force
- magnetic force on minimum thickness of 6 mm
- Integrated lubrication

230V



Catalogue price excl.

£ 939



	MDA-35S	MDA-50S
Motor (V / kW)	230 / 0,9	230 / 1.2
Gear - RPM under load (rpm)	400	235 / 425
Socket	19 mm Weldon	19.05 mm (3/4") WELDON
Adhesive force magn: Twoool force (10 mm steel) (N)	9'800	16'000
Max. ø in steel (mm)	Bits: 12-35, 1-13 mm WELDON DIN 338 and 6-13 mm DIN 1897	Cutters: 12-50, drills 1-20 mm
Max. cutting depth (mm)	50	50
Stroke (mm)	90	170
Magnetic holder (mm)	81 x 160	84 x 168
Min. thickness (mm)	6	6
Weight (kg)	8.5	13.5
Delivered with	1 x drill protector 3x handles 1x 2.5mm hex key 1x 3mm hex key 1x 4mm hex key 1x 5mm hex key 1x lubrication system 1x safety chain Coolant device Instructions for use	1 x drill protector 3x handles 1x 2.5mm hex key 1x 3mm hex key 1x 4mm hex key 1x 5mm hex key 1x lubrication system 1x safety chain Coolant device Instructions for use
EAN	7612375691993	7612375694161
DEEE	0.21	0.34

ACCESSOIRES

PRIX HT

9954	Promac set of 6 helical drills Weldon shank Depth: 30 mm (6, 7, 8, 9, 10, 11 mm) All drilling machines	103,00 €
9953	Promac set 3 drills + 1 pilot (14, 18, 22 mm) Depth: 30 mm All drills	85,00 €
9956	Set of 6 burs + 1 pilot (12, 14, 16, 18, 20, 22 mm) Depth: 30 mm All drills	294,00 €
18107	Quick-change drill chuck with holder for twist drills 1 - 13 mm (DIN 1897)	112,00 €
20202	FEIN drill adaptor for drills with Weldon shank	103,00 €
20203	Ejector rod suitable for art.-Nr. 20202 - only	38,00 €
20206	Extension adapter	207,00 €
20210	Adapter for use of FEIN-Quick IN shank burs on magnetic drills with Weldon socket	135,00 €
2296	Magnetic stick	53,00 €
18008	Quick-change drill chuck with Morse taper 2 for twist drills ø 1 - 16 mm	117,00 €
18009	Quick-change drill chuck with Morse taper 3 for twist drills ø 1 - 16 mm	122,00 €

MAGNETIC BASE DRILL

MDA-35Q

Supp. with 3 cutters

- 9'000 N magnetic force
- magnetic force on minimum thickness of 6 mm
- Integrated lubrication



Manufactured in Germany

Catalogue price excl.

£ 892

230V & 110V

MDA-50Q

Supp. with 6 cutters

- Additional height adjustment additional by rack and pinion
- 12'000 N of magn. force on thickness of 6 mm
- Lubrication integrated
- Quick Change



Manufactured in Germany

Catalogue price excl.

£1402

230V & 110V

MDA-80Q

Supp. with 6 cutters

- Additional height adjustment additional by rack and pinion
- 16'000 N of force
- magnetic force on thickness of 10 mm
- Lubrication integrated
- Quick Change



Manufactured in Germany

Catalogue price excl.

£1972

230V & 110V

MDA-35Q

230, 1.1
450
19 mm Weldon
9'000
Bits: 12-35, 1-6 mm DIN 338 and 6-13 mm DIN 1897
50
120 + 90
70 x 185
6
11.6

Transport case
Safety chain
Coolant device
Instructions for use
3x Cutting burrs 1 x diameter 14 mm / 18 mm / 22 mm + 1 ejector

7612375534979

0.28

I

MDA-50Q

230 / 1.2
250/450
CM2
12'000
Bits: 12 - 50 mm, drills up to ø 16 mm DIN 338 max 20 per CM2 direct and M3 to M20 with threading device
50
190 / + 100 height adjustment on the motor side
92 x 220
6
15

Carrying case
Safety chain
Coolant device
CM2 quick change
Instructions for use
x 6 x 30mm cutters
1 x diameter 12mm / 14mm / 16mm / 18mm / 20mm / 22mm
18mm / 20mm / 22mm + 1 ejector

7612375534986

0.38

I

MDA-80Q

230 / 1.8
110 / 175 / 245 / 385
CM3
16'000
Cutters: 12 - 80 mm, drills up to ø 16 mm DIN 338 max 32 by CM3 direct and M30 with threading device
110
190 / + 100 height adjustment on the motor side
92 x 220
10
21.8

Carrying case
Safety chain
Coolant device
CM3 quick change
Instructions for use
x 6 x 30mm cutters
1 x diameter 12mm / 14mm / 16mm / 18mm / 20mm / 22mm
18mm / 20mm / 22mm + 1 ejector

7612375538823

0.5

I



DRILL PRESS

R 32

- Automatic mechanical lowering (optional)
- Choice of tables :
- Mechanical table 600 x 345 mm
- Cross table 630 x 255 mm
- Swivel table 325 x 325 mm



Catalogue price excl.

Contact us

R 40

- Automatic mechanical lowering (optional)
- Choice of tables :
- Mechanical table 600 x 345 mm
- Cross table 630 x 255 mm
- Swivel table 325 x 325 mm



Catalogue price excl.

Contact us

R 45

- Automatic mechanical lowering (standard)
- Choice of tables :
- Mechanical table 600 x 460 mm
- Cross table 630 x 255 mm
- Swivel table vice 375 x 375 mm



Catalogue price excl.

Contact us

	R 32		R 40				R 45		
Drilling capacity in R50 steel (mm)	ø 32		ø 40				ø 45		
Tapping capacity in R50 steel (mm)	M 20		M 24				M 26		
Morse Taper	MT3		MT4				MT4		
Throat (mm)	135		135				145		
Spindle sleeve diameter (mm)	62		62				72		
Automatic Lowering (Option) 3 speeds	0.05 – 0.1 – 0.2 trs/min		0.05 – 0.1 – 0.2 trs/min				0.05 – 0.1 – 0.2 trs/min		
3-speed automatic electromagnetic lowering	- -		-				0.05 – 0.1 – 0.2 trs/min		
Column diameter (mm)	123		123				164		
Table	TP – TE – TM		TP – TE – TM – TC				TE – TM – TC		
Transmission	PU	VS	PU	VS	VH	BV	VS	VH*	BV* N° 12
Spindle speeds (rpm)	100 – 2.200	100 – 1.640	100 – 2.200	100 – 1.640	*64 – 2.380	64 – 1.720	100 – 1.650	64 – 2.380	50 – 1.300
Motor power (380 V 50 Hz) kW	1.1 – 1.84		1.1 – 1.84	1.1 – 1.84	2.2	1.1 – 1.84	2.2 – 3	2.2	2.2 – 3
Weigth (kg)	370		410 TE TM / 470 TC				548 TE TM / 610 TC		
EAN	contact us		contact us				contact us		
DEEE	9.25		10.25 / 11.75				13.7 / 15.25		
RANGE	R		R				R		

DRILL PRESS

V22

- Transmission by pulleys with manual gear change
- Choice of tables :
 - Mechanical table 350 x 250 mm
 - Swivel table 350 x 250 mm
 - Cross table 630 x 255 mm
 - Swivel table vice 375 x 375 mm
- Available with electronic drive (V22E)
- Available as a column and as a workbench



Made in Italy

Catalogue price excl.

Contact us

F22

- Choice of tables :
 - Mechanics' table 350 x 250 mm
 - Swivel table 350 x 250 mm
 - Swivel table vice 350 x 250 mm
 - Cross table 475 x 153 mm
- Available as a column and bench table



Made in Italy

Catalogue price excl.

Contact us

F28

- Choice of tables :
 - Mechanics' table 350 x 250 mm
 - Swivel table 350 x 250 mm
 - Swivel table vice 350 x 250 mm
 - Cross table 475 x 153 mm



Made in Italy

Catalogue price excl.

Contact us

	V22	F22	F28
Drilling capacity in R50 steel (mm)	ø 22	ø 22	ø 28
Tapping capacity in R50 steel (mm))	M14	M 14	M 18
Morse Taper	CM2	CM2	CM3
Spindle stroke (mm)	90	90	120
Spindle sleeve diameter (mm)	52	52	62
Column diameter (mm)	98	98	98
Transmission	PU Pulley	Variable	Variable
Spindle speeds (rpm)	255 - 3'850	320 - 2'680	250 - 2'150
Motor Power (380 V 50 Hz) kW	0.55	0.75	1.1
Weight (kg)	170 (établi) / 90 (colonne)	128 (établi) / 160 (TMF) / 188	195
EAN	contact us	contact us	contact us
DEEE	4.25 / 2.25	3.2 / 4 / 4.7	4.87
RANGE	R	R	R

Slide and clamping wedge

REF	DESCRIPTION	PRICE
2530	T8 T-nut	£ 57,00
9938	T10 T-nut	£ 30,00
9249	T12 T-nut	£ 28, 00
9763	T12 clamping wedge assortment	£ 267,00
9336	T14 T-nut	£ 46,00
9728	T14 clamping wedge assortment	£ 267,00
9337	T16 T-nut	£ 51,00
10026	T16 clamping wedge assortment	£ 361,00


9249 - T12 T-nut




9728 - Clamping wedge



9082 - Manual vice



9984 - Industrial vice



2021 - Quick-release vice



2086 - Auto chaser



2040 - Reducer



Vices

REF	DESCRIPTION	OPENING	L x P x H	PRICE
9082	Manual vice 85 mm	83 mm	290 x 170 x 52 mm	£ 99,00
9053	Manual vice 100 mm	100 mm	165 x 190 x 57 mm	£ 59,00
9083	Manual vice 102 mm	97 mm	340 x 200 x 60 mm	£ 94,00
9098	Manual vice 130 mm	120 mm	230 x 380 x 75 mm	£ 131,00
2025	Manual vice 155 mm	130 mm	225 x 450 x 75 mm	£ 239,00

Quick-release vices


REF	DESCRIPTION	OPENING	L x P x H	PRICE
2021	Quick-release vice 105 mm	105 mm	290 x 190 x 80 mm	£ 119,00
2022	Quick-release vice 156 mm	156 mm	364 x 250 x 93 mm	£ 246,00
2284	3-position vice 100 mm	101 mm	340 x 155 x 63 mm	£ 121,00
2021A	Slide vice 105 mm T10/T12	105 mm	400 x 134 x 75 mm	£ 157,00
2167	Cross table clamping 150 mm	130 mm	450 x 450 x 160 mm	£ 317,00
9984	Milling Vise 100 mm	104 mm	254 x 369 x 138 mm	£ 665,00
9985	Milling Vise 125 mm	85 mm	150 x 345 x 135 mm	£ 436,00
2086	Automatic cone chaser	-	-	£ 86,00

CM Reducer

REF	DESCRIPTION	PRICE
2040	Reducer CM2/CM1	£ 19,00
2087	Reducer CM3/CM2	£ 21,00
2088	Reducer CM4/CM2	£ 27,00
9841	Reducer CM4/CM3	£ 27,00

Drill sets

REF	DESCRIPTION	PRICE
D-19GS	Set of 19 Cobalt Drills Sizes 1 to 10mm by 0.5mm	£ 23,00
D-19CO	Set of 19 HSS drills Sizes 1 to 10mm by 0.5mm	£ 51,00
D-25GS	Set of 25 HSS drills Sizes 1 to 13mm by 0.5mm	£ 47,00
D-3	Set of 3 step drills 4-12/4-20/6-30mm	£ 60,00
D-6	Chamfering cutters 6pcs 6.3/8.3/10.4/12.4/16.5	£ 46,00

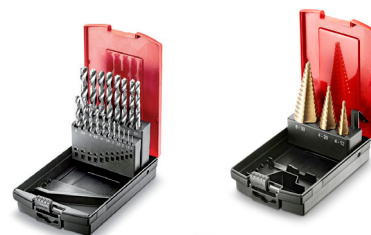

Key chuck (supplied without adapter)

REF	DESCRIPTION	PRICE
100390	0.5 to 13 mm chuck B16	£ 43,00
100395	Replacement key	£ 18,00
100392	0.5 to 16 mm chuck B16	£ 22,00
100396	Replacement key	£ 18,00
100393	Mandrin de 0,5 à 13 mm attache B18 0.5 to 13 mm chuck B18	£ 50,00
100396	Replacement key	£ 18,00

Self-tightening chuck

REF	DESCRIPTION	PRICE
9473	Chuck 0.5 to 13 mm B16	£136,00
9457	Chuck 1,1 to 16 mm B18	£174,00



Misc.

REF	DESCRIPTION	PRICE
2296	Magnetic stick	£ 48,00



Tap holder chuck

REF	DESCRIPTION	PRICE
2023	Machine tap holder from 4 to 12 cm².	£117,00
2024	Machine tap holder from 8 to 20 cm³	£159,00
2001	Tapping device from M2 to M6 CM2	£310,00
X-829	Magnetic lamp	£ 43,00
18002	WELDON CM3 tiller holder	£123,00
9956	Sets of 6 burs (ø 12/14/16/18/20/22)	£263,00
100188	Morse taper CM2/B16	£ 26,00
9164	Morse taper CM2/B18	£ 37,00
9778	Morse taper CM3/B16	£ 27,00
9165	Morse taper CM3/B18	£ 49,00
9167	Morse taper CM3/B22	£ 54,00
2037	Morse taper CM1/B16	£ 20,00
9877	Morse taper CM4/B18	£ 56,00
2046	Base for benchtop drilling machine	£350,00
2064	Coolant Kit 240V	£439,00
2065	Coolant Kit 400V	£439,00

9877 - Cône morse



2023 - Porte taraud



2001 - Appareil taraudage



DRILLING, MILLING AND TAPPING MACHINES

JMD-1-M

- Micrometric lowering of the spindle
- Bottom puller M10 / self-tightening chuck
- 1 – 10 mm / CM2 morse taper
- 45° tiltable L&R
- Variable speed drive / two speed ranges per
- mechanical gearbox

230V



Catalogue price excl.

£ 715

JMD-3-M

- Brushless motor / mechanical gearbox
- Digital display / electronic speed control
- Left / right running with M12 thread function
- Precise spindle adjustment with
- digital depth display
- 90°L and 45°R tilting head
- Micrometric lowering of the spindle
- M12 bottom puller / servo chuck protection
- Base: 5000046-G (option)

230V

BRUSHLESS MOTOR



Catalogue price excl.

£2869

FX-820VA

- Digital speed display
- 45° right and 45° left tilting head
- Precise spindle adjustment with
- digital depth display
- Precise X and Y adjustment
- Servo chuck guard / cone
- CM2 morse taper / M10 bottom puller

**Tray
Recoverer 2298**

Base 2297

230V



Catalogue price excl.

£1941

	JMD-1-M	JMD-3-M	FX-820VA
Motor (V / kW)	230 / 0.15	230 / 1	230 / 0.75
Morse taper	CM2	CM3	CM2
Steel capacity (ø-mm)	10	25	20
Tapping	-	M12	-
Spindle stroke (mm)	30	70	50
Surface milling capacity (mm)	20	50	63
Number of speeds	Variable	Variable	Variable
Speed range (min-¹)	0-2'000	100-1'800	300 - 1'150 / 600 - 2'300
X axis, longitudinal stroke (mm)	190	400	480
Y-axis, transverse stroke (mm)	100	150	175
Z axis, vertical travel (mm)	265	300	280
Throat (mm)	140	230	160
Dimensions table (mm)	145 x 240	160 x 510	700 x 180
T-Nut slots (mm)	T8	T12	T12
Dimensions (mm)	550 x 450 x 630	700 x 560 x 850	860 x 550 x 860
Weight (kg)	40	165	122
Delivered with	10 mm drill holder with CM2 chuck Drive bar M10 Servo chuck protection Instructions for use	13 mm drill holder with CM3 chuck Drive bar M12 Servo chuck protection Instructions for use	1 bottom puller M10 1 set of spanners 2.5, 3, 4, 5, 6 mm 2 sliding blocks T12 mm 1 adapter CM II / B 18 1 open-end spanner 17 / 19 mm 2 screwdrivers (slot + PH) 1 tool driver
EAN	7612375503982	7612375504002	7612375608991
DEEE	1	4.125	3.05
RANGE	P	I	I
Option	Spare parts list		Base reference 2297

DRILLING, MILLING AND TAPPING MACHINES

PBM-1839V

- Mechanical gearbox / variable speed drive 100-2000 rpm
- Large 700 x 160 mm cross table
- Emergency stop on front panel
- Digital speed display
- Switch with anti restart coil

230V

Catalogue price excl.

£2275

PBM-1839BDV

- Brushless motor / mechanical gearbox
- Variable speed drive from 100 - 2'000
- Large cross table 700 x 160 mm
- Left / right running with M12 thread function
- Digital speed display
- Switch with anti restart / emergency stop

230V

BRUSHLESS MOTOR

Catalogue price excl.

£2610

JMDT-763016

- Belt drive
- Large table 730 x 210
- Max. drilling steel 30
- Spindle stroke 120
- Tapping M16
- End milling 76

230V

Catalogue price excl.

£2596

	PBM-1839V	PBM-1839BDV	JMDT-763016
Motor (V / kW)	230 / 0.75	230 / 0.75	230 / 1.5
Morse taper	CM3	CM3	CM3
Steel Capacity (ø-mm)	20	20	30
Tapping	-	M12	M16
Spindle stroke (mm)	70	70	120
Surface milling capacity (mm)	50	50	76
Number of speeds	Variable	Variable	12
Speed range (min ⁻¹)	100 - 2'000	100 - 2'000	100 - 2'080
X axis, longitudinal stroke (mm)	400	400	500
Y-axis, transverse stroke (mm)	190	190	210
Z axis, vertical travel (mm)	260	290	440
Throat (mm)	190	190	200
Dimensions table (mm)	700 x 160	700 x 160	730 x 210
T-Nut slots (mm)	T12	T12	T14
Dimensions (mm)	790 x 640 x 855	725 x 620 x 880	950 x 760 x 1'150
Weight (kg)	110	110	280
Delivered with	13 mm drill holder with CM3 chuck Drive bar M12 Servo chuck protection Instructions for use	• Porte-foret 13 mm avec mandrin CM3 • Barre d'entraînement M12 • Protection mandrin asservi • Mode d'emploi	
EAN	7612375531091	7612375519884	7612375631456
DEEE	2.75	2.75	7
RANGE	I	I	R
Option	Spare parts list		

DRILLING-MILLING-TAPPING MACHINES

FX-388D

- 2-speed engine with mechanical gearbox
- 6-speed gearbox
- 90° L and 60° R tilting head
- L / R operation with M16
- M16 threading device
- Head on dovetail slide
- Removable control panel / Morse taper CM3



400V

Catalogue price excl.

£6877

JMD-45PFD-T

- Automatic lowering of the spindle
- Left/right running with reversal of direction of rotation M20 threading
- 3 axis spindle / 2 speed motor
- Dovetail head adjustable in height, tiltable 90°L and 30°R
- Supplied with CM2 / B16 / M12 bottom puller adapter

Base 350045-G



400V

Catalogue price excl.

£6547

JM-125DRO

- 3-axis screw
- 360° tilting head
- Central lubrication system
- Motorised X, Y and Z axes

400V



Catalogue price excl.

£18937

	FX-388D	JMD-45PFD-T	JM-125DRO
Motor (V / kW)	400 / 0.75	400 / 1.1	400 / 3
Morse taper	CM3	ISO-30	CM4
Max. steel capacity (ø-mm)	32	32	32
Tapping	M16	M20	M16
Spindle stroke (mm)	120	107	-
Surface milling capacity (mm)	80	100	ø 125
Number of speeds	12	12	11
Speed range (min-1)	50 - 1'250 / 100 - 2'500	50 - 2'500	45 - 1660
X axis, longitudinal stroke (mm)	285	520	1000
Y-axis, transverse stroke (mm)	410	210	380
Z axis, vertical travel (mm)	420	460	400
Throat (mm)	275	250	100 - 500
Dimensions table (mm)	730 x 210	825 x 240	1370 x 300
T-Nut slots (mm)	T16	T16	T14
Dimensions (mm)	1'090 x 1'090 x 1'060	1'080 x 1'010 x 1'300	1830 x 1760 x 1700
Weight (kg)	440	332	1750
Delivered with	Servo-controlled chuck guard Integrated lubrication Chip tray and base	Vise 85 mm, swivel Drill bit holder 13 mm with ISO-30 chuck HM milling cutter, diam. 75 mm / drive bar M12	Lubrication system Original DRO Instructions for use
EAN	7612375608137	7612375503845	7612375690217
DEEE	11	8.3	43.75
RANGE	R	R	R

DRILLING-MILLING-TAPPING MACHINES

JMDT-764016X

NEW

- Mechanical gearbox
- 730 x 210 table (standard)
- Max drilling steel 40
- Spindle stroke 130, Z adjustment by the head and by the table (racks)
- 180° tilting head
- **New on this machine: X-axis feed (longitudinal) is fitted as standard**

400V



Catalogue price excl.

£4173

JMDT-804516XDRO

NEW

- Mechanical gearbox
- 3-axis screwdriver / speed variator
- Manual and micrometric spindle lowering
- Integrated lubrication
- Reversal of direction of rotation M16 thread
- 180° tilting head
- **New on this machine: the X-axis (longitudinal) feed is mounted as standard**

400V




Catalogue price excl.

£5526

	JMDT-764016X-DRO	JMDT-804516X-DRO
Motor (V / kW)	400 / 1.5	400 / 1.5
Morse taper	CM4	CM4
Max. steel capacity (ø-mm)	40	45
Tapping	M16	M16
Spindle stroke (mm)	130	120
Surface milling capacity (mm)	ø76	80
Number of speeds	12	Variable
Speed range (min-1)	75 - 3200	75 - 2'500
X axis, longitudinal stroke (mm)	370	560
Y-axis, transverse stroke (mm)	180	190
Z axis, vertical travel (mm)	610	350
Throat (mm)	280	245
Dimensions table (mm)	730 x 210	800 x 240
T-Nut slots (mm)	T14	T14
Dimensions (mm)	830 x 760 x 1'885	1280 x 1240 x 2100
Weight (kg)	350	400
Delivered with		Adapter CM4 / B16 Bottom puller M16 Servo chuck protector
EAN	7612375694345	7612375694352
DEEE	8.75	10
RANGE	R	R

Slide and clamping wedge

REF	DESCRIPTION	PRICE
50000036	55x75mm WHEEL ON TURNABLE BASE (JMD-1)	£126,00
50000038	MANDREL CM2/Ø13mm	£139,00
50000026	DIVIDER PLATE	£518,00
50000027	SET OF 6 PINS(CM2)3.4.5.6.8.10mm	£ 92,00
9667	PLIERS BOX CM3/ER32 - 6 PLIERS(6,8,10,12,16,20)	£622,00
50000060	SET OF 7 CM3 PINS (4,6,8,10,12,14,16mm)(JMD-3)	£271,00
50000029	DIVIDING DISCS FOR TRAY 50000026	£120,00
50000033	3-MOR 80mm MANDREL (JMD-1/JMD-2)	£156,00
50000034	4- MORS 80mm MANDREL (JMD-1/JMD-2)	£145,00
50000032	COUNTER TRAY (JMD-1/JMD-2)	£23 ,00
50000031	COUNTER TIP FOR TRAY 50000026	£120,00
50000037	SET OF 6 HSS CYLINDER SHAFT MILLERS - (3,4,5,6,8 and 10)	£ 50,00
50000065	DIVIDER TRAY Ø150mm (JMD-3)	£642,00
50000066	DIVIDER DISC SET D150mm	£155,00
50000915	4-BIT MANDREL Ø100mm (BD-7/BD-8)	£230,00
50000067	AGAINST DOLL FOR 50000065	£251,00
50000057	DRILLING TABLE HORIZONTAL MILLING	£262,00
50000063	SLOTTED TABLE WITH ANGLE ADJUSTMENT	£215,00
9850	DIVIDER TABLE 150mm	£654,00
9851	DIVIDER DISC SET FOR 9850	£227,00
9853	COUNTERFOIL FOR 9850	£251,00
9854	DIVIDER PLATE 100mm	£1127,00
2065A	LUBRICATION SYSTEM 400/50/3	£439,00
50000105	CLAMP HOLDER CASE	£509,00
50000104	SA-30/B16 ADAPTER (JMD-45PFD)	£97,00
50000028	Slider T 8	£266,00
9249	Slider T 12	£ 28,00
9763	Slide and wedge T12	£267,00
9336	Slider T 14	£46,00
9728	Slide and wedge T14	£267,00
9337	Slider T 16	£51,00
10026	Slide and wedge T16	£361,00
9984	Milling turntable vices 127 x33 mm opening 108 mm	£665,00
9985	ETAU A FRAISER 125mm	£436,00
9908	ETAU A FRAISER 100mm	£328,00
2297	FX 820VA SOCKET	£269,00
2298	FX-820VA RECOVERY TRAY	£ 37,00
50000056-G	SOCKET JMD-3	£536,00
2001	TAPPING DEVICE 2-6mm(CM2)	£310,00
2086	AUTOMATIC CONE FLUSH	£ 86,00
2087	REDUCER CM3/CM2	£ 21,00
2088	REDUCER CM4/CM2	£ 27,00
9667	PLIERS BOX CM3/ER32 - 6 PLIERS(6,8,10,12,16,20)	£622,00
X_829	Lamp	£ 43,00
9982	Milling Kit CM3 - **9165+9457+9667+9728+9908**	£885,00
2023	Machine Gate CM2 (4-12mm)	£117,00
2024	MACHINE GATE CM3 (8-20mm)	£159,00
9165	CM3/B18 ADAPTER	£ 37,00
9457	SELF-CONTAINING MANDRINK 1-16mm/B18	£174,00



PORTABLE CIRCULAR SAWS

308C

- Abrasive disc cutter ø 355 mm
- Light, powerful & handy / dry cutting
- For steel; aluminium & non-ferrous alloys
- Cutting capacity in mm

CUTTING CAPACITIES IN MM

					
90°	120 mm		90°	108 mm	
45°	90 mm		45°	55 mm	

					
90°	241 x 63 mm				
45°	90 x 50 mm				



230V

Catalogue price excl.

£ 313

230V

Catalogue price excl.

£ 935



309C

- Carbide-tipped cutter ø 355 mm
- Ideal for clean cuts in steel; stainless steel
- aluminium & non-ferrous alloys; dry cutting

CUTTING CAPACITIES IN MM

					
90°	130 mm		90°	115 mm	
45°	90 mm		45°	55 mm	
					
90°	115 x 95 mm				
45°	90 x 50 mm				

	308C	309C
Motor (V / kW)	230 / 2.2	230 / 2.2
Blade Speed (TPM)	3'900	1'300
Wheel Dimension (ø, mm)	355 x 25.4 x 2.8	355 x 25.4 x 2.6
Tilting vice	non	45°
Vice opening (mm)	120	120
Noise Level (Db)	103	103
Dimensions (mm)	300 x 600 x 700	300 x 600 x 700
Stand	optional	optional
Weight (kg)	17	24
Delivered with	Cut-off wheel ø 355 x 25.4 x 2.8 mm User's manual	Carbide tipped blade ø 355 mm x 25.4 x 2.6 mm in 70 teeth Instruction manual & service keys
EAN	7612375600483	7612375600339
DEEE	0.43	0.58
RANGE	P	P

CIRCULAR SAWS

SY-250A

- 2-speed motor
- Thermal overload protection
- Integrated 100 mm vice
- For left and right mitre cuts

- With lubrication system
- Delivered with saw blade without base
- Optional base 218 (A range)

400V

CUTTING CAPACITIES IN MM

90°	75 mm
45° right	65 mm
45° left	65 mm

90°	65 mm
45° right	55 mm
45° left	55 mm

90°	90 x 50 mm
45° right	60 x 50 mm
45° left	60 x 50 mm

90°	30 mm
45° right	30 mm
45° left	30 mm

OPTIONAL BASE

Catalogue price excl.

£1973



SY-315L

- 2-speed motor
- Reduced blade speed for cutting
- steel and solid materials
- Thermal overload protection

- 120 mm quick clamping vice
- For left and right mitre cuts
- Lubrication system
- Supplied with saw blade

400V

SPECIAL INOX

CUTTING CAPACITIES IN MM

90°	100 mm
45° right	90 mm
45° left	90 mm

90°	82 mm
45° right	80 mm
45° left	80 mm

90°	100 x 70 mm
45° right	85 x 70 mm
45° left	85 x 70 mm

90°	50 mm
45° right	50 mm
45° left	50 mm

Catalogue price excl.

£2809



	SY-250A	SY-315L
Motor (V / kW)	400 / 0.95	400 / 1.3
Blade speed (TPM)	45 / 90	22 / 44
Angle mitre	45°R	45°L / 45°R
Blade (ø-mm)	250	315
Working height (mm)	-	960
Base	no	yes
Dimensions (mm)	935 x 960 x 930	690 x 1'100 x 1'750
Weight (kg)	120	160
Delivered with	Saw blade Lubrication system	Saw blade
EAN	7612375607987	7612375605525
DEEE	3.0	4.0
RANGE	R	R

CIRCULAR SAWS

SY-315

- 2-speed motor
- Thermal overload protection
- 120 mm quick clamping vice
- For left and right mitre cuts
- With lubrication system

- Heavy duty base for better stability
- Supplied with saw blade


400V


Catalogue price excl.


£2809

CUTTING CAPACITIES IN MM

	
90°	100 mm
45° right	90 mm
45° left	90 mm

	
90°	82 mm
45° right	80 mm
45° left	80 mm

	
90°	100 x 70 mm
45° right	85 x 70 mm
45° left	85 x 70 mm

	
90°	50 mm
45° right	50 mm
45° left	50 mm



SY-350V

- Electronic variable speed drive
- Thermal overload protection
- 90° head rotation for notching
- 170 mm quick clamping vice

- For left and right mitre cuts
- With lubrication system
- Supplied with saw blade
- Digital speed display


400V

Catalogue price excl.

£4715

CUTTING CAPACITIES IN MM

	
90°	120 mm
45° right	100 mm
45° left	100 mm

	
90°	105 mm
45° right	85 mm
45° left	85 mm

	
90°	160 x 90 mm
45° right	85 x 70 mm
45° left	85 x 70 mm



TH-33

- Base and cut-off wheel
- 24 volt controls

- Quick-clamping vice with 115 mm opening
- 45° cutting angle left/right


400V


Catalogue price excl.


£4030

CUTTING CAPACITIES IN MM

	
90°	120 mm
45° right	105 mm
45° left	105 mm

	
90°	95 x 95 mm
45° right	80 x 80 mm
45° left	80 x 80 mm

	
90°	115 x 90 mm
45° right	80 x 90 mm
45° left	80 x 90 mm

	
90°	50 mm
45° right	50 mm
45° left	50 mm



	SY-315	SY-350V	TH-33
Motor (V / kW)	400 / 1.3	400 / 2.25	400 / 5.5
Blade speed (TPM)	44 / 88	24 / 120	4'100
Angle mitre	45°L / 45°R	45°L / 45°R	45°L / 45°R
Blade (ø-mm)	315	350	350
Working height (mm)	960	985	965
Base	yes	yes	yes
Dimensions (mm)	690 x 1'100 x 1'750	1'020 x 990 x 1'830	1'900 x 500 x 1'150
Poids (kg)	160	250	160
Delivered with	Saw blade	Saw blade Lubrication system Base	Base and cut-off wheel 24 volt controls Quick-clamping vice with 115 mm opening 45° cutting angle left/right
EAN	7612375605518	7612375607659	7612375521528
DEEE	4.0	6.25	4.0
RANGE	R	R	R

PORTABLE SAWS

347V

- Band saw with speed control
- 45° straight cut by turning the bow

230V

Catalogue price excl.

£ 508



CUTTING CAPACITIES IN MM

90°	100 mm
45°	65 mm

90°	105 mm
45°	65 mm

90°	105 x 100 mm
45°	65 x 60 mm

349V

- Band saw with speed control
- 60° straight cut by turning the bow

230V & 110V

Catalogue price excl.

£ 565



CUTTING CAPACITIES IN MM

90°	125 mm
45° right	85 mm
60° right	50 mm

90°	125 mm
45° right	85 mm
60° right	50 mm

90°	125 x 125 mm
45° right	85 x 85 mm
60° right	50 x 50 mm

349V2

- Portable manual band saw
- Variable speed drive
- For dry cutting
- Light, powerful and precise
- Variable speed drive (38-80 mm)
- 60° swivel bow R

230V

Catalogue price excl.

£ 565



CUTTING CAPACITIES IN MM

90°	125 mm
45° right	80 mm
60° right	50 mm

90°	125 mm
45° right	80 mm
60° right	50 mm

90°	125 x 125 mm
45° right	80 x 80 mm
60° right	50 x 50 mm

	347V	349V	349V2
Motor (V / kW)	230 / 0.85	230 / 1.0	230 / 0.4
Blade speed (m / min-1)	30 to 80 variable	25 to 80 variable	38 to 80 variable
Blade dimensions (mm)	1'330 x 12.7 x 0.64	1'440 x 12.7 x 0.64	1'435 x 12.7 x 0.65
Bow mitre	45° right	60° à right	60° right
Vice opening (mm)	115	135	129
Dimensions (mm)	650 x 310 x 450	375 x 724 x 446	305 x 705 x 405
Weight (kg)	19	19.5	23
Delivered with	1'330 x 12.7 x 0.64 mm blade User's manual Service keys Adjustable longitudinal stop	1,440 x 12.7 x 0.64 mm blade User's manual Service keys Adjustable longitudinal stop	1'435 x 12.7 x 0.65 mm blade User's manual Service keys Adjustable longitudinal stop
EAN	7612375504484	7612375601534	7612375694185
DEEE	0.48	0.53	0.58

PORTABLE SAWS

348C

- Metal cutting bandsaw with assisted descent
- 45° straight cut by rotating the bow

230V

Catalogue price excl.

£ 750

CUTTING CAPACITIES IN MM



90° 100 mm
45° right 75 mm



90° 100 mm
45° right 75 mm




90° 100 x 150 mm
45° right 60 x 100 mm



10048

- Stand for 308C;
- 309C; 348C; 349V; 349V2

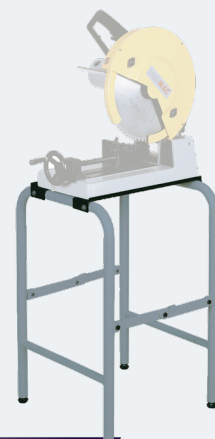

Catalogue price excl.

£ 186

351V


- Band saw with speed control
- 60° straight cut by rotating the bow
- 20 x 0.9 mm section band

230V

Catalogue price excl.

£1251

CUTTING CAPACITIES IN MM



90° 166 x 150 mm
45° 130 x 150 mm
60° 75 x 75 mm



90° 170 mm
45° 125 mm
60° 75 mm



90° 166 mm
45° 130 mm
60° 75 mm



2247

- Saw base for 351V



Catalogue price excl.

£ 187

	348C	351V	10048	2247
Motor (V / kW)	230 / 0.37	230 / 1.65	-	-
Blade speed (m / min ⁻¹)	45	30 to 80 variable	-	-
Blade dimensions (mm)	1'470 x 12.7 x 0.64	2'035 x 20 x 0.90	-	-
Bow mitre	45° right	60° right	-	-
Vice opening (mm)	190	205	-	-
Dimensions (mm)	350 x 800 x 450	550 x 1'100 x 600	-	-
Weight (kg)	23	35	10	15
Delivered with	1'470 x 12.7 x 0.64 mm blade User's manual Service keys Adjustable longitudinal stop	2'035 x 20 x 0.90 mm blade User's manual Service keys Adjustable longitudinal stop	-	-
EAN	7612375600504	7612375608298	7612375603514	7612375608335
DEEE	0.58	0.88	-	-
RANGE	P	P	A	A

MANUAL BANDSAWS

SX-815DA

- Manual band saw
- Cutting at 60° right by turning the bow
- the bow



230V

Catalogue price excl.

£1089



90°	150 mm
45°	105 mm
60°	65 mm



90°	150 mm
45°	105 mm
60°	70 mm



90°	170 x 150 mm
45°	105 x 130 mm
60°	65 x 80 mm

SX-815DVP

- Band saw with downhill brake;
- variable speed drive & lubrication
- 60° straight cut by rotating the bow



230V

Catalogue price excl.

£1365



90°	150 mm
45°	95 mm
60°	55 mm



90°	150 mm
45°	95 mm
60°	55 mm



90°	160 x 150 mm
45°	95 x 130 mm
60°	55 x 80 mm

SX-822DB-M


- Manual band saw ø 225 mm with lubrication
- Cutting at 60° right by turning the bow



230V

Catalogue price excl.

£3207



90°	225 mm
45°	160 mm
60°	100 mm



90°	225 mm
45°	160 mm
60°	100 mm



90°	245 x 180 mm
45°	160 x 160 mm
60°	100 x 100 mm

	SX815DA	SX815DVP	SX822DB-M
Motor (V / kW)	230 / 0.37	230 / 1.1	230 / 1.1
Blade speed (m / min-1)	65	20 to 65 variable	65
Blade Dimensions (mm)	1'740 x 12.7 x 0.64	1'740 x 12.7 x 0.64	2'480 x 27 x 0.9
Bow mitre	60° right	60° right	60° right
Vice opening (mm)	175	155	260
Working height (mm)	880	880	980
Dimensions (mm)	1'650 x 1'020 x 370	1'650 x 1'020 x 370	1'570 x 1'500 x 935
Weight (kg)	84	105	265
Delivered with	1,740 x 12.7 x 0.64 mm blade User's manual Service keys Adjustable longitudinal stop Base	1,740 x 12.7 x 0.64 mm blade User's manual Service keys Adjustable longitudinal stop Base	2,480 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base
EAN	7612375534870	7612375607697	7612375538878
DEEE	2.10	2.10	6.63
RANGE	P	P	R

ASSISTED & MANUAL BANDSAWS

SX-818DV

- Downfeed band saw with dimmer & lubrication
- 60° straight cut by rotating the bow

230V

Catalogue price excl.

£2356

CUTTING CAPACITIES IN MM



90°	175 mm
45°	115 mm
60°	60 mm



90°	180 mm
45°	110 mm
60°	60 mm



90°	200 x 150 mm
45°	105 x 90 mm
60°	60 x 60 mm



917C: 400V | 917M: 230V

- Downfeed band saw with dimmer & lubrication
- 60° straight cut by rotating the bow

400V &
230V

Catalogue price excl.

£2551

CUTTING CAPACITIES IN MM




90°	180 mm
45°	100 mm



90°	180 mm
45°	100 mm



90°	267 x 180 mm
45°	125 x 102 mm

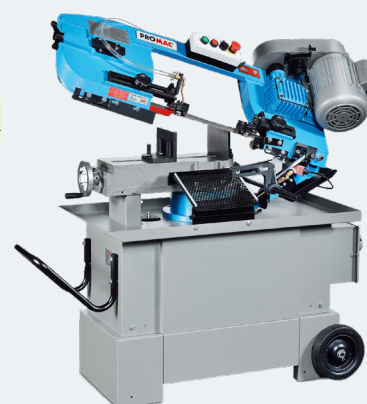

SX-821DA

- Downfeed band saw with 2 speeds
- 60° straight cut by turning the bow
- New trigger

400V


Catalogue price excl.

£3362

CUTTING CAPACITIES IN MM



90°	225 mm
45°	150 mm
60°	90 mm



90°	220 mm
45°	140 mm
60°	90 mm



90°	240 x 160 mm
45°	210 x 140 mm
60°	90 x 90 mm



	SX818DV	917C: 400V 917M: 230V	SX821DA
Motor (V / kW)	230 / 2.0	400V / 0.75 230V / 0.75	400 / 2.0
Blade speed (m / min-1)	30 to 80 variable	22; 33; 45; 60 per drive	35 to 70
Blade Dimensions (mm)	2'080 x 20 x 0.9	2'360 x 20 x 0.9	2'455 x 27 x 0.9
Bow mitre	60° right	45° right	60°
Vice opening (mm)	230	270	240
Working height (mm)	980	680	980
Dimensions (mm)	1'350 x 715 x 1'326	1'250 x 1'240 x 500	1'500 x 1'100 x 1'750
Weight (kg)	195	180	220
Delivered with	2'080 x 20 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base	2'360 x 20 x 0.9 mm blade User's manual Service keys Service keys Base	2'455 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base
EAN	7612375607857	7612375508765 / 7612375538885	7612375538861
DEEE	4.88	4.88	5.50
RANGE	R	I	R

ASSISTED & MANUAL BANDSAWS

SX-823DG

- Manual band saw & assisted descent $\varnothing$ 220 mm
- with lubrication
- Cutting at 60° right & 45° left by rotation of the bow

CUTTING CAPACITIES IN MM

	90°	220 mm		90°	260 x 90 mm
	45°	150 mm		45°	145 x 125 mm
	60°	90 mm		60°	85 x 85 mm
	L 45°	110 mm		L 45°	160 x 45 mm

	90°	220 mm
	45°	140 mm
	60°	90 mm
	L 45°	110 mm




Catalogue price excl.

£4289

SX-823DGV

- Manual band saw & assisted descent $\varnothing$ 220 mm
- with lubrication
- Cutting at 60° right & 45° left by rotation of the bow

CUTTING CAPACITIES IN MM

	90°	220 mm		90°	260 x 90 mm
	45°	150 mm		45°	145 x 125 mm
	60°	90 mm		60°	85 x 85 mm
	L 45°	110 mm		L 45°	160 x 45 mm

	90°	220 mm
	45°	140 mm
	60°	90 mm
	L 45°	110 mm



400V

Catalogue price excl.

£4959

	SX823DG	SX823DGV
Motor (V / kW)	400 / 1.1	400 / 1.1
Blade speed (m / min-1)	36 - 72	20 to 85 per variable speed drive
Blade Dimensions (mm)	2'455 x 27 x 0.9	2'455 x 27 x 0.9
Bow mitre	60° right & 45° left	60° right & 45° left
Vice opening (mm)	260	260
Working height (mm)	850	850
Dimensions (mm)	1'100 x 1'800 x 1'700	1'100 x 1'800 x 1'700
Weight (kg)	280	280
Delivered with	2'455 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base	2'455 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base
EAN	7612375534900	7612375608182
DEEE	7	7
RANGE	R	R

ASSISTED & MANUAL BANDSAWS

SX-824DG

- Manual band saw & assisted descent $\varnothing$ 240 mm
- with lubrication
- Cutting at 60° right & 45° left by turning the bow

CUTTING CAPACITIES IN MM

90°	240 mm	90°	270 x 240 mm
45°	200 mm	45° right	200 x 200 mm
60°	125 mm	60° right	125 x 125 mm
L 45°	160 mm	L 45°	150 x 150 mm

90° right	240 mm
45° right	200 mm
60° right	125 mm
G	110 mm



400V

Catalogue price excl.

£5303

SX-827DGUI

- Manual band saw & assisted descent $\varnothing$ 270 mm
- with lubrication
- Cutting at 60° right & 45° left by turning the bow

CUTTING CAPACITIES IN MM

90°	270 mm	90°	350 x 260 mm
45° right	240 mm	45° right	220 x 220 mm
60° right	160 mm	60° right	150 x 150 mm
L 45°	210 mm	G	180 x 180 mm

90°	260 mm
45° right	220 mm
60° right	160 mm
G	160 mm



400V

Catalogue price excl.

£7210

	SX824DG	SX827DGUI
Motor (V / kW)	400 / 1.2	400 / 1.5
Blade speed (m / min ⁻¹)	35 – 70	20 to 85 per variable speed drive
Blade Dimensions (mm)	2'730 x 27 x 0.9	3'160 x 27 x 0.9
Bow mitre	60° right & 45° left	60° right & 45° left
Vice opening (mm)	300	360
Working height (mm)	920	860
Dimensions (mm)	715 x 1'800 x 1'900	715 x 1'800 x 1'900
Weight (kg)	310	360
Delivered with	2'730 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base	3'160 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base
EAN	7612375608625	7612375503432
DEEE	7.75	9
RANGE	R	R

SEMI-AUTOMATIC BANDSAWS

SX-823DGSVI

- Semi-automatic band saw $\varnothing$ 220 mm with lubrication
- Cutting at 60° right & 45° left by rotation of the bow

CUTTING CAPACITIES IN MM

			
90°	220 mm	90°	260 x 90 mm
45°	150 mm	45°	145 x 125 mm
60°	90 mm	60°	85 x 85 mm
L 45°	110 mm	L	160 x 45 mm

	
90°	220 mm
45°	140 mm
60°	90 mm
L	110 mm

400V



Catalogue price excl.

£7055

SX-827DGSVI

- Semi-automatic band saw $\varnothing$ 270 mm with lubrication
- Cutting at 60° right & 45° left by rotation of the bow

CUTTING CAPACITIES IN MM

			
90°	260 mm	90°	350 x 260 mm
45°	220 mm	45°	220 x 220 mm
60°	150 mm	60°	150 x 150 mm
L 45°	160 mm	L	180 x 180 mm

	
90°	260 mm
45°	220 mm
60°	160 mm
L	160 mm

400V



Catalogue price excl.


£9058

	SX823DGSVI	SX827DGSVI
Motor (V / kW)	400 / 1.1	400 / 1.5
Blade speed (m / min ⁻¹)	20 to 85 variable speed drive	20 to 85 variable speed drive
Blade Dimensions (mm)	2'455 x 27 x 0.9	3'160 x 27 x 0.9
Bow mitre	60° right & 45° left	60° right & 45° left
Vice opening (mm)	260	360
Working height (mm)	850	900
Dimensions (mm)	1'100 x 1'800 x 1'700	749 x 1'880 x 1'900
Weight (kg)	355	460
Delivered with	2'455 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base	3'160 x 27 x 0.9 mm blade User's manual Service keys Adjustable length stop with scales Base
EAN	7612375534917	7612375608526
DEEE	8.80	11.5
RANGE	R	R

BANDSAWS

SX-823DGB

- 2-speed motor
- Manual or assisted bow lowering
- Right and left hand cutting by rotation of the bow
- Tape tension gauge

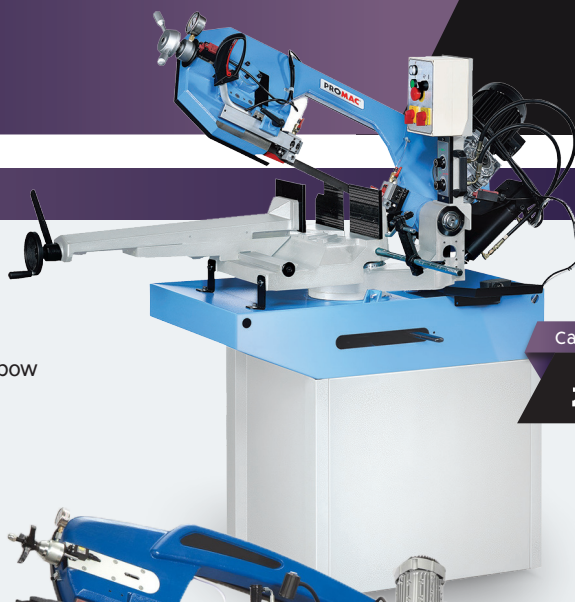

Catalogue price excl.

£4616

400V

SX-830DGSVP

- Variable speed drive 15 to 90 m / min
- Semi-automatic
- Right and left hand cutting by rotation of the bow
- Tape tension gauge



Catalogue price excl.

£11925



Made
in the Czech
Republic

400V

SX-300SAR

- Semi-automatic band saw with hydraulically controlled bow and vise movement
- hydraulically operated bow and vise movement, automatic fast up and down bow movement controlled by capacity sensor
- Adjustment of the bow lowering speed by means of a thumbwheel
- The machine is equipped with a double safety button
- for cycle start and low voltage electrical system according to CE regulations



400V



Catalogue price excl.

£12758

	SX-823DGB	SX-830DGSVP	SX-300SAR
Motor (V / kW)	400 / 1.1	400 / 2.2	400 / 1.5
Blade speed (m / min ⁻¹)	35 / 70	15 / 90	35 / 70
Blade Dimensions (mm)	2'450 x 27 x 0.9	3'160 x 27 x 0.9	3'270 x 27 x 0.9
Cutting capacities	ø 225 at 90° and 240 x 160 ø 145 at 45° and 145 x 100 ø 90 at 60° and 85 x 100 ø 145 at 45°L and 145 x 115	ø 300 at 90° and 375 x 190 ø 240 at 45° and 210 x 160 ø 155 at 60° and 150 x 150 ø 220 at 45°L and 240 x 100	ø 300 at 90° and 310 x 270 ø 250 at 45° and 140 x 250 ø 150 at 60° and 140 x 150 ø 220 at 45°L and 140 x 230
Bow mitre	60° right, 45° left	60° right, 45° left	60° right, 45° left
Vice opening (mm)	240	375	320
Working height (mm)	950	910	840
Dimensions (mm)	1'350 x 700 x 1'326	1'760 x 890 x 1'560	1'500 x 1'700 x 1'800
Weight (kg)	270	690	570
Delivered with	Saw blade Base Lubrication	Saw blade Base Lubrication	Saw blade Base Lubrication
EAN	7612375504514	7612375504767	7612375631784
DEEE	7	15	14.2
RANGE	R	R	R

MANUAL & ASSISTED BAND SAWS / SEMI-AUTO BAND SAWS BIANCO

MOD-280MM / MOD-280M



Made in Italy

- Manual band saw
- Dual speed band saw
- 45° straight cut by rotating the bow

Catalogue price excl.

£4295

MOD-280MM

Catalogue price excl.

£3466

MOD-280M-T

Now available in
in single-phase

230V
280MM

400V
280M-T



CUTTING CAPACITIES IN MM



90°	220 mm
45°	160 mm
60°	95 mm



90°	220 mm
45°	155 mm
60°	95 mm



90°	260 x 140 mm
45°	160 x 140 mm
60°	95 x 95 mm

MOD-280DAM / MOD-280DA



Made in Italy

- Manual band saw
- Dual speed band saw
- 45° straight cut by rotating the bow
- Assisted descent

Catalogue price excl.

£5410

MOD-280DAM

Catalogue price excl.

£4526

MOD-280DA-T

Now available in
in single-phase

230V
280DAM

400V
280DA-T



CUTTING CAPACITIES IN MM



90°	220 mm
45°	160 mm
60°	95 mm



90°	220 mm
45°	155 mm
60°	95 mm



90°	260 x 140 mm
45°	160 x 140 mm
60°	95 x 95 mm

	MOD-280MM / MOD-280M	MOD-280DAM/ MOD-280DA
Motor (V / kW)	230 / 0.7 - 400 / 0.7	230 / 0.7 - 400 / 0.7
Blade speed (m / min-1)	35 - 70	35 - 70
Blade Dimensions (mm)	2'455 x 27 x 0.9	2'455 x 27 x 0.9
Bow mitre	60° right	60° right
Vice opening (mm)	260	260
Working height (mm)	965	965
Dimensions (mm)	1'250 x 1'230 x 1'860	1'250 x 1'230 x 1'860
Weight (kg)	280	280
Delivered with	2'455 x 27 x 0.9» blade User's manual Service keys Adjustable longitudinal stop with scales Base	2'455 x 27 x 0.9» blade User's manual Service keys Adjustable longitudinal stop with scales Base
EAN	7612375694383 / 7612375504699	7612375694406 / 7612375504682
DEEE	7	7
RANGE	R	R

SEMI-AUTO BAND SAWS / AUTO BAND SAWS BIANCO

MOD-370SADSMS

- Semi-automatic band saw
- Capacity sensor
- Dual speed bandsaw
- Cutting at 60° right & 45° left by rotating the bow & moving the vice



Made in Italy

400V



Catalogue price excl.

£13 099

CUTTING CAPACITIES IN MM

90°	280 mm
R 45°	230 mm
L 45°	200 mm
R 60°	140 mm

90°	240 mm
R 45°	200 mm
L 45°	170 mm
R 60°	140 mm

90°	350 x 140 mm
R 45°	230 x 230 mm
L 45°	220 x 100 mm
R 60°	140 x 140 mm

MOD-370AE60° CNC

SAW WITH BAR FEED

- Automatic CNC band saw
- Cutting at 60° right by rotation of the bow, bar feed 800 mm with stroke (10'000 max)
- Control panel with CNC programmer, possibility to make different lengths in the same bar in the same cutting program

400V



Made in Italy



Catalogue price excl.

£21 517

CUTTING CAPACITIES IN MM

90°	280 mm
45°	225 mm
60°	140 mm

90°	240 mm
45°	215 mm
60°	140 mm

90°	330 x 240 mm
45°	230 x 140 mm
60°	140 x 140 mm

MOD-330A60°

- Automatic band saw with fast up and down movement of the bow controlled by a sensor
- Manual adjustment of the cutting length
- The machine is equipped with perimeter safety protection, a double safety button for cycle start-up and a low-voltage electrical switch according to CE standards.
- Low voltage electrical system according to CE standards

400V



Made in Italy



Catalogue price excl.

£15652

CUTTING CAPACITIES IN MM

90°	260 mm
45°	200 mm
60°	120 mm

90°	240 mm
45°	190 mm
60°	115 mm

90°	330 x 120 mm
45°	200 x 130 mm
60°	120 x 100 mm

	MOD-370SADSMS	MOD-370AE60° CNC	MOD-330A60°
Motor (V / kW)	400 / 1.5	400 / 1.5	400 / 1.5
Blade speed (m / min-1)	35 - 70	20 to 100 variable	34 - 70
Blade Dimensions (mm)	3'120 x 27 x 0.9	3'120 x 27 x 0.9	3010 X 27 X 0.9
Bow mitre	60° right & 45° left	60° left	60° right
Vice opening (mm)	360	330	-
Working height (mm)	830	835	835
Dimensions (mm)	1'450 x 1'650 x 1'750	2'800 x 2'050 x 1'900	3'220 x 2'050 x 1'900
Weight (kg)	480	1090	1090
Delivered with	3120 x 27 x 0.9 blade User's manual Service keys Adjustable longitudinal stop with scales Base	3'120 x 27 x 0.9» blade User's manual Service keys	
EAN	7612375504712	7612375631760	7612375694468
DEEE	12	23.63	23.63
RANGE	R	R	R

AUTOMATIC CNC R/L CUTTING

MOD.370ADS CNC 1R

- Centralized control on the console
- Automatic rotation of the right / left bow
- Vices controlled by hydraulic cylinder
- Cutting speed adjustable by frequency converter (inverter)
- Ball bearings
- Chip removal brush



400V


Catalogue price excl.

£46 897

CUTTING CAPACITIES IN MM



90°	280 mm
45° R	230 mm
45° L	200 mm
60°	140 mm



90°	240 mm
45° R	230 mm
45° L	170 mm
60°	140 mm



90°	310 x 240 mm
45° R	230 x 230 mm
45° L	220 x 100 mm
60°	140 x 140 mm



	MOD.370 ADS CNC 1R
Motor (V / kW)	400 / 1.5
Blade speed (m / min ⁻¹)	20 to 100 variable
Blade Dimensions (mm)	3'120 x 27 x 0.9
Bow mitre	60° right
Vice opening (mm)	380
Working height (mm)	835
Dimensions (mm)	2800 x 2000 x 1800
Weight (kg)	1200
Delivered with	Blade size 3'270 x 27 x 0.9 Low voltage power supply to the controls Operating instructions Service keys
EAN	7612375689624
DEEE	30
RANGE	R

BTM BANDSAW

MOD. 6141.SADS

The semi-automatic bandsaw model 6141SADS has been developed to optimally solve the problems of cutting medium and large profiles with cutting angles up to 60° to the right and left.

It is equipped with a hydraulic unit that controls the movements of the vices, displacements and locking of the bow. The operator can perform complete cutting cycles by simply pressing the hi-hand control. The design has been particularly studied to facilitate the use and the work of the operator:

Bow mounted on ball bearings for effortless rotation.

Adjustment of speed, feed and cutting pressure from the console.

Locking of the bow by hydraulic cylinder controlled from the console.

Capacity sensor to eliminate all bow stroke adjustments.

Cutting angle measurement by encoder with value displayed on the console screen.

Clamping vice block sliding on a set of circular column and consisting of a circular column and a flat base for easy movement.

Centralized control of the on the console.

Tensioning of the band by hydraulic cylinder with blade breakage safety and possibility of starting in case of insufficient tension

RUBAN DE 34 X 1,1 MM



Catalogue price excl.

£27 553

CUTTING CAPACITIES IN MM



90°	410 mm
R 45°	410 mm
L 45°	410 mm
R 60°	320 mm
L 60°	330 mm



90°	410 mm
R 45°	410 mm
L 45°	410 mm
R 60°	300 mm
L 60°	310 mm



90°	610 x 410 mm
R 45°	460 x 250 mm
L 45°	460 x 270 mm
R 60°	320 x 180 mm
L 60°	320 x 170 mm



	MOD. 6141.SADS
Motor (V / kW)	2.2
Blade speed (m / min ⁻¹)	20 to 100 variable
Blade Dimensions (mm)	5200 x 34 x 1.1
Bow Mitre	60° right & 60° left
Vice opening (mm)	620
Working height (mm)	870
Dimensions (mm)	2443 x 2523 x 2559
Weight (kg)	1400
Delivered with	5200 x 34 x 1.1 blade User's manual
EAN	7612375691986
DEEE	35
RANGE	R


BLADES

- BIMETAL M42 band saw blades with a wide range of products suitable for applications in locksmithing, boiler making and precision engineering
- A highly wear-resistant M42 cutting tool for the most common applications from cross-sections 13 x 0.65 to 34 x 1.10 and teeth 10/14 to 2/3

Pitch selection: Number of teeth per inch

PLEINS

SECTION «D» ou «L»	REGULIERE	VARIABLE
Up to 6 mm	24 teeth	10 / 14 teeth
Up to 10 mm	18 teeth	8 / 12 teeth
Up to 15 mm	14 teeth	6 / 10 teeth
From 15 to 30 mm	10 teeth	5 / 8 teeth
From 30 to 50 mm	8 teeth	4 / 6 teeth
From 50 to 80 mm	6 teeth	4 / 6 teeth
From 80 to 120 mm	4 teeth	3 / 4 teeth
From 120 to 200 mm	3 teeth	3 / 4 & 2 / 3 teeth
From 200 to 400 mm	2 teeth	2 / 3 & 1 / 2 teeth
From 300 to 800 mm	1.25 teeth	1 / 2 & 0.75 / 1.25 teeth
From 700 to 3000 mm	0.75 teeth	0.75 / 1.25 teeth

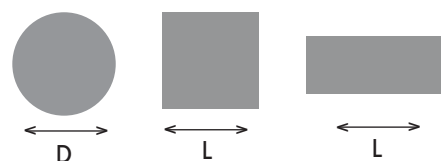

TUBES AND PROFILES

DIMENSION OF THE PIECE	20	40	60	80	100	120	150	200	300	400	500	600	700	800	900	1000	1600
THICKNESS (mm)																	
2	14	14	14	14	14	14	10/14	10/14	8/12	8/12	6/10	6/10	5/8	5/8	5/8	5/8	5/8
3	14	14	10/14	10/14	10/14	10/14	8/12	8/12	6/10	6/10	5/8	5/8	5/8	4/6	4/6	4/6	4/6
4	14	14	10/14	10/14	8/12	8/12	8/12	8/12	5/8	5/8	4/6	4/6	4/6	4/6	4/6	4/6	3/4
5	14	10/14	10/14	10/14	8/12	8/12	8/12	6/10	5/8	5/8	4/6	4/6	4/6	4/6	3/4	3/4	3/4
6	14	10/14	10/14	8/12	8/12	8/12	8/12	5/8	5/8	4/6	4/6	4/6	3/4	3/4	3/4	3/4	3/4
8	14	10/14	8/12	8/12	8/12	6/10	8/12	5/8	4/6	4/6	4/6	3/4	3/4	3/4	3/4	2/3	2/3
10		8/12	6/10	6/10	6/10	5/8	6/10	4/6	4/6	4/6	3/4	3/4	3/4	3/4	2/3	2/3	2/3
12		8/12	6/10	6/10	5/8	5/8	5/8	4/6	4/6	3/4	3/4	3/4	3/4	2/3	2/3	2/3	2/3
15		8/12	6/10	5/8	5/8	4/6	4/6	4/6	3/4	3/4	3/4	2/3	2/3	2/3	2/3	2/3	2/3
20			6/10	5/8	4/6	4/6	4/6	3/4	3/4	3/4	2/3	2/3	2/3	2/3	2/3	2/3	2/3
30				4/6	4/6	4/6	3/4	3/4	3/4	2/3	2/3	2/3	2/3	2/3	2/3	2/3	1.4/2
50						3/4	3/4	3/4	2/3	2/3	2/3	2/3	2/3	2/3	1.4/2	1.4/2	1.4/2
75								2/3	2/3	2/3	2/3	2/3	1.4/2	1.4/2	1.4/2	1.4/2	1.4/2
100									2/3	2/3	1.4/2	1.4/2	1.4/2	1.4/2	1.4/2	1.4/2	0.75/1.25
150										2/3	1.1/2	1.4/2	1.4/2	1.4/2	1.4/2	0.75/1.25	0.75/1.25
200											1.4/2	1.4/2	1.4/2	1.4/2	0.75/1.25	0.75/1.25	0.75/1.25
250												1.4/2	1.4/2	0.75/1.25	0.75/1.25	0.75/1.25	0.75/1.25
300													1.4/2	0.75/1.25	0.75/1.25	0.75/1.25	0.75/1.25
350														0.75/1.25	0.75/1.25	0.75/1.25	0.55/0.75
400															0.75/1.25	0.75/1.25	0.55/0.75
450																0.75/1.25	0.55/0.75
500																	0.55/0.75

Note: For break-in, run at 50% of normal feed speed for the first 30 minutes



SAW BLADE	REF	DESCRIPTION	PRICE /5 pieces	SAW BLADE	REF	DESCRIPTION	PRICE /5 pieces
347	2422/5	1335 X 12,7 X 0,64 6/10	£ 112,00	SX 822	2083/5	2480 X 27 X 09 3/4	£ 219,00
347	2423/5	1335 X 12,7 X 0,64 8/12	£ 112,00	SX 822	2082/5	2480 X 27 X 09 4/6	£ 219,00
347	2424/5	1335 X 12,7 X 0,64 10/14	£ 112,00	SX 822	2081/5	2480 X 27 X 09 5/8	£ 219,00
347	2425/5	1335 X 12,7 X 0,64 14/18	£ 112,00	SX 822	2080/5	2480 X 27 X 09 6/10	£ 219,00
348	2421/5	1440 X 12,7 X 0,64 6/10	£ 121,00	SX 822	2079/5	2480 X 27 X 09 10/14	£ 219,00
348	2201/5	1440 X 12,7 X 0,64 8/12	£ 121,00	SX 824	2510/5	2730 X 27 X 0,9 6/10	£ 242,00
348	2202/5	1440 X 12,7 X 0,64 10/14	£ 121,00	SX 824	2511/5	2730 X 27 X 0,9 5/8	£ 242,00
348	2203/5	1440 X 12,7 X 0,64 14/18	£ 121,00	SX 824	2512/5	2730 X 27 X 0,9 4/6	£ 242,00
MBS 56 CS	9989/5	1640 x 13 x 0,65 8/12	£ 137,00	SX 824	2513/5	2730 X 27 X 0,9 3/4	£ 242,00
MBS 56 CS	9990/5	1640 x 13 x 0,65 10/14	£ 137,00	MOD 330 all models	2379/5	3010 X 27 X 09 2/3	£ 265,00
MBS 56 CS	9992/5	1640 x 13 x 0,65 14/18	£ 137,00		2380/5	3010 X 27 X 09 3/4	£ 265,00
349 V	10050/5	1470 X 12,7 X 0,64 8/12	£ 125,00		2381/5	3010 X 27 X 09 4/6	£ 265,00
349 V	10051/5	1470 X 12,7 X 0,64 10/14	£ 125,00		2382/5	3010 X 27 X 09 5/8	£ 265,00
349 V	10052/5	1470 X 12,7 X 0,64 14/18	£ 125,00		2383/5	3010 X 27 X 09 6/10	£ 265,00
SX 815 DV	2154/5	1740 x 12,7 x 0,65 6/10	£ 145,00		2384/5	3010 X 27 X 09 8/12	£ 265,00
SX 815 DV	2155/5	1740 x 12,7 x 0,65 8/12	£ 145,00	MOD 370 all models	2390/5	3120 X 27 X 0,9 3/4	£ 274,00
SX 815 DV	2156/5	1740 x 12,7 x 0,65 10/14	£ 145,00		2391/5	3120 X 27 X 0,9 4/6	£ 274,00
SX 815 DV	2157/5	1740 x 12,7 x 0,65 14/18	£ 145,00		2392/5	3120 X 27 X 0,9 5/8	£ 274,00
351 V	2514/5	2035 X 19 X 0,90 10/14	£ 178,00		2393/5	3120 X 27 X 0,9 6/10	£ 274,00
351 V	2515/5	2035 X 19 X 0,90 8/12	£ 178,00	SX 827, EHB 270, SX 830	2129/5	3160 x 27 x 0,9 3/4	£ 278,00
351 V	2516/5	2035 X 19 X 0,90 6/10	£ 178,00		2130/5	3160 x 27 x 0,9 4/6	£ 278,00
SX 818 DV	2072/5	2080 X 19 X 0,9 10/14	£ 183,00		2131/5	3160 x 27 x 0,9 5/8	£ 278,00
SX 818 DV	2073/5	2080 X 19 X 0,9 6/10	£ 183,00		2132/5	3160 x 27 x 0,9 6/10	£ 278,00
SX 818 DV	2074/5	2080 X 19 X 0,9 5/8	£ 183,00		2135/5	3160 x 27 x 0,9 10/14	£ 278,00
SX 818 DV	2075/5	2080 X 19 X 0,9 4/6	£ 183,00	MOD 420, SX 300	2399/5	3270 X 27 X 0,9 3/4	£ 287,00
SX 818 DV	2076/5	2080 X 19 X 0,9 2/3	£ 183,00		2400/5	3270 X 27 X 0,9 4/6	£ 287,00
917 C / 917 M	9460/5	2360 X 19 X 0,65 10/14	£ 205,00		2401/5	3270 X 27 X 0,9 5/8	£ 287,00
917 C / 917 M	9461/5	2360 X 19 X 0,65 6/10	£ 205,00		2402/5	3270 X 27 X 0,9 6/10	£ 287,00
917 C / 917 M	9462/5	2360 X 19 X 0,65 5/8	£ 205,00	EHB 350	500-1002/5	3880 x 34 x 1.1mm 6/10	£ 411,00
917 C / 917 M	9463/5	2360 X 19 X 0,65 4/6	£ 205,00		500-1003/5	3880 x 34 x 1.1mm 5/8	£ 411,00
917 C / 917 M	9464/5	2360 X 19 X 0,65 3/4	£ 205,00		500-1004/5	3880 x 34 x 1.1mm 3/4	£ 411,00
SX 821 / 822 DBM /823 / MOD 280	9720/5	2455 X 27 X 0,9 10/14	£ 216,00		2412/5	4100 X 34 X 1,1 2/3	£ 443,00
ALL MODELS	9721/5	2455 X 27 X 0,9 6/10	£ 216,00		2055/5	4100 X 34 X 1,1 3/4	£ 443,00
	9722/5	2455 X 27 X 0,9 5/8	£ 216,00		2054/5	4100 X 34 X 1,1 4/6	£ 443,00
	9723/5	2455 X 27 X 0,9 4/6	£ 216,00		2053/5	4100 X 34 X 1,1 5/8	£ 443,00
	9724/5	2455 X 27 X 0,9 2/3	£ 216,00	MOD-6141	2417/5	5200 x 34 x 1.1 2/3	£ 560,00
	2354/5	2455 X 27 X 0,9 8/12	£ 216,00		2418/5	5200 x 34 x 1.1 3/4	£ 560,00
					2419/5	5200 x 34 x 1.1 4/6	£ 560,00
					2420/5	5200 x 34 x 1.1 5/8	£ 560,00

On request: sold in single and 2-piece tapes
Please contact us for other dimensions and sections in stock



REF	DESCRIPTION	PRICE
2146	SINGLE ROLLER SERVER D50 X 400 70 KG Max H 580/950	£ 78,00
2147	5 ROLLER SERVER D50 X 400 70 KG Max H 640/950	£ 118,00
2148	1 ROLLER SERVER reversible 7 Ball D35 X 320 50 KG Max H 620/950	£ 87,00
HRS-V	V Roller Server	£ 145,00
	heavy duty trolley	
	servante charge lourde	
2017 C	FEEDING TABLE 2 ML W 320 MM H 630/1000 7 ROLLERS D 60 MAX LOAD 350 KG ML	£ 696,00
2020	OUT FEED TABLE WITH MANUAL STOP 3 ML W 320 MM H 630/1000 12 ROLLERS D 60 MAX LOAD 350 KG ML	£1263,00
2020D3	MATERIAL STOP with digital reading of 3 ml sold without table	£1164,00
2020-D6	OUTPUT TABLE WITH DIGITAL STOP 6 ML W 320 MM H 630/1000 12 ROLLERS D 60 MAX LOAD 350 KG ML sold with table	£3722,00



2017C



2020



202003



HRS-V




2146



2147



2148



BIANCO TABLES	
RMT1/	Input and output table 1 ML
RMT2/	Input and output table 2 ML
RMT3/	Input and output table 3 ML
RMT4/	Input and output table 4 ML
RMT5/	Input and output table 5 ML
RMT6/	Input and output table 6 ML
RMT2R/	Output table with manual stop on scale 2 ML
RMT3R/	Output table with manual stop on scale 3 ML
RMT4R/	Output table with digital readout manual stop 4 ML
RMT5R/	Output table with digital readout manual stop 5 ML
RMT6R/	Output table with digital readout manual stop 6 ML
RMT2V/	Output table with steering wheel display 2 ML
RMT3V/	Output table with steering wheel display 3 ML
RMT4V/	Output table with steering wheel display 4 ML
RMT5V/	Output table with steering wheel display 5 ML
RMT6V/	Output table with steering wheel display 6 ML
RMT2M/	Outfeed table with motorised cutting stop 2 ML
RMT3M/	Outfeed table with motorised cutting stop 3 ML
RMT4M/	Outfeed table with motorised cutting stop 4 ML
RMT5M/	Outfeed table with motorised cutting stop 5 ML
RMT6M/	Outfeed table with motorised cutting stop 6 ML

Available in 4 widths 280 / 330 / 370 / 420
Price on request



METAL LATHES


BD 3-M

- Square tool turret
- 3-jaw chuck 50 mm

230V

Catalogue price excl.

£524

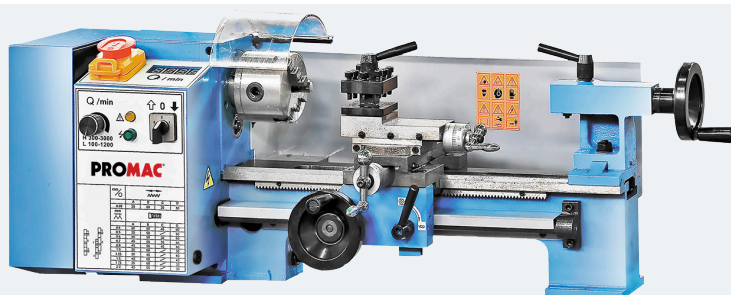

BD 7-M

- Square tool turret
- Digital speed display

230V

Catalogue price excl.

£939


PBD 2140V

- Digital speed display
- Digital display of the cross slide movement

Catalogue price excl.

£2 021

230V

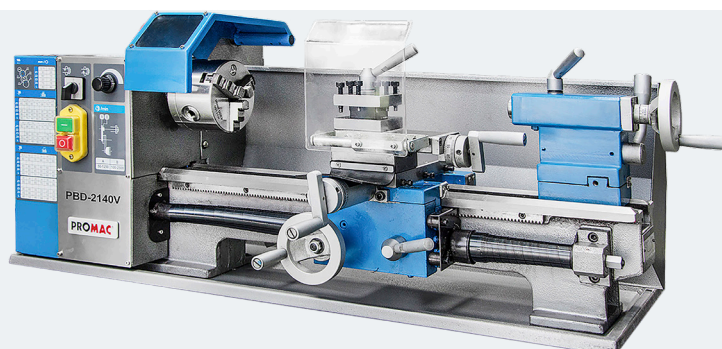

	BD 3-M	BD 7-M	PBD 2140V
Motor (V / kW)	230 / 0.15	230 / 0.35	230 / 0.6
Centre height (mm)	50	90	105
Centre distance (mm)	145	300	400
Swing over bed (ø mm)	100	180	210
Spindle bore (mm)	10	20	21
Morse taper of headstock	-	CM3	CM3
Speed range (min-1)	100 – 3'800, variable	100 – 3'000, variable	50 – 1'250 / 100 – 2'500, variable
Cross slide stroke (mm)	50	65	100
Top slide stroke (mm)	45	50	75
Metric thread range (mm)	-	0.4 – 2.0	0.25 – 3.0 (14 threads)
Thread range in inches (TPI)	-	12 – 52	8 – 44 (12 threads)
Feed rate range. (mm / t)	-	0.09	0.11 & 0.2 (2 advances)
Morse taper of tailstock	M14 x 1	CM2	CM2
Spindle stroke tailstock (mm)	23	40	40
Max. tool size (mm)	8	8	10
3-jaw chuck (mm)	50	50	100
Dimensions (mm)	440 x 270 x 210	750 x 230 x 300	900 x 460 x 500
Weight (kg)	14.5	43	94
Delivered with	Tool holder 3-jaw chuck 50 mm Service spanners	4 position tool holder 3-jaw chuck 100 mm Fixed point CM2 and CM3	4 position tool holder 3-jaw chuck 100 mm Fixed point CM2 and CM3 Rotating point CM2 Slot plate 170 mm
EAN	7612375503852	7612375503869	7612375520590
DEEE	0.36	1.08	2.35
RANGE	P	P	I

METAL LATHES

PBD 2555V

- Delivered on a base and with LED lighting
- Integrated lubrication system
- Variable speed – forward / reverse spindle rotation

230V



Catalogue price excl.

£2712

PBD 2870

- Automatic longitudinal feed –
- cast iron frame
- Delivered on base, with guard, chuck
- chuck, lighting and lubrication system
- Integrated lubrication system

230V



Catalogue price excl.

£3254

PBD 3069

- Automatic longitudinal feed
- Cast iron frame
- Integrated lubrication

230V



Catalogue price excl.

£4090

	PBD 2555V	PBD 2870	PBD 3069
Motor (V / kW)	230 / 1.1	230 / 1.1	230 / 1.1
Centre height (mm)	125	140	150
Centres distance (mm)	550	700	750
Swing over bed (ø -mm)	250	280	300
Spindle bore (mm)	26	26	38
Morse taper of headstock	CM4	CM4	CM5
Speed range (min-1)	50 – 2'500, variable	150 – 2'000, variable	150 – 2'000, variable
Cross slide stroke (mm)	110	160	170
Top slide stroke (mm)	70	60	90
Metric thread range (mm)	0.2 / 4.0 (21 threads)	0.2 – 4.0 (21 threads)	0.2 / 0.4 (21 threads)
Thread range in inches (TPI)	8 – 56 (21 threads)	8 – 56 (21 threads)	8 – 56 (21 threads)
feed rate range (mm / t)	0.07 / 0.4 (6 advances)	0.07 / 0.4 (6 advances)	0.085 / 0.13 / 0.17 / 0.21 / 0.35 / 0.40 / 0.50 / 0.83
Morse taper of tailstock	CM2	CM2	CM3
Spindle stroke tailstock (mm)	65	85	80
Max. tool size (mm)	12	12	16
3-jaw chuck (mm)	125	125	160
Dimensions (mm)	1'200 x 590 x 480	1'390 x 700 x 1'285	1'400 x 700 x 1'400
Weight (kg)	178	282	357
Delivered with	4 position tool holder 3-jaw chuck 100 mm Fixed point CM2 Rotating tip CM2	4 position tool holder 3-jaw chuck 125 mm Fixed point CM2 Rotating tip CM2	4 position tool holder 3-jaw reversible chuck 160 mm CM2 and CM3 rotating tips Base
EAN	7612375519914	7612375520606	7612375519921
DEEE	4.45	7.05	8.93
RANGE	I	I	R

METAL LATHES

GHB-1330-FT

- Servo chuck protector
- Foot brake
- Center distance 760 mm
- Halogen work light
- Original DRO
- Integrated lubrication

400V



Catalogue price excl.

£6336

GHB-1340A-FT

- Servo chuck protector
- Foot brake
- Distance between tips 1'015 mm
- Halogen work light
- Original DRO
- Integrated lubrication

400V



Catalogue price excl.

£6949

BD-947VA

- Servo chuck protector
- Foot brake
- Distance between tips 690 mm
- Halogen work light
- Equipped with Quick Change
- Integrated lubrication

230V



Catalogue price excl.

£6701

	GHB-1330-FT	GHB-1340A-FT	BD-947VA
Motor (V / kW)	400 / 1.5	400 / 1.5	230 / 1.5
Centre height (mm)	165	165	140
Centres distance (mm)	760	1'015	690
Swing over bed (ø -mm)	330	330	300
Spindle bore (mm)	38	38	38
Morse taper of headstock	CM5	CM5	CM5
Speed range (min-1)	70 – 2'000	70 – 2'000	50 – 1'000 & 100 – 2'000
Cross slide stroke (mm)	160	160	170
Top slide stroke (mm)	68	68	75
Metric thread range (mm)	23 / 0.45-10	23 / 0.45-10	14 / 0.25 – 2.5
Thread range in inches (TPI)	3 – 1 / 4 – 80	3 – 1 / 4 – 80	9 / 12 – 80
feed rate range (mm / t)	0.037 – 0.989	0.037 – 0.989	0.03 – 0.3
Morse taper of tailstock	CM3	CM3	CM3
Spindle stroke tailstock (mm)	95	95	80
Spindle stroke tailstock (mm)	16	16	16
3-jaw chuck (mm)	160	160	160
Dimensions (mm)	1'650 x 760 x 1'200	1'905 x 760 x 1'200	1'500 x 750 x 730
Weight (kg)	600	650	215
Delivered with	3-jaw reversible chuck 160 mm Slotted table 300 mm Fixed steady rest (6 – 67 mm) / Steady rest (6 – 70 mm) Square turret / pitch comparator 2 dry points CM3 and reduction CM5 / CM3	3-jaw reversible chuck 160 mm Slotted table 300 mm Fixed steady rest (6 – 67 mm) / Steady rest (6 – 70 mm) Square turret / pitch comparator 3 dry points CM3 and reduction CM5 / CM3	3-jaw reversible chuck 160 mm Quick Change turret 1 CM3 and 1 CM2 dry tip
EAN	7612375531152	7612375531169	7612375517378
DEEE	15	16.25	5.37
RANGE	R	R	R

METAL LATHES

GH-1440K-T

- 400 V metal lathe with 12-speed mechanical gearbox
- 3-axis viewing system
- 1'016 mm distance between centers
- Servo chuck guard, foot brake and broken bed (508 mm)
- Lighting and lubrication system

400V




Catalogue price excl.

£9481

GH-2680ZH-T

- 400 V metal lathe with 12-speed mechanical gearbox
- 3-axis viewing system
- 1'016 mm distance between centers
- Servo chuck guard, foot brake and broken bed (508 mm)
- Lighting and lubrication system

400V

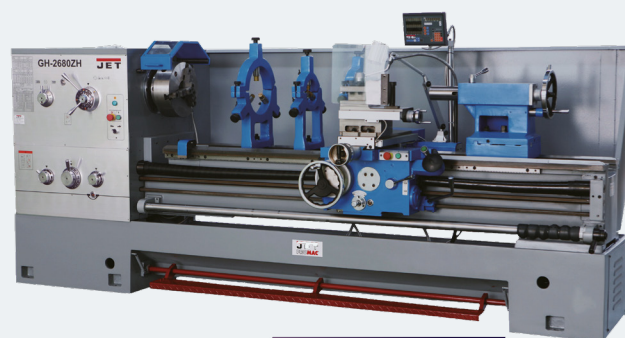

Catalogue price excl.

£25 695

	GH-1440K-T	GH-2680ZH-T
Motor (V / kW)	400 / 2.2	400 / 7.5
Centre height (mm)	178	330
Centre distance (mm)	1015	2030
Swing over bed (ø-mm)	360	660
Spindle bore (mm)	38	105
Morse taper of headstock	CM5	CM7
Speed range (min-1)	40 – 1'800 (12 speed)	36 – 1'600, variable
Cross slide stroke (mm)	175	310
Top slide stroke (mm)	98	145
Metric thread range (mm)	0.4 – 7 (37 threads)	1 – 14
Thread range in inches (TPI)	4 – 56 (28 threads)	2– 28
Feed rate range (mm / t)	0.043 – 0.653 (39 advances)	0.063 – 2.52
Morse taper of tailstock	CM3	CM5
Spindle stroke tailstock (mm)	120	150
Max. tool size (mm)	16	25
3-Jaw chuch (mm)	160	325
Dimensions (mm)	1'930 x 765 x 1'250	3'500 x 1'100 x 1'450
Weight (kg)	959	3870
Delivered with	3-jaw reversible chuck 160 mm 2 fixed tips CM3 and reduction CM5 / CM3	
EAN	7612375503913	7612375503951
DEEE	23.98	96.75
RANGE	R	R

SPECIAL METAL LATHES WITH QUICK CHANGE

GH-1640ZX-T-QC

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened grey cast iron prismatic base
- All gears rotate in a permanent
- in an oil bath
- Equipped with Quick Change

400V

Catalogue price excl.

£18 899



GH-1860ZX-T-QC

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened grey cast iron prismatic base
- All gears rotate permanently in an oil bath
- in an oil bath
- Equipped with Quick Change

400V

Catalogue price excl.

£21 509



GH-1880ZX-T-QC

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened grey cast iron prismatic base
- hardened
- All gears rotate permanently in an oil bath
- in an oil bath
- Equipped with Quick Change

400V

Catalogue price excl.

£23 454



GH-2060ZH-T-QC

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened prismatic grey cast iron base
- All gears run permanently in an oil bath
- Equipped with Quick Change

Catalogue price excl.

£22 348

400V



	GH-1640ZX-T-QC	GH-1860ZX-T-QC	GH-1880ZX-T-QC	GH-2060ZH-T-QC
Motor (V / kW)	400 / 5.6	400 / 5.6	400 / 5.6	400 / 7.5
Centre height (mm)	203	230	230	250
Centre distance (mm)	1'015	1'524	2'032	1'530
Swing over bed (ø-mm)	406	460	460	500
Spindle bore (mm)	80	80	80	80
Morse taper of headstock	CM7	CM7	CM7	CM7
Speed range (min-)	25 – 1'800	25 – 1'800	25 – 1'800	25 – 1'800
Cross slide stroke (mm)	228	228	228	310
Top slide stroke (mm)	130	130	130	145
Metric thread range (mm)	0.5 – 20 (24 threads)	0.5 – 20.0 (24 threads)	0.5 – 20 (24 threads)	1 – 224
Thread range in inches (TPI)	72 – 1/8 (61 threads)	72 – 1"5 / 8 (61 threads)	72 – 1/8 (61 threads)	28" – 1/8"
Feed rate range (mm / t)	0.038 – 2.3 (122 advances)	0.038 – 2.3 (122 advances)	0.038 – 2.3 (122 advances)	0.063 – 6.43
Morse taper of tailstock	CM4	CM5	CM5	CM5
Spindle stroke tailstock (mm)	124	124	124	150
Max. tool size (mm)	25 x 25	25 x 25	25 x 25	25 x 25
3-Jaw chuch (mm)	250	250	250	250
Dimensions (mm)	2'462 x 1'016 x 1'220	2'960 x 1'016 x 1'241	3'458 x 1'016 x 1'241	2'980 x 1'280 x 1'410
Weight (kg)	2120	2120	2'989	3000
Delivered with	3-axis screw / Lubrication system / Foot brake	3-axis screw / Lubrication system / Foot brake	3-axis screw / Lubrication system / Foot brake	3-axis screw / Lubrication system / Foot brake
EAN	7612375691740	7612375691757	7612375691764	7612375691771
DEEE	53	65.70	74.70	75
RANGE	R	R	R	R

GRINDING WHEEL

JBG 150-M

230V

- Equipped with a switch with coil
- Anti-start and emergency stop
- Adjustable tool holders and plexi protectors



Catalogue price excl.

£ 170

316E

230V

- Equipped with a switch with coil
- Anti-start and emergency stop
- Adjustable tool holders and plexi protectors



Catalogue price excl.

£ 220

stand 9399



Catalogue price excl.

£ 197

324E / 325E

- Equipped with a switch with coil
- Anti-start and emergency stop
- Adjustable tool holders and plexi protectors
- 324E (230 V) / 325E (400 V)



230V
324E

400V
325E

Catalogue price excl.

£ 351

stand 9398



Catalogue price excl.

£ 286

IBG-8VS

230V

- Grinding wheel / variable speed grinding wheel
- From 900 to 3600 RPM
- 3 direct speeds 900 / 1'800 / 3'600
- + 100 RPM pulses between each
- Ideal for steel, stainless steel and other non-ferrous



Catalogue price excl.

£ 507

**Uniquement
pour IBG-8VS**

	JBG 150-M	316E	324E (230V) 325E (400V)	IBG-8VS
Motor (V / kW)	230 / 0.26	230 / 0.30	230 / 0.45 – 400 / 0.45	230 / 0.75
Dimensions wheel 1 (mm)	150 x 20 x 12.7 – G36	150 x 25 x 20 – G36	200 x 25 x 20 – G36	200 x 25 x 16
Dimension wheel 2 (mm)	150 x 20 x 12.7 – G60	150 x 25 x 20 – G60	200 x 25 x 20 – G60	–
Speed (min-1)	2'850	2'850	2'850	900 to 3'600 (3 direct direct: 900 / 1'800 / 3'600 + pulses of 100 Rpm between each)
Suction outlet (ø-mm)	–	–	2 sorties: 36	1 x 63.5
Dimensions (mm)	400 x 200 x 265	400 x 190 x 270	480 x 300 x 290	450 x 250 x 570
Weight (kg)	10	12	21	30
Delivered with	2 grinding wheels + plexi protectors + tool holder Lighting	2 grinding wheels + plexi protectors + tool holder	2 grinding wheels + protectors plexi + tool holder	Grinding wheel G36 and G60
EAN	7612375504095	7612375600346	7612375600360 / 7612375600377	7612375504750
DEEE	0.25	0.3	0.53	0.75
RANGE	P	P	P	I

GRINDING

322BE1-BP

- Grinding wheel/belt grinder, ball bearing motor
- Belt grinding surface 105 x 250 mm
- Switch with anti restart coil
- Adjustable tool holder
- Suction outlet $\varnothing$ 36 mm

400V

Catalogue price excl.

£ 696



323BF-BP

- Belt/brush grinder, motor mounted on ball bearings
- Anti-restarting spool sanding surface
- Adjustable tool holder

400V

Catalogue price excl.

£ 971



Stand 9399

PROMAC

Prix catalogue HT

£ 197



324BP

- Grinding machine, motor mounted on ball bearings
- Switch with anti restart coil
- Adjustable tool holder
- Mushroom switch
- Suction outlet in $\varnothing$ 36 mm and $\varnothing$ 100 mm

230V

Catalogue price excl.

£ 402



325BP

- Grinding machine, motor mounted on ball bearings
- Switch with anti restart coil
- Adjustable tool holder
- Mushroom switch
- Suction outlet in $\varnothing$ 36 mm and $\varnothing$ 100 mm

400V

Catalogue price excl.

£ 402



321PF

- All metal polishing and finishing machine
- Scotch-Brite non-woven material resists clogging and regularly exposes new abrasive grains for continuous cutting performance
- Mushroom switch

400V

Catalogue price excl.

£ 500



	322BE1-BP	323BF-BP	324BP	325BP	321PF
Motor (V / kW)	400 / 0.55	400 / 1.3	230 / 0.45	400 / 0.45	400 / 0.5
Dimension D x W x B	200 x 25 x 20	200 x 19 x 16	200 x 25 x 20	200 x 25 x 20	200 x 50 x 15.88
Dimension disc (mm)	175 x 20 x 12	100 x 1100	175 x 20 x 12	175 x 20 x 12	-
Dimension belt (mm)	100 x 1000	175 x 20 x 12	200 x 25 x 16	200 x 25 x 16	-
Rotation speed (tr/min)	2850	2850	2850	2850	2850
Belt speed (m-s)	15	24	-	-	-
Dimensions (mm)	520 x 280 x 630	380 x 395 x 810	690 x 310 x 340	690 x 310 x 340	600 x 210 x 270
Weight (kg)	27	37.5	24	24	19.5
EAN	7612375631470	7612375691931	7612375631487	7612375691924	7612375631494
DEEE	0.32	0.32	0.32	0.32	0.32
RANGE	P	P	P	P	P

GRINDING WHEEL / BRUSH GRINDER

330D

- Equipped with a switch with coil
- Anti-start
- and emergency stop
- Adjustable tool holders

400V

Catalogue price excl.

£1460



Stand 9399

Catalogue price excl.

£ 197



324F

230V

- 230V
- Ball bearing motor shafts
- Switch equipped with anti restart coil
- Plexiglas guards and tool holders



Catalogue price excl.

£ 351

325F

- Ball bearing motor shafts
- Switch equipped with an anti-restart coil
- Plexiglas guards and tool holders

400V

Catalogue price excl.

£ 351



326F

- Ball bearing motor shafts
- Switch equipped with an anti-restart coil
- Plexiglas guards and tool holders

400V

Catalogue price excl.

£ 882



	330D	324F	325F	326F
Motor (V / kW)	400 / 1.5	230 / 0.45	400 / 0.45	400 / 0.75
Dimensions wheel 1 (mm)	300 x 50 x 25 - G36 / G60	200 x 25 x 20	200 x 25 x 20	250 x 38 x 20 - G36
Dimension wheel 2 (mm)	-	200 x 19 x 16	200 x 19 x 16	250 x 20 x 25,4
Speed (min ⁻¹)	1'420	2'850	2'850	2'850
Suction outlet (ø-mm)	2 outlets : 36	2 outlets : 36 & 100	2 outlets : 36 & 100	2 outlets : 36 & 100
Dimensions (mm)	740 x 475 x 1200	490 x 300 x 290	490 x 300 x 290	610 x 440 x 380
Weight (kg)	105	21	21	44
Delivered with	2 grinding wheels + plexi protectors + tool holder Base included	Gr 36 wheel + 1 brass-plated steel brush + Plexiglas protectors and tool holders		
EAN	7612375608571	Plexiglas protectors and	7612375608915	7512375534948
DEEE	2.63	User's manual	0.53	1.10
RANGE	P	P	P	P

WHEEL & BELT GRINDING

315BE1

- Ball bearing motor shafts
- Switch equipped with an anti-restart
- anti-starting coil
- Plexiglas guards and tool holders
- Thermal protection against overloads
- Emergency stop

230V



Catalogue price excl.

£ 489

322BE1

- Ball bearing motor shafts
- Switch equipped with anti restart coil
- Plexiglas guards and tool holders

400V



Catalogue price excl.

£ 647

Stand 9399



Catalogue price excl.


£ 197

323BF

BELT & BRUSH

- Belt and brush grinder
- Sanding surface 105 x 250 mm

400V

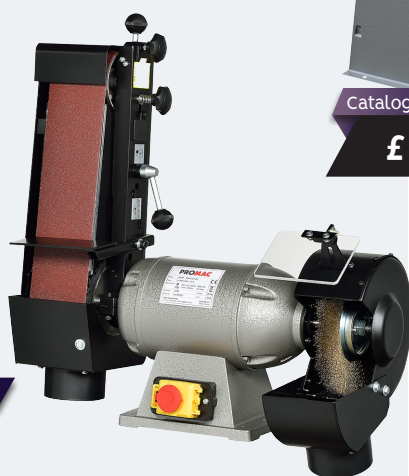

Catalogue price excl.

£ 885

326BE

- Ball bearing motor shafts
- Switch with coil
- anti-starting device
- Plexiglas guards and tool holders
- Emergency stop



SUPPLIED WITH

Catalogue price excl.

£1312

400V

	315BE1	322BE1	323BF	326BE
Motor (v / kW)	230 / 0.30	400 / 0.55	400 / 1.3	400 / 1.4
Dimensions belt (mm)	50 x 1'000	100 x 1'000	100 x 1'100	100 x 1'150
Dimension wheel 2 (mm)	150 x 25 x 20	200 x 25 x 20	200 x 19 x 16	250 x 38 x 25.4
Speed (min-¹)	2'850	2'850	2'850	2'850
Belt speed (m / s)	15	16	24	30
Suction outlets (ø-mm)	36	2 outlets : 36	100 / 100	1 outlet : 100 / 1 outlet : 36
Dimensions (mm)	450 x 180 x 580	500 x 280 x 630	660 x 500 x 580	660 x 500 x 580
Weight (kg)	14	27	37.5	50
Delivered with	Grinding wheel 36 grain 100 grain belt	Grinding wheel 36 grain 100 grain belt	Wire brush. 200 x 19 x 16 G100 Grit Strip	Grinding wheel 36 grain 100 grain belt Base
EAN	7612375600353	7612375600407	7612375631807	7612375600452
DEEE	0.35	0.68	0.93	1.25
RANGE	P	P	P	P

TUBE NOTCHER / BELT GRINDER / BELT SANDER

336-BG

- Sander / Notcher
- Reversing the direction of travel
- 380 x 100 mm sanding surface
- Tilting notching system from 0° to 60°



400V

Sold with 7 mandrels

Catalogue price excl.

£2 437

335E

- With rubber wheel
- Dust collection device
- Tilt adjustable sanding arm
- Belt protection
- Thermal protection
- With 80 grain belt



400V

Catalogue price excl.

£1 179


331C

331Y

- With rubber wheel
- With belt protection
- Thermal overload protection
- With 100 grain belt
- Base option 9867 (Range A)

400V
331C

230V
331Y

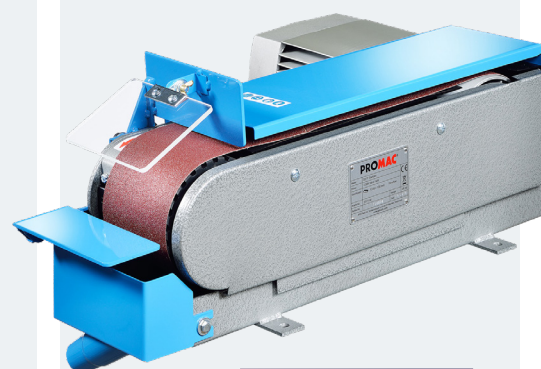


Catalogue price excl.

£ 597

	336-BG	335E	331C 331Y
Motor (V / kW)	400 / 2.4, 3.0	400 / 2.2	400 / 0.73
Belt dimension (mm)	100 x 2'000	75 x 2'000	100 x 1220
Surface grinding	-	75 x 660	100 x 320
Speed (min ⁻¹)	2 speed : 1'420 & 2'850	-	-
Belt speed (m / s)	15 for stainless steel and 30 for steel	30	19
Suction for outlet (ø-mm)	75 / 75	-	-
Dimensions (mm)	550 x 310 x 580	950 x 430 x 1'050	600 x 360 x 260
Weight (kg)	155	85	27
Delivered with	G80 grain tape 7 rolls: 20, 26, 32, 42, 48, 60 and 76	Strip 100 x 1'220 mm, G100 Plexiglass protection User's manual	Strip 100 x 1'220 mm, G100 Plexiglass protection User's manual
EAN	7612375631791	7612375528510 / 7612375608151	7612375528510 / 7612375608151
DEEE	3.88	0.6625	0.6625
RANGE	I	P	P

REF	DESCRIPTION	PRICE EX
9399	Stand for grinder	£ 197,00
300 Z	Stand with suction	£ 877,00
Diameter x Width x Bore x Grain		
2098	Wheel 150 x 20 x 20 x gr 46	£ 28,00
2099	Wheel 150 x 20 x 20 x gr 60	£ 28,00
9191	Wheel 150 x 25 x 20 x gr 36	£ 42,00
9197	Wheel 150 x 25 x 20 x gr 37	£ 42,00
9340	Wheel 200 x 25 x 20 g 36	£ 61,00
9341	Wheel 200 x 25 x 20 g 60	£ 61,00
10034	Wire brush D 200 X 20 X 16	£ 27,00
9950	Wheel 250 x 38 x 25,4 G 36	£ 120,00
10040	Wire brush D 250 X 20 X 25,4	£ 42,00
9772	Wheel 300 x 50 x 25,4 G 36	£ 140,00
9773	Wheel 300 x 50 x 25,4 G 60	£140,00
Sanding belt Width X Length X Grain (per 5 belts)		
9306	50 X 1000 G 60	£ 28,00
9307	50 X 1000 G 80	£ 28,00
9308	50 X 1000 G 100	£ 28,00
9309	50 X 1000 G 120	£ 28,00
9310	50 X 1000 G 180	£ 28,00
9346	100 x 1000 g 60	£ 61,00
9347	100 x 1000 g 80	£ 61,00
9348	100 x 1000 g 100	£ 61,00
9349	100 x 1000 g 120	£ 61,00
9350	100 x 1000 g 180	£ 61,00
9945	100 X 1160 G 80	£ 63,00
9946	100 X 1160	£ 63,00
9947	100 X 1160	£ 63,00
9948	100 X 1160	£ 63,00
9949	100 X 1160	£ 63,00
9869	100 X 1220 G 60	£ 72,00
9870	100 X 1220 G 80	£ 72,00
9871	100 X 1220 G 100	£ 72,00
9872	100 X 1220 G 120	£ 72,00
9873	100 X 1220 G 180	£ 72,00
9829	75 x 2000 g 60	£ 72,00
9830	75 x 2000 g 80	£ 72,00
9831	75 x 2000 g 100	£ 72,00
9832	75 x 2000 g 120	£ 72,00
9833	75 x 2000 g 150	£ 72,00
9834	75 x 2000 g 180	£ 92,00
2213	100 x 2000 g 24	£ 75,00
2214	100 x 2000 g 40	£ 75,00
2215	100 x 2000 g 60	£ 75,00
2216	100 x 2000 g 80	£ 75,00
2231	Wheel Dresser	£ 37,00



DRILL GRINDERS

JDG-0313

- Very easy to use
- Simple and economical for sharpening HSS or HSS-E twist drills (grinding wheel for carbide drills optional)
- Allows sharpening of the drill tip and thinning of the drill core
- Capacity $\varnothing$ 3 mm to 13 mm
- No previous sharpening experience required – fast, clean and precise work
- Easy to move with carrying handle

230V



Catalogue price excl.

£ 509

JDG-0332

- Tip angle 85° to 140° power 250 w
- Simple and economical for sharpening twist drills
- HSS or HSS-E type (grinding wheel for carbide drills optional)
- Possible operations: standard sharpening, cross sharpening
- core thinning and lip correction
- Capacity $\varnothing$ 2.1 mm to 32 mm
- No previous experience of sharpening required –
- fast, clean and precise work

Catalogue price excl.

£1 876



230V

	JDG-0313	JDG-0332
Motr (V / kW)	230 / 0.12	230 / 0.25
Cutting angle	100 – 135°	95° ~ 135° / 85° ~ 140°
Diameter of sharpenable drills (mm)	3 to 13	2.1 to 32
Speed (min ⁻¹)	4'400	4'400
Dimensions (mm)	320 x 180 x 190	400 x 260 x 300
Weight (kg)	9	36
Delivered with	CBN grinding wheel (for HSS) (3 – 12 mm) x 1, size: 12.7 x 78 x 10 mm Collets: $\varnothing$ 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 Collet chuck: ($\varnothing$ 3 – 14)	CBN wheel (for HSS) Collets: ER20: $\varnothing$ 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12 ER40: $\varnothing$ 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32
Option	Grinding wheel for sharpening	Grinding wheel for carbide drills
EAN	7612375631852	7612375631869
DEEE	0.22	0.9
RANGE	I	P

ELECTRIC HOISTS

990G

Catalogue price excl.

£ 190

991G

Catalogue price excl.

£ 316

992G

Catalogue price excl.

£ 615

- Intermittent use hoist S3 20 % 10 min
- Remote control with a length of about 1.80 m



**Options: trolley and bracket
(ref : 992-100 and 9931)**



	990G	991G	992G
Motor (V / kW)	230 / 0.50	230 / 0.90	230 / 1.60
Lifting capacities (kg)	125 / 250	250 x 500	500 / 999
Lifting height (m)	12 / 6	12 / 6	11 / 5.5
Lifting speed (m / min)	8 / 4	8 / 4	8 / 4
Cable ø (mm)	3	4.2	5.6
Weight (kg)	11	17	31
Delivered with	Reeving pulley - rider 45 x 45 mm for fixed use - remote control	Reeving pulley - rider 45 x 45 mm for fixed use - remote control	Reeving pulley - rider 45 x 45 mm for fixed use - remote control
EAN	7612375601244	7612375601220	7612375600865
DEEE	0.28	0.43	0.78
RANGE	P	P	P

CHAIN HOISTS

995A

Catalogue price excl.

£ 163

- Mobile chain winch and manoeuvrable for various uses indoors and outdoor use
- Low installation height
- low with minimal weight



996A

Catalogue price excl.

£ 185

997A

Catalogue price excl.

£ 390

994A



**Options : trolley
(ref : 996-100A at 997-200A)**

Catalogue price excl.

£ 89



	995A	996A	997A	994A
Lifting capacities (kg)	500	1'000	2'000	up to 250
Hauteur de levage (m)	2.8	2.8	2.8	1
Lifting height (m)	3	3	3	1
ø of the chain links (mm)	6.3	6.3	8	4
Height loss (mm)	305	340	420	290
Weight (kg)	10.3	11.1	19.7	2
EAN	7612375508567	7612375508574	7612375600797	7612375508550
DEEE	-	-	-	-
RANGE	P	P	P	P

FOLDING MACHINES

KFL 10 / 15

- Manual sheet metal bending machine
- Useful length 1'020 mm
- Maximum thickness 1.50 mm
- Solid plate



Catalogue price excl.

£1 735

KFS-12 / 20

- Manual sheet metal bending machine
- Useful length 1'270 mm
- Maximum thickness 2.0 mm
- Segmented finger plate



Catalogue price excl.

£3 684

KFS 20 / 20

- Manual sheet metal bendier
- Working length 2'020
- Max. thickness 2.0 mm
- Segmented finger plate

Catalogue price excl.

£10 435



Other models on request



	KFL 10 / 15	KFS-12 / 20	KFS 20 / 20
Working length (mm)	1'020	1'270	2'020
Thickness (400N / mm ₂)	1.5	2	2
Max. leaf opening height (mm)	33	47	122
Clamping apron	Full	Segmented fingers	Segmented fingers
Angle stop	150°	135°	135°
Dimensions (mm)	1'188 x 685 x 1'048	1'600 x 900 x 1'175	2'567 x 560 x 1'265
Weight (kg)	115	340	1020
Delivered with	User's manual	User's manual	User's manual
EAN	7612375631876	7612375631883	7612375631890
RANGE	I	I	I

PLATE ROLLERS

CY90-10 / 3M

- Manual sheet metal rolling machine
- Useful length 1'050 mm
- Maximum thickness 3.0 mm
- Conical rolling device
- Manual roller adjustment



Catalogue price excl.

£5 342

CY90-10 / 3

- Motorised sheet metal roller
- Useful length 1'050 mm
- Max. thickness 3.0 mm
- Conical rolling device
- Control panel



Catalogue price excl.


£7 883

CYL -140-20 | 4.5 Motorised

- Motorised sheet metal roller
- Useful length 2'050 mm
- Maximum thickness 4.5 mm
- Conical rolling device
- Manual roller adjustment
- Control panel

Catalogue price excl.

£14 445

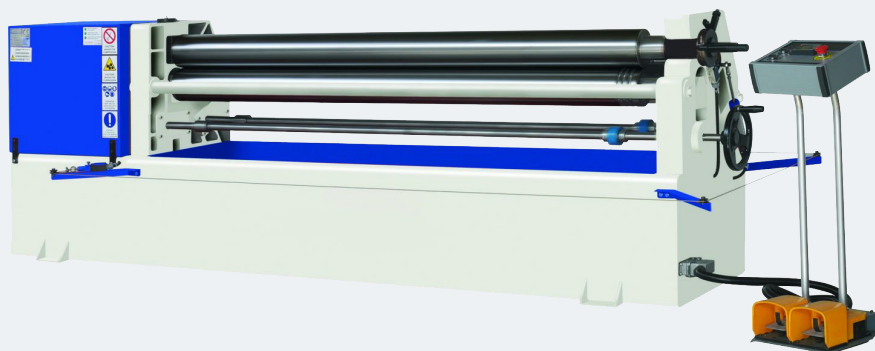

other models on request



	CY90-10 / 3M	CY90-10 / 3	CYL -140-20 4.5 Motorisée
Working length (mm)	1'050	1'050	2'050
Epaisseur Roulage (mm)	3.3	3.3	4.5
Rolling thickness (mm)	3	3	4
Roller diameter (mm)	90	90	140
Motor power (kW)	-	1.1	2.2
Driving speed (M / mn)	-	5	5.7
Dimensions (mm)	2'100 x 850 x 1'130	2'100 x 850 x 1'130	3'240 x 900 x 1'200
Weight (kg)	490	570	1'530
Delivered with	User's manual	User's manual	User's manual
EAN	7612375631906	7612375631913	7612375631920
DEEE	-	14.25	38.25
RANGE	I	I	I

ROLL BENDERS

PB 40-3

- 3-roll bending machine
- 3 drive rollers
- Manual adjustment of the pressure roller

400V

Catalogue price excl.

£4 753

Supplied with a set of standard rollers

PB 50-3

- 3-roll bending machine
- 3 drive rollers
- Manual adjustment of the pressure roller
- Foot pedal control
- Digital display of the depth of cut

400V

Catalogue price excl.

£6 060

Tube rollers are optional

PB 50-3H

- 3-roller bending machine
- 3 drive rollers
- Hydraulic adjustment of the pressure roller
- by manual pump
- Foot pedal control
- Digital display of the

400V

Catalogue price excl.

£9 098

ETM-60

TUBE BENDING MACHINE

- Tube & pipe bender
- Number of programs 40 x 5 bends
- Max. capacity 60 x 4 mm or 2 inch x 4 mm
- Digital control panel & external foot switch
- Machine delivered on base without form or counter form

400V

Catalogue price excl.

£10 439

Delivered bare / optional form and counter forms

	PB 40-3	PB 50-3	PB 50-3H		ETM-60
Motor power (V / kW)	400 / 1.5	400 / 1.5	400 / 1.5	Motor power (V / kW)	400 / 2
Scaling pepples	3	3	3	Maximum bending angle	180°
Shaft diameter (mm)	40	50	50	Programmable	yes
Digital display for pass depth	no	yes	yes	Digital display	yes
Speed (T / PMn)	14	8.5	8.5	Speed (T / PMn)	3
Tilting head	yes	yes	yes	Minimum bending radius	3 x the diameter
Max. Capacities (mm)	60 x 1.5 / 1 1/2" Pipe; square 40 x 40 x 3	70 x 1.5 / 2" Pipe; square 50 x 50 x 3	70 x 1.5 / 2" Pipe; square 50 x 50 x 3	Max. capacities (mm)	60 x 4 & 2" x 4
Dimensions (mm)	800 x 870 x 1'350	1'100 x 800 x 1'400	1'100 x 800 x 1'600	Dimensions (mm)	600 x 500 x 980
Weight (kg)	340	355	430	Weight (kg)	190
Delivered with	User's manual	User's manual	User's manual	Delivered with	User's manual Service keys
EAN	7612375631937	7612375631944	7612375631951	EAN	7612375631968
DEEE	8.50	8.88	10.75	DEEE	4.75
RANGE	C	C	C	RANGE	C

MANUAL VERTICAL PRESSES

15 TON HF2

- Vertical workshop press
- Manual hydraulic press 15 TON HF2
- robust and stable
- Quality steel frame, adjustable table height
- This press is excellent for assembly, straightening and bending, but also
- for mounting and dismounting bearings



Catalogue price excl.


£1 717



Made in Holland

30 TON HF2

- Vertical workshop press
- Manual hydraulic press 30 TON HF2
- robust and stable
- Quality steel frame, adjustable table height
- This press is excellent for assembly, straightening and bending, but also
- for mounting and dismounting bearings

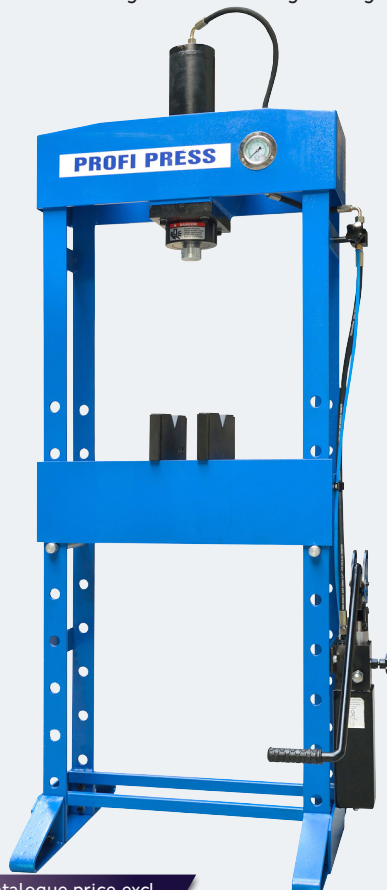

Catalogue price excl.


£2 164



Made in Holland

50 TON HF2

- Vertical workshop press
- Manual hydraulic press 50 TON HF2
- robust and stable
- Quality steel frame, adjustable table height
- This press is excellent for assembly, straightening and bending, but also
- for mounting and dismounting bearings

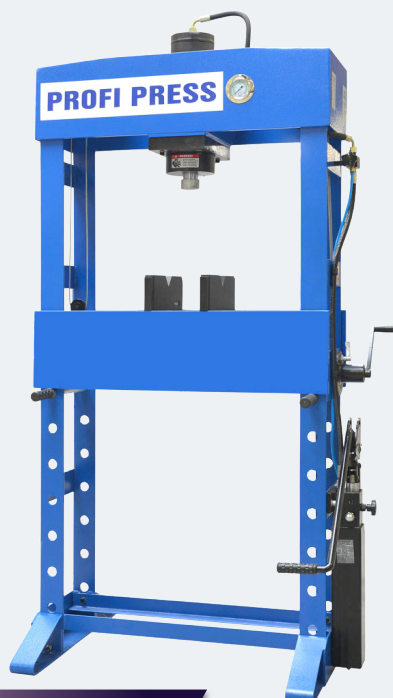

Catalogue price excl.

£3 186



Made in Holland

	15 TON HF2	30 TON HF2	50 TON HF2
Pressure force (kN)	147.15	294.3	490.5
Pressure (bar)	382.2	374.6	399.5
Piston travel (mm)	160	160	160
Fixed cylinder	yes	yes	yes
Pressure speed (mm / cycle)	0.96	0.47	0.3
Piston approach speed (mm / cycle)	7.84	3.84	2.46
Working width	555	560	750
Tank capacity	1.5	1.5	2.3
Dimensions (mm)	1'880 x 600 x 825	2'030 x 640 x 830	2'050 x 760 x 1'100
Weight (kg)	134	172	309
Delivered with	User's manual Service keys	User's manual Service keys	User's manual Service keys
EAN	7612375631999	7612375632002	7612375632019
RANGE	I	I	I

MOTORISED VERTICAL PRESS

60 TON MH-MC2

- Robust and stable 60 TON motorised hydraulic press MH-MC2
- Quality steel frame, adjustable table height
- This press is excellent for assembling, straightening, bending and also for mounting and dismounting bearings

400V

V optional



Catalogue price excl.

£7 570



100 TON MH-MC2

AVAILABLE IN 160

- Robust and stable 100 TON motorised hydraulic press MH-MC2
- Quality steel frame, adjustable table height
- This press is excellent for assembling, straightening, bending and also for mounting and dismounting bearings

400V



Catalogue price excl.

£9 477



	60 TON MH-MC2	100 TON MH-MC2
Motor power (V / kW)	400 / 1.5	400 / 2.2
Pressure force (kN)	588	981
Pressure (bar)	259	258
Piston travel (mm)	380	380
Movable cylinder (R / L)	yes	yes
Pressure speed (mm / cycle)	0.96	0.47
Piston approach speed (mm / cycle)	8.69	7.54
Working width	750	1'100
Tank capacity	51	51
Dimensions (mm)	1'880 x 600 x 825	2'030 x 640 x 830
Weight (kg)	540	970
Delivered with	User's manual Service keys	User's manual Service keys
EAN	7612375632026	7612375632033
DEEE	13.50	24.25
RANGE	I	I

BENCH PRESSES

AP-1

Manual press

- For pressing in and pressing out bearings, for levelling and bending
- Precision-milled teeth for exact work
- The flat table surface guarantees a right angle



Catalogue price excl.

£ 76

AP-2

Manual press

- For pressing in and pressing out bearings, for levelling and bending
- Precision-milled teeth for exact work
- The flat table surface guarantees a right angle



Catalogue price excl.

£ 153

AP-3

Manual press

- For pressing in and pressing out bearings, for levelling and bending
- Precision-milled teeth for exact work
- The flat table surface guarantees a right angle



Catalogue price excl.

£ 243

AP-3R

Manual press

- Press with a ratchet lever that allows you to optimize and facilitate the pressing of your workpiece
- Has a 4-position bottom plate, perfectly perpendicular to the ram and opening to fit most spindles
- It can be mounted on a base or on a bench



Catalogue price excl.

£ 230

AP-5

- Robust cast iron frame
- Perfect for machine shops to press bearings for example
- Supplied with a robust 4 position bottom plate suitable for different spindle sizes
- Can be mounted on a base or bench



Catalogue price excl.

£ 553

Manual press

	AP-1	AP-2	AP-3	AP-3R	AP-5
Pressure Force	1 t	2 t	3 t	3 t	5.6 t
Throat (mm)	102	145	137	127	226
Max. working height (mm)	125	185	290	279	400
ø press bore (mm)	9.5	12.7	12.7	38	50
Dimensions (mm)	275 x 125 x 305	430 x 160 x 410	460 x 215 x 550	457 x 229 x 635	762 x 381 x 953
Weight (kg)	11.6	31	49	60	166
EAN	7612375500400	7612375500417	7612375500424	5060473193873	5060473193874
RANGE	J	J	J	U	U

MANUAL SHEARS

MPS-1

- This shear allows to cut a wide range of shapes
- Small but robust machine that can easily cut 14 gauge mild steel or large panels

Catalogue price excl.

£ 265



MPS-12

- Sheet metal shears
- Versatile bench mounted manual sheet metal cutter that is perfect for small fabrication shops with limited space
- Lever system connected to the folding handle for greater efficiency

Catalogue price excl.

£ 265



SS-5N



Catalogue price excl.

£ 136

SS-6N



Catalogue price excl.

£ 166

SS-8N



Catalogue price excl.

£ 197

SS-12N



Catalogue price excl.

£ 268


	MPS-1	MPS-12	SS-5N	SS-6N	SS-8N	SS-12N
Shear capacity for round (mm)	-	12.7	-	-	-	-
Capacité de cisaillement tôle d'acier (mm)	2	6	-	-	-	-
Shear capacity steel sheet (mm)	-	-	70 x 5	70 x 6	70 x 7	70 x 6
Max. round bar dimensions (ø-mm)	-	-	10	11	13	13
Blade length (mm)	108	305	120	160	200	300
Max. sheet thickness (mm)	-	-	4	4	4	5
Dimensions (mm)	610 x 254 x 343	330 x 254 x 356	390 x 175 x 430	400 x 175 x 430	430 x 175 x 430	560 x 175 x 430
Weight (kg)	9	29	10	13	25	29
EAN	5060473191047	5060473191048	7612375502657	Contact ua	7612375502671	7612375502688
RANGE	U	U	J	J	J	J

NEW HIGH PERFORMANCE CLAMPS

PROMAC®

WILTON CLAMPS

- Black oxide spindle resists wear while preventing rust
- Forged arm provides minimal bending under heavy working loads
- Heavy duty F-Series clamps/presses have 12000N clamping force, replaceable heavy duty pad
- 12000N clamping force, replaceable heavy duty pad and replaceable parts

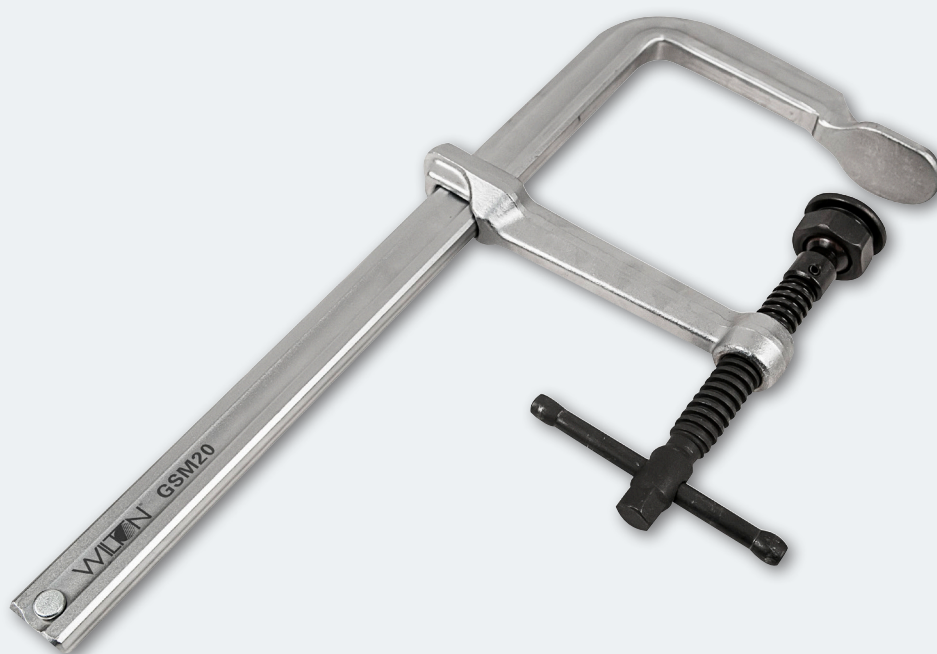

Ref.	Name	Opening (mm)	Projection	Track	Clamping force (N)	Weight	Pack.	PRICE	RANGE
86640	GSM 20	200	140	30 x 13	12'000	2.7	1	£ 103	A
86650	GSM 30	300	140	30 x 13	12'000	3	1	£ 118	A
86660	GSM 40	400	120	30 x 13	12'000	3	1	£ 128	A
86670	GSM 50	500	140	30 x 13	12'000	3.6	1	£ 148	A
86680	GSM 60	600	120	30 x 13	12'000	4	1	£ 167	A




WET / DRY VACUUMS

VAC-27TB-R

- **WET/DRY VACUUM**
- Safety hose 2.5 m
- With automatic start plug
- for tools (max. power: vacuum cleaner power : hoover)
- + power tools = 2'300 Watt)
- Servo-controlled socket
- New model

APPLICATIONS



Catalogue price excl.

£ 267


DELIVERED



VAC-32TB

- **WET/DRY VACUUM**
- Nanotechnology treated fabric filter, eliminates micro-organisms :
- bacteria, viruses etc.
- Stainless steel tank
- Safety hose 2.5 m
- Replaces VAC 32TN-VAC 127N

APPLICATIONS



Catalogue price excl.

£ 305


DELIVERED



VAC-12-H

- **WET/DRY VACUUM**
- Particularly robust and durable construction
- For professional use in hotels and offices
- Impact-resistant housing made of 70% recyclable plastic
- Equipped with a 2.5 m suction hose
- 12 m power cable
- High suction power
- Low noise emission, only 62 dB (A)
- Replaces VAC318N

APPLICATIONS



Catalogue price excl.

£ 166

DELIVERED




	VAC-27TB-R	VAC-32TB	VAC-12-H
Motor (V / kW)	230 / 1.5	230 / 1.5	230 / 0.87
Tank (materials)	Inox	Inox	Material / Plastic / PVC
Tank capacities (ltr)	27	32	12
Water column pressure (mm)	2'230	2'230	2'420
Suction capacity (m3 / h)	255	255	183
Max. sub-pressure (Mbar)	218.68	218.68	242
Noise pressure level (dB)	72	69	62
Filter system	Cartridge / Polyester	Fabric / Polyester	Cartridge / Paper
Classification filter	M	L	M
Car boot socket	yes	no	no
Accessories (ø-mm)	36	38	36
Dimensions (mm)	306 x 360 x 610	360 x 360 x 720	400 x 400 x 330
Weight (kg)	8	9.6	6
EAN	7612375517118	7612375517125	7612375528435
DEEE	0.2	0.24	0.15
RANGE	P	P	P

WET / DRY VACUUMS

VAC-50TB

- **WET/DRY VACUUM**
- Nanotechnology treated fabric filter
- nanotechnology, eliminates microorganisms: bacteria, viruses etc.
- Safety hose 2.5 m

UTILISATIONS



Catalogue price excl.

£ 390


DELIVERED



VAC-50-2TB

- **WET/DRY VACUUM**
- Nanotechnology treated fabric filter
- nanotechnology, eliminates microorganisms: bacteria, viruses etc.
- Safety hose 2.5 m

APPLICATIONS



Catalogue price excl.

£ 557


DELIVERED



VAC-62-2TB

- **WET/DRY VACUUM**
- Equipped with an antistatic and oil resistant hose
- Easy draining of remaining water through a hose
- Servo-controlled socket
- Replaces VAC62 / 2T

APPLICATIONS



Equipped with the FLOWMIX system

Catalogue price excl.

£ 778

DELIVERED




	VAC-50TB	VAC-50-2TB	VAC-62-2TB
Motor (v / kW)	230 / 1.5	230 / 2.2	230 / 2.2
Tank (materials)	Inox	Inox	Inox
Tank capacities (ltr)	50	50	62
Water column pressure (mm)	2'230	2'230	2'680
Suction capacity (m3 / h)	215	400	400
Max. sub-pressure (Mbar)	218.68	218.68	233.39
Noise pressure level (dB)	72	72	82
Filter system	Multi-tube filter / HEPA cartridge	Fabric / Polyester	Cartridge / Polyester
Classification filter	L	L	M
Car boot socket	no	no	no
Accessories (ø-mm)	38	38	38
Dimensions (mm)	500 x 500 x 870	500 x 500 x 870	580 x 740 x 930
Weight (kg)	13	17.5	26
EAN	7612375517149	7612375517156	7612375517187
DEEE	0.325	0.438	0.65
RANGE	P	P	P

WET / DRY VACUUMS

VAC-78-2TB

- WET/DRY VACUUM
- 38 MM HOSE, LENGTH 5 M, WITH NOZZLES
- 38 mm hose, length 2.5 m, with nozzles
- Tilting tank for easy emptying of remaining water
- Solid wheels



Catalogue price excl.


£ 750

DELIVERED



VAC-3 / 78 OIL

- VACUUM FOR WATER / DUST / OIL / CHIPS
- OIL / CHIPS
- Stainless steel tank – Capacity 78 litres
- Anti-return device for liquids towards the motor
- Specific seals for chemical products suction



Catalogue price excl.

£ 959
sans kit

Catalogue price excl.

£1348
avec kit


DELIVERED



VAC-3 / 50 OPT W&D

- WET/DRY VACUUM
- Stainless steel tank – 3 independent and modular
- Trolley for easy movement
- HEPA cartridge filter H14 (High filtration)
- New model

Delivered with PMDT 01227



Catalogue price excl.

£1663

DELIVERED




	VAC-78-2TB	VAC-3 / 78 OIL	VAC-3 / 50 OPT W&D
Motor (v / kW)	230 / 2.2	220 – 240 V / 3,5 kW	220 – 240 V / 3,3 kW
Tank (materials)	Material / Plastic / PVC	Inox	Inox
Tank capacity (ltr)	50	78	50
Water column pressure (mm)	2'230	2'500	2'300
Suction capacity (m3 / h)	510	645	600
Max. sub-pressure (Mbar)	218.68	–	–
Noise pressure level (dB)	72	76	76
Filter system	Multi-tube filter / HEPA cartridge	Polyester cartridge	HEPA 14 cartridge / Filter STAR-SHAPED / PCB pre-filter / Fleece bag class M
Classification filter	–	–	–
Car boot socket	no	no	no
Accessories (ø-mm)	38	38 / 60 or 50 / 60	60
Dimensions (mm)	600 x 600 x 990	550 x 600 x 980	580 x 700 x 1150
Weight (kg)	28	28	68
EAN	7612375517194	7612375632040	7612375632057
DEEE	0.7	0.7	1.7
RANGE	P	P	P

WET / DRY VACUUMS

VAC-33TB-R

- **WET/DRY VACUUM**
- **Safety hose 2.5 m**
- **With automatic start socket for tools (max. power: hoover + power tools = 2'300 Watt)**
- **Servo-controlled socket**
- **New model**

APPLICATIONS



Catalogue price excl.

£ 388

DELIVERED




	VAC-33TB-R
Motor (V / kW)	230 / 1.5
Tank (materials)	Inox
Tank capacity (ltr)	32
Water column pressure (mm)	2'230
Suction capacity (m3 / h)	255
Max. sub-pressure (Mbar)	218.68
Noise pressure level (dB)	69
Filter system	Fabric / Polyester
Classification filter	L
Prise démarrage auto	yes
Accessories (ø-mm)	38
Dimensions (mm)	360 x 360 x 720
Weight (kg)	9.6
EAN	7612375517132
DEEE	0.24
RANGE	P

WET / DRY VACUUMS

VAC-360-2TB

- **WET/DRY VACUUM**
- **Synthetic tank**
- **Nanotechnology treated fabric filter**
- **eliminates micro-organisms: bacteria, viruses etc.**
- **2 high performance motors**
- **Safety hose 2.5 m**
- **Replaces VAC360 / 2N**

APPLICATIONS



Catalogue price excl.

£ 427

DELIVERED




VAC-200H

DUST VACUUM

- The professional Hoover for all problems
- Approved for fine dust of category BIA K1 and H2
- For fine and unhealthy dust
- Automatic start
- Teflon coated multi-tube filter with a capacity of 80 m2
- 1.1 m2 HEPA filter retains 99.997 % of dust
- Vacuum gauge controls power loss
- Pressure equalization valve to remove dust from the filter during operation
- 4 m flexible hose, high resistance, antistatic

APPLICATIONS



Catalogue price excl.

£1293


DELIVERED



VAC-65TPB

- **WATER VACUUM**
- **Equipped with a submersible pump for automatic emptying, delivery height 7m.**
- **GEKA outlet connection 32 mm**
- **Drain tap for remaining water**
- **Solid wheels**
- **Servo-controlled socket**


APPLICATIONS



Prix catalogue HT

£1544

DELIVERED

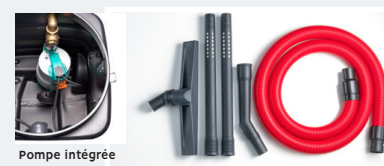

Pompe intégrée

	VAC-360-2TB	VAC-200H	VAC-65TPB
Motor (V / kW)	230 / 2.2	230 / 1.2	230 / 2.2
Tank (material)	Material / Plastic / PVC	Material / Plastic / PVC	Material / Plastic / PVC
Tank capacity (ltr)	62	16	50
Water column pressure (mm)	2'230	2'500	2'230
Suction capacity (m3 / h)	510	215	510
Max. sub-pressure (Mbar)	218.68	250	218.68
Noise pressure level (dB)	72	69	72
Filter system	Multi-tube filter / HEPA cartridge	Multi-tube filter / HEPA cartridge	-
Classification filter	L	H	-
Car boot socket	no	yes	-
Accessories (ø-mm)	38	40	38
Dimensions (mm)	550 x 700 x 920	425 x 425 x 780	600 x 600 x 990
Weight (kg)	22	15	28
EAN	7612375517163	5704002677219	7612375517194
DEEE	0.55	0.38	0.75
RANGE	P	P	P

GENERATORS

GE-2500N

Supplied with wheelbar-

- The petrol generators of the
- Promac series convince with an unbeatable price-performance ratio
- All equipped with voltmeter, oil monitoring system, fuel gauge and overload protection switch
- Applications: lighting, power tools, compressors, angle grinders, portable circular saws, lawn mowers, pumps

230V

**SINGLE CYLINDER
GASOLINE ENGINE**

Catalogue price excl.

£ 442



GE-4000N

Supplied with wheelbar-

- The petrol generators of the
- Promac series convince with an unbeatable price-performance ratio
- All equipped with voltmeter, oil monitoring system, fuel gauge and overload protection switch
- Applications: lighting, power tools, compressors, angle grinders, portable circular saws, lawn mowers, pumps

230V

**SINGLE CYLINDER
GASOLINE ENGINE**

Catalogue price excl.

£ 697



GE-6500N

Supplied with wheelbar-

- The petrol generators of the
- Promac series convince with an unbeatable price-performance ratio
- All equipped with voltmeter, oil monitoring system, fuel gauge and overload protection switch
- Applications: lighting, power tools, compressors, angle grinders, portable circular saws, lawn mowers, pumps

230V

**SINGLE CYLINDER
GASOLINE ENGINE**

Catalogue price excl.

£ 971



	GE-2500N	GE-4000N	GE-6500N
Type of motor	1 cylinder, 4-stroke	1 cylinder, 4-stroke	1 cylinder, 4-stroke
Voltage (V)	230	230	230
Electrical current (VA)	2.2	3.5	5.5
Frequency (Hz)	50	50	50
Type of protection	IP23	IP23	IP23
Type of socket outlet	2 x T12	2 x T23	2 x T23
Electrical connection DC (V)	12	12	12
Engine power (hp)	7	9	16
Tank capacity (lt.)	15	25	25
Operating time half load (h)	13	13	9
Electric start	-	-	yes
Dimensions (mm)	805 x 445 x 555	905 x 555 x 645 / 69	905 x 555 x 645 / 85
Weight (kg)	39	69	85
EAN	7612375521757	7612375521764	7612375521771
RANGE	P	P	P

TOOL FRANCE

PROMAC

PROMAC

Model	PBM-1838DV (Serial: 1318 MMLV) Article
Power	~230V 50-60Hz 8A P2=0.75kW S1
Specification	V _{max} 100-2000/min M12
Article No.	PBM-1838DV
Series No.	PBM-1838DV
Weight	110kg
Year	20
JPM (1700) AG, CH-8117 Fällanden, Switzerland www.promac.com	

Digital
Height
Gauge

0.01mm

0.02mm

0.05mm

0.1mm

0.2mm

0.5mm

1mm

2mm

5mm

10mm

20mm

50mm

100mm

200mm

500mm

1000mm

2000mm

5000mm

10000mm

20000mm

50000mm

100000mm

200000mm

500000mm

1000000mm

2000000mm

5000000mm

10000000mm

20000000mm

50000000mm

100000000mm

200000000mm

500000000mm

1000000000mm

2000000000mm

5000000000mm

10000000000mm

20000000000mm

50000000000mm

100000000000mm

200000000000mm

500000000000mm

1000000000000mm

2000000000000mm

5000000000000mm

10000000000000mm

20000000000000mm

50000000000000mm

100000000000000mm

200000000000000mm

500000000000000mm

1000000000000000mm

2000000000000000mm

5000000000000000mm

10000000000000000mm

20000000000000000mm

50000000000000000mm

100000000000000000mm

2022



PREMIUMS

WWW.TOOLFRANCE.

PROMAC

Valid from 01/01/2022
to 31/07/2022

Price EX. **Excluding transport
costs and container surcharge**

YOUR DEALER

TOOL FRANCE

TOOL France SAS • 9 Rue des Pyrénées • 91090 LISSES • France
Tél. +33 (0)1 69 11 37 37 • www.promac.fr