



Link to the website

PREMIUMS

WWW.TOOLFRANCE.COM

Valid from 01/01/2024 to 31/08/2024

Price EX. Excluding transport costs and container surcharge





BANDSAWS

JWBS-9X-M

- Robust cast aluminium work table, can be tilted up to 45°
- Ideal for precise routine work
- Powered by a quiet induction motor
- Includes precise positioning stop and mitre gauge
- With work light for illuminating the cut
- Saw blade guidance by means of sliding pins and ball bearing

230V



Price catalogue EX

401€

JWBS-10-M

- Its 100mm capacity and wide table will allow you to work on already large sections
- Its open base ensures stability and ease of use.
- Its rolling blade guides will ensure clean and precise cuts.
- Equipped with a safety micro switch, you will work in complete safety and according to the standards in force

230V



Price catalogue EX

526€

JBS-12M

- Its 180mm capacity and its large 480x400 table will allow you to work on already large sections
- Its open base ensures stability and ease of use. Its rolling blade guides will ensure clean and precise cuts
- The JBS 12 is equipped with the latest electrical safety devices and will give you complete satisfaction

230V



Price catalogue EX

1 213€

JWBS-14Q-M

- Machine with a welded steel frame and a wide cast iron table, tilting 10° to the left and 45° to the right
- Equipped with roller-mounted blade guides, you can easily modify and adjust them to suit your cuts

230V



Price catalogue EX

1 767€

	JWBS-9X-M	JWBS-10-M	JBS-12M	JWBS-14Q
Power (V / kW)	230 / 0.35	230/0,35	230/0,80	230/0.56
Flywheel diameter (mm)	240	240	310	350
Maximum cutting height / Gooseneck (mm)	80 / 230	100 / 245	180 / 305	205 / 343
Table tilt	0° - 45°	0 - 45°	0 - 45°	10° L - 45° R
Table dimensions (mm)	300 x 300	335 x 345	480 x 400	500 x 385
Blade speed (m / min)	660	870	370 and 800	800
Saw blade (mm)	1'575	1'712	2'240	2'560
Min / max saw blade width (mm)	3 / 10	3 to 13	6 to 15	3 to 25
Blade guide	Ball Bearings	Ball Bearings	Ball Bearings	Ball Bearings
Table height from floor (mm)	-	1'055	1'000	1'000
Dimensions (mm)	500 x 500 x 740	760 x 500 x 1'500	915 x 655 x 1'860	830 x 785 x 1'750
Weight (kg)	20	40	68	97
Dust port (ø-mm)	53	100	100	100
Supplied with	• Suction connection : ø 50 mm - Mitre guide +/- 60° - Positioning stop - Saw blade 6.3 mm	- Open base supplied - Parallel Guide - Tab Guide 1 Ribbon - Mounting accessories - Manual	- Open base supplied - Parallel Guide - Tab Guide 1 Ribbon - Mounting accessories - Manual	- Parallel Guide - Tab Guide 1 Ribbon - Safety Pusher - Manual
DEEE	1.19	2.548	4.76	6.51
EAN	7612375526981	7612375512946	7612375512106	7612375702217
RANGE	J	J	J	J

BANDSAWS

JWBS-15-M / JWBS-15-T

- The 546 x 406 mm cast-iron table provides the necessary stability for precision cutting
- Quick release and blade tensioning system
- The large cutting capacity of 356 mm allows you to cut solid wood panels

230V

Price catalogue EX

2 960 €
JWBS-15-M

400V

Price catalogue EX

3 260 €
JWBS-15-T



JWBS-18-M / JWBS-18-T

- Precision cast iron table 692 x 508 mm for stability and work support
- Quick release and blade tensioning system
- Two selectable blade speeds and cast iron blade wheels
- Independently adjustable ball bearing guide system

230V

Price catalogue EX

3 607 €
JWBS-18-M

400V

Price catalogue EX

3 830 €
JWBS-18-T



JWBS-20-T

- Equipped with a 5 HP engine, this machine will be able to work for long hours
- Its solid cast iron table offers a gooseneck of over 500 mm - Blade guide mounted on bearings - Cutting height adjustment by independent steering wheel, all mounted on a rack and pinion for optimum precision
- Rip fence mounted on a round bar for better stability

400V

Price catalogue EX

5 430 €



	JWBS-15-M / T	JWBS-18-M / T	JWBS-20-T
Power (V / kW)	230 / 1.1 - 400 / 1.5	230 / 1.5 - 400 / 2.2	400/3.7
Flywheel diameter (mm)	375	470	514
Maximum cutting height / Throat (mm)	356 / 359	406 / 457	406/508
Tilt of the table	5° left, 45° right	5° left, 45° right	5° left / 45° right
Table dimensions (mm)	546 x 406 x 51	692 x 508 x 41	690 x 508
Blade speed (m / min)	760	570 / 900	640 and 1'220
Saw blade (mm)	3'380	3'810	4'013
Min / max saw blade width (mm)	3 / 25	3 / 32	3 to 38
Blade guide	Ball Bearings	Ball Bearings	Ball Bearings
Table height from floor (mm)	890	940	940
Mitre T-slot (mm)	19.1 x 9.5	19.1 x 9.5	19,1 x 9
Dimensions (mm)	750 x 812 x 1'880	914 x 864 x 2'032	940 x 845 x 2'235
Weight (kg)	174	217	258
Dust port (ø-mm)	100	100	100
Supplied with	Suction connection: ø 100 mm Mitre guide +/- 45 Positioning stop Saw blade 13 mm	Suction connection: ø 100 mm Mitre guide +/- 45 Positioning stop Saw blade 20 mm	Suction Fitting Parallel Guide Trimmer Guide 1 Ribbon Mounting Accessories Manual
DEEE	12.04 / 12.18	15.19	19.32
EAN	7612375 520453 / 7612375 527995	7612375 520477 / 7612375 520484	7612375 538755
RANGE	J	J	J

BANDSAWS BLADES



Models	Description	Machine	Price EX	Code	EAN
2570	Blade 1575 x 3 x 0,65 – 14 teeth	JWBS 9 x	34 €	J	7612375694192
2571	Blade 1575 x 3 x 0,65 – 18 teeth	JWBS 9 x	34 €	J	7612375680034
2572	Blade 1575 x 5 x 0,40 – 14 teeth	JWBS 9 x	34 €	J	7612375696219
2573	Blade 1575 x 5 x 0,40 – 24 teeth	JWBS 9 x	34 €	J	7612375694437
2567	Blade 1575 x 6 x 0,40 – 4 teeth	JWBS 9 x	34 €	J	7612375679991
2568	Blade 1575 x 8 x 0,40 – 4 teeth	JWBS 9 x	34 €	J	7612375680003
2569	Blade 1575 x 10 x 0,40 – 4 teeth	JWBS 9 x	34 €	J	7612375680010
10000111	Blade 1712 x 6 x 0.36 – 10 teeth	JWBS-10	34 €	J	7612375692709
10000112	Blade 1712 x 10 x 0.36 – 6 teeth	JWBS-10	42 €	J	7612375692716
10000113	Blade 1712 x 13 x 0.36 – 4 teeth	JWBS-10	42 €	J	7612375692723
100008019	Blade 4013 x 6 x 0.50 – 6 teeth	JWBS-20	42 €	J	7612375692730
100008020	Blade 4013 x 13 x 0.50 – 4 teeth	JWBS-20	104 €	J	7612375692747
100008021	Blade 4013 x 16 x 0.50 – 4 teeth	JWBS-20	104 €	J	7612375692754
100008022	Blade 4013 x 20 x 0.50 – 3 teeth	JWBS-20	104 €	J	7612375692761
100008023	Blade 4013 x 25 x 0.50 – 3 teeth	JWBS-20	104 €	J	7612375692778
2503	Blade 2240 x 3.0 x 0.65 – 14 teeth	JBS 12	104 €	J	7612375500141
10000101	Blade 2240 x 6 x 0,50 – 6 teeth	JBS 12	44 €	J	7612375680096
2505	Blade 2240 x 10 x 0.65 – 6 teeth	JBS 12	44 €	J	7612375500165
9225010	Blade 2240 x 10 x 0,50 – 6 teeth	JBS 12	44 €	J	7612375696202
9225015	Blade 2240 x 16 x 0,50 – 4 teeth	JBS 12	44 €	J	7612375680089
10000103	Blade 2560 x 3 x 0.6mm – 14 teeth	JWBS 14Q	44 €	J	7612375700930
10000104	Blade 2560 x 6 x 0.5mm – 6 teeth	JWBS 14Q	45 €	J	7612375700947
10000105	Blade 2560 x 10 x 0.4mm – 6 teeth	JWBS 14Q	45 €	J	7612375700954
10000110	Blade 2560 x 16 x 0.5mm – 4 teeth	JWBS 14Q	45 €	J	7612375700961
10000115	Blade 2560 x 20 x 0.6mm – 3 teeth	JWBS 14Q	45 €	J	7612375688931
10008000	Blade 3380 x 6.0 x 0.6mm – 6 teeth	JWBS 15	68 €	J	7612375688948
10008001	Blade 3380 x 6.0 x 0.50 – 4 teeth	JWBS 15	68 €	J	7612375688955
10008002	Blade 3380 x 6.0 x 0.60 – 10 teeth	JWBS 15	68 €	J	7612375688962
10008003	Blade 3380 x 10.0 x 0.50 – 6 teeth	JWBS 15	70 €	J	7612375688979
10008004	Blade 3380 x 10.0 x 0.50 – 4 teeth	JWBS 15	70 €	J	7612375688986
10008005	Blade Blade 3380 x 20.0 x 0.70 – 8 teeth	JWBS 15	76 €	J	7612375688993
10008006	Blade 3380 x 20.0 x 0.60 – 6 teeth	JWBS 15	76 €	J	7612375689006
10008007	Blade 3380 x 20.0 x 0.60 – 4 teeth	JWBS 15	76 €	J	7612375689013
10008008	Blade 3380 x 25.0 x 0.70 – 8 teeth	JWBS 15	77 €	J	7612375689020
10008009	Blade 3380 x 25.0 x 0.60 – 6 teeth	JWBS 15	77 €	J	7612375689037
10008010	Blade 3810 x 6.0 x 0.60 – 6 teeth	JWBS 18	73 €	J	7612375689044
10008011	Blade 3810 x 6.0 x 0.50 – 4 teeth	JWBS 18	73 €	J	7612375689051
10008012	Blade 3810 x 10.0 x 0.60 – 6 teeth	JWBS 18	77 €	J	7612375689068
10008013	Blade 3810 x 10.0 x 0.50 – 4 teeth	JWBS 18	77 €	J	7612375689075
10008014	Blade 3810 x 20.0 x 0.70 – 8 teeth	JWBS 18	86 €	J	7612375689082
10008015	Blade 3810 x 20.0 x 0.60 – 6 teeth	JWBS 18	86 €	J	7612375689099
10008016	Blade 3810 x 20.0 x 0.60 – 4 teeth	JWBS 18	86 €	J	7612375689105
10008017	Blade 3810 x 25.0 x 0.70 – 8 teeth	JWBS 18	88 €	J	7612375689112
10008018	Blade 3810 x 25.0 x 0.60 – 6 teeth	JWBS 18	88 €	J	7612375689112

SCROLL SAWS

354

- Cast iron table can be tilted from -10° to +45° to the right
- Two speed motor
- Heavy cast iron construction to reduce vibration and ensure stability
- Blower system continuously cleans the cutting line



230V

Price catalogue EX

707 €

354V

- Double arm pivots for perfectly parallel blade action
- Variable blade speeds over a range of 400 – 1,400 strokes / min
- Uses pinned or pinless blades
- Maximum cutting depth of 60 mm, greater than most other machines
- Heavy cast iron construction to reduce vibration and ensure stability
- Supplied with eye protection, clamp and chip blower for safe operation



230V

Price catalogue EX

847 €

JSS-16A

- For complex cutting radii on small parts made of wood, chipboard
- plywood and plastic
- Variable speed range of 550 – 1'600 strokes / min
- Quick-change blade system
- Use of saw blades with or without spindle
- Saw blade can be rotated by 90° for an extended working range
- Blower system continuously cleans the cutting line
- With eye protection



230V

Price catalogue EX

207 €

	354	354V	JSS-16A
Motor (V / kW)	230 / 0.12	230 / 0.12	230 / 0.09
Speed range (strokes / min)	700 – 1'400	400 – 1'400, variable	550 – 1'600, variable
Saw blade (mm)	130	130	127 / 130
Gooseneck (mm)	460	460	406
Oscillation stroke length (mm)	20	20	15
Table dimensions (mm)	450 x 230	450 x 230	415 x 254
Max. cutting height (mm) (90° / 45°, mm)	60 / 45	60 / 45	50
Arm tilt	-	-	-
Table tilt	45° left – 10° right	45° left – 10° right	0° – 45° left
Dust port (mm)	36	36	35
Dimensions (mm)	290 x 640 x 380	640 x 290 x 380	620 x 340 x 330
Weight (kg)	29	29	13.5
Supplied with	Suction Adapter 3 sets of 5 blades 2 sets of Blade Holders (0.5 and 0.7mm) Service Wrenches User Manual	Suction Adapter 3 sets of 5 blades 2 sets of Blade Holders (0.5 and 0.7mm) Service Wrenches User Manual	Set of 5 spindle saw blades: 10,15,18,20,25 Z 2 saw blade holders Suction connection: Ø 35 mm
DEEE	1.62	1.62	0.66
EAN	7612375600933	7612375600940	7612375512656
RANGE	J	J	J

SLIDING MITRE SAWS / SCROLL SAWS

JSMS-10L-M

- Powerful 1.5 kW motor with braking system
- Table extensions up to 1030 mm
- Integrated spindle lock for easy blade change
- Cast aluminium design for easy transport
- Clamping device for workpiece retention for precision cutting
- Integrated bevel stops at 0° and 45°

Price catalogue EX

399 €

230V



JWSS-22B

- The upper blade holder clamps and tensions the blade at once (patent pending)
- The removable lower blade holder clips on quickly and safely quickly and securely
- Large 600 x 322 mm cast iron table provides a stable working surface to reduce vibration
- Grooved table for quick and easy blade changes
- Variable speed range of 400 – 1550 strokes / min
- Arm tilts 45° to the right and 40° to the left, keeping the work table flat for more precise cutting for more precise cutting

Price catalogue EX

1 523 €

230V

TILTING ARM



	JSMS-10L-M
Motor (V / kW)	230 / 1.5
Blade speed (rpm)	4'500
Blade diameter (ø-mm)	254
Blade bore (ø-mm)	30
Head tilt	0° – 45°, right and left
Cutting width (90°/45°)	90 / 42
Cutting height (90°/45°)	305 / 215
Angular rotation	0° – 45°, right and left
Head indexing	0° / 15° / 22.5° / 30° / 45°
Dimensions (mm)	1'047 x 911 x 597
Weight (kg)	18
Supplied with	Pellet saw blade carbide 40 teeth Clamping device Chip bag Linear laser
DEEE	1.08
EAN	7612375700718
RANGE	J

	JWSS-22B
Motor (V / kW)	230 / 0.05
Speed range (strokes / min)	400 – 1'550, variable
Saw blade (mm)	130 (with or without lugs)
Oscillation stroke length (mm)	19
Gooseneck (mm)	565
Table dimensions (mm)	600 x 322
Max. cutting height (at 90° in mm)	48
Arm tilt	45° right – 45° left
Dimensions (mm)	840 x 400 x 445
Weight (kg)	31
Supplied with	5 coarse-toothed saw blades Saw blade storage Suction connection: ø 38 mm Blade attachments 4 rubber feet 2 lower blade holders Workpiece retainers
DEEE	0.66
EAN	7612375517293
RANGE	J

CONSTRUCTION SAWS

JTS-315SP-M | JTS-315SP-T

- Fold-away feet and bayonet mounted on the rear table extension for quick machine start-up
- Powerful motor with brake, suitable for continuous operation
- Machine table made of corrosion and wear resistant galvanised steel
- Table insert made of anodised aluminium
- Precisely guided sliding table with ball bearing for straight and bevelled cuts
- Convenient blade tilt up to 47° via hand wheel, adjustable stop at 0°.
- Transport device facilitates simple change of positions



230V
315SP-M

400V
315SP-T

Price catalogue EX

753 €

JTS-600X-M | JTS-600X-T

- The cast iron table guarantees precise cuts
- Sliding table made of extruded aluminium, precision machined and anodised
- Robust positioning stop with micro adjustments on the round bar guide
- Large manual cast iron wheels for easy operation 460 x 600 mm support table with positioning stop positioning stop for retraction of 2'200 mm



230V
600X-M

400V
600X-T

Price catalogue EX

2 365 €

JTS-600XL-M | JTS-600XL-T

- Cast iron table to ensure the stability of the unit
- Anodised aluminium mobile carriage mounted on bearings for high cutting accuracy
- Robust parallel guide with micro-adjustments on round bar
- Cast iron handwheels for easy operation 460 x 600 mm support table on telescopic arm
- Telescopic stop up to 2200 mm



230V
600XL-M

400V
600XL-T

Price catalogue EX

2 846 €

	JTS-315SP-M	JTS-315SP-T	JTS-600X-M	JTS-600X-T	JTS-600XL-M	JTS-600XL-T
Power (V / kW)	230 / 1,6	400 / 2,0	230 / 1,5	400 / 1,5	230 / 1,5	400 / 1,5
Blade speed (rpm)	2'990		4'000		4'000	
Blade size / bore (ø-mm)	315 / 30		250 / 30		250 / 30	
Blade tilt	0 – 47°		0° – 45°		0° – 45°	
Max. cutting height 0° / 45° (mm)	90 / 60		80 / 54		80 / 54	
Max. depth of cut (mm)	310		610		610	
Table size (mm)	800 x 550		800 x 350		800 x 350	
Extension size (mm)	800 x 550 (Back)		415 x 350		415 x 350	
Table extension, right (mm)	800 x 550 (option)		800 x 270 (standard)		800 x 270 (standard)	
Precision sliding table (mm)	250 x 230		1'000 x 255		1'000 x 255	
Max. cutting length (mm)	600		610		1'600	
Dimensions (mm)	2'050 x 970 x 1'000		1'400 x 2'200 x 1'100		1'400 x 2'200 x 1'100	
Weight (kg)	74		150		150	
Supplied with	Transport wheels and carrying handle Push rod Dust port ø 100 mm Positioning stop		Sliding table format 1'000 x 255 mm Carbide saw blade ø 254 x 30 x 3 mm – 36 WZ Positioning stop Table 460 x 600 mm with removable stop 2'200 mm Suction connection ø 100 mm		Sliding table format 1'000 x 255 mm Carbide saw blade ø 254 x 30 x 3 mm – 36 WZ Positioning stop Table 460 x 600 mm with removable stop 2'200 mm Suction connection ø 100 mm	
DEEE	4.14	4.14	10.15	10.15	10.92	10.92
EAN	7612375702224	7612375702231	7612375508893	7612375705409	7612375537000	7612375705508
RANGE	J		J		J	

RADIAL MITRE SAWS

JTSS-1600-M | JTSS-1600-T

- Professional sliding table saw for working with wood and wood-based laminates
- This machine is equipped with a sliding table (support) with a travel distance of 1'600 mm
- Supplied with various accessories, which is a clear advantage as no further purchase of parts is necessary
- The machine has a scoring blade driven by the main motor and a SAWING module with tilt and height adjustment
- Bleached grey cast iron table



230V

400V

Price catalogue EX

5 532 €

	JTSS-1600-M	JTSS-1600-T
Power (V / kW)	230 / 2.4	400 / 3.0
Blade speed (rpm)		4'700
Blade size / bore (ø-mm)		315 / 30
Blade tilt		0 – 45°
Max. cutting height 0° / 45° (mm)		100 / 80
Max. distance between blade and positioning stop		1'220
Table size (mm)		800 x 385
Extension size (mm)		500 x 310 (Back)
Table extension, right (mm)		800 x 400
Precision sliding table (mm)		1'600 x 270
Max. cutting length (mm)		1'350
Scoring blade speed (rpm)		8'700
Scoring blade size / bore (ø-mm)		90 / 20
Dimensions (mm)		1'750 x 3'000 x 1'200
Weight (kg)		265
Supplied with	1,600 x 240 mm sliding table with edging guide Carbide saw blade ø 254 x 30 x 3 mm – 36 WZ Positioning stop 680 x 580 mm support table mounted on arm with telescopic scale up to 2200mm Suction connection ø 100 mm	
DEEE	18.55	18.55
EAN	7612375 537017	7612375 508451
RANGE		J

BENCH TOP PLANER

JWP-12

230V

Price catalogue EX

547 €

- With sharpening disc for a clean cut in no time
- The 4-column guide ensures stability and precision
- Powerful 1,800 W motor with overload protection
- 18,000 cuts per minute ensure optimum planing results
- Folding table extensions with support rollers make work easier
- Accurate depth-of-pass indicators (JWP-12L)

JWP-12L

NEW

230V

Price catalogue EX

623 €



STATIONARY PLANING MACHINE

230V

JPT 8B

- Robust mobile or stationary planer for use on building sites and in workshops
- Powerful 1.5 kW induction motor
- 9'000 rpm ensure optimal planing results
- HSS planing blades can be resharpened
- High quality thick table and planer for less friction and wear
- The 4-column guide ensures stability and precision

Price catalogue EX

763 €



PLANING MACHINE ON STAND

JPT 10B

230V

Price catalogue EX

939 €

- Robust mobile or stationary planer for use on building sites and in workshops
- Powerful 1.5 kW induction motor
- 9'000 rpm ensure optimal planing results
- HSS planing blades can be sharpened
- High quality thick table and planer for less friction and for less friction and wear
- The 4-column guide ensures stability and precision



	JWP 12	JWP 12L	JPT-8B-M	JPT-10B-M
Power (V/kW)	230 / 1,80	230 / 1.7	230 / 1,50	230 / 1,50
Surface Planing				
Max width (mm)	-	-	200	250
Table length (mm)	-	-	740	954
Distance table/surface	-	-	350	985
Workpiece stop (mm)	-	-	540 x 105	630 x 120
Tilting area	-	-	0°/45°	0°/45°
Max thickness (mm)	-	-	3	3
Planing				
Max width (mm)	318	-	200	254
Min/Max Height	6 to 153	-	5 to 120	5 to 120
Table length (mm)	-	-	270	305
Minimum length of workpieces (mm)	200	-	160	160
Feed speed (m/min)	7	-	6	6
Max. planing thickness (mm)	2,5	-	2	2
Number of knives	2	-	2	2
Spindle speed (rpm)	9000	-	9000	9000
Width of knives (mm)	319	-	200	260
Dimensions	700x600x500	-	780 x 440 x 550	980x470x1120
Weight	30	-	28	34
Supplied with	Table extensions - Planing Suction nozzle - Iron adjustment module - Manual		Table extensions - Planing Suction nozzle - Iron adjustment module - Manual	
DEEE	2.31 / 1.98	-	1.96	2.38
EAN	7612375702156 / 7612375692631		7612375525014	7612375705492
RANGE	J	-	J	J

WORKSHOP PLANER THICKNESSER

JPT-F260-M/T

- Switching from planing mode to thicknessing mode by simply unlocking. The one-piece planing table does not require removal of the rip fence.
- The planing and thicknessing tables, made of grey cast iron, ensure perfect flatness and effortless sliding of the workpieces.
- The 3-iron cylinder ensures optimum planing results.
- Large aluminium rip fence, tiltable to 45° and mounted on a dovetail plate, ensures perfect parallelism.

230V
F260-M

400V
F260-T

Prix tarif HT

2 472 €



JPT-260-M/T

- The one-piece table makes it possible to switch very quickly from planing mode to thicknessing mode.
- The special machining of the tables allows a better gliding of the workpieces, even in case of resin residues. The 3-iron spindle allows to obtain a superior planing quality.
- The 45° tilting rip fence provides a good hold on the workpiece due to its very long length.
- The one-piece base gives the JPT 260 the necessary rigidity for quality machining.
- The automatic planing feed is unlocked
- With classic 3-iron head

230V
260-M

400V
260-T

Prix tarif HT

2 472 €



	JPT-F260-M / JPT-F260-T	JPT-260-M / JPT-260-T
Power (V/kW)	230 / 1.75 - 400 / 1.75	230 / 1.7 - 400 / 1.7
Surface Planing		
Max width (mm)	258	257
Table length (mm)	1100	1120
Distance table/ground	850	850
Workpiece stop (mm)	1100 X 150	900 x 150
Tilting area	0° / 45°	0° / 45°
Max thickness (mm)	3	3
Planing		
Max width (mm)	258	256
Min/Max Height	5 to 190	3 to 225
Table length (mm)	600	540
Minimum length of workpieces	150	150
Feed speed (m/min)	6.0	5,2
Max. planing thickness (mm)	4.5	4.5
Number of knives	3	3
Shaft rotation speed (rpm)	5'000	5'500
Knife dimensions (mm)	260 x 25 x 3	260 x 25 x 3
Dimensions	1'100 x 900 x 1'000	1'120 x 700 x 1'000
Weight (kg)	202	170
Supplied with	Digital Height Gauge - User's Manual - Blade Calibrator - Service Keys - Safety Accessories	Nozzle Aspiration - User Manual - Service Keys - Safety Accessories - Blade Calibrator
DEEE	21.315	21.315
EAN	7612375696172 / 7612375696189	7612375696189 / 7612375701654
RANGE	J	J

PLANER THICKNESSERS

Available in 2 widths with classic 3-iron head

- JPT 310 – Width 310 mm in 230 V or 400 V
- JPT 410 – Width 410 mm in 400 V only

JPT 310-M
JPT 310-T

Price catalogue EX

3 014 €

JPT 410-T

Price catalogue EX

3 812 €

230V

400V



Available with Helical Head with 56 reversible 4-sided inserts

- Designed in a compact way, the JET planers will allow you to switch from one operation to another in a few seconds
- The planing operation can be adjusted by means of an eccentric, while the planing operation can be precisely adjusted by means of a handwheel located below. A digital height indicator (Art.10000291) can be added as an option, for even more precision.
- Finally, the cast iron tables are designed to allow optimal gliding of the workpieces

230V

400V

JPT 310-HH-M
JPT 310-HH-T

Price catalogue EX

3 948 €

JPT 410HH-T

Price catalogue EX

5 714 €




	JPT-310-M / JPT-310-T	JPT-310HH-M / JPT- 10HH-T	JPT 410-T	JPT 410HH-T
Power (V/kW)	230 / 2.2 – 400 / 2.2	230 / 2.2 – 400 / 2.2	400 / 3	230 / 1.8
Surface Planing				
Max width (mm)	307	307	407	407
Table length (mm)	1'400	1'400	1'660	1'660
Distance table/ground	850	850	850	850
Workpiece stop (mm)	1'100 x 150	1'100 x 150	1'100 x 150	1'100 x 150
Tilting area	0° / 45°	0° / 45°	0° / 45°	0° / 45°
Max thickness (mm)	3	3	3	3
Planing				
Max width (mm)	307	307	407	407
Min/Max Height	3 to 225	3 to 225	3 to 225	3 to 225
Table length (mm)	540	540	600	600
Minimum length of workpieces (mm)	150	150	150	150
Feed speed (m/min)	7	7	7	7
Max. planing thickness (mm)	4.5	4.5	4.5	4.5
Number of knives	3	4 rows	3	4 rows
Spindle speed (rpm)	5'500	5500	5'500	5'500
Width of knives (mm)	310 x 25 x 3	56 carbide inserts	410 x 25 x 3	56 carbide inserts
Dimensions	1'400 x 750 x 1'000	1'400 x 750 x 1'000	1'660 x 870 x 1'000	1'660 x 870 x 1'000
Weight (kg)	230	230	315	315
Supplied with	Aspiration Nozzle User manual Service keys Safety Accessories Blade Calibrator	Aspiration Nozzle User manual Service keys Safety Accessories Blade Calibrator	Aspiration Nozzle User manual Service keys Safety Accessories Blade Calibrator	Aspiration Nozzle User manual Service keys Safety Accessories Blade Calibrator
DEEE	16.01	1.89	22.05	25.9
EAN	7612375526318 / 7612375701678	7612375754094 / 7612375701692	7612375701708	7612375701722
RANGE	J	J	J	J

PLANNER THICKNESSERS

Available in 2 widths with classic 3-iron head

- RDJ 310 – Width 310 mm 400V
- RDJ 410 – Width 410mm in 230V (NEW) or 400V

MORTISING OPTION AVAILABLE



Classic Head

RDJ 310-T



Made in Europe

RDJ 410-M

RDJ 410-T



Made in Europe



400V

Price catalogue EX

3 980 €



NEW TO THE RANGE

230V

Price catalogue EX

5 546 €

400V

Price catalogue EX

5 133 €

	RDJ310T	RDJ410M/RDJ410T
Power (V/kW)	400/3,0 (S6)	230/2,2 (S6) / 400/4,4
Surface Planing		
Max width (mm)	310	410
Table length (mm)	1400	1800
Distance table/surface	5400	5500
Workpiece stop (mm)	1300x150	1500x150
Tilting area	90°/45°	90°/45°
Max thickness (mm)	4	4
Planing		
Max width (mm)	310	410
Max. height (mm)	230	230
Table length (mm)	430	600
Feed speed (m/min)	6	6
Max. planing thickness (mm)	4	4
Number of knives	3	3
Spindle Speed (rpm)	5400	5500
Knife dimensions (mm)	310x25x3	410x25x3
Overall dimensions (mm)	1570x760x990	1950x712x1010
Weight	250	350
DEEE	13.8	13.8 / 18
EAN	7612375696509	7612375696448 / 7612375696431
RANGE	J	J

PLANNER THICKNESSERS

RDJ-310HH-M

RDJ-310HH-T

Helical head 4-sided reversible inserts

- RDJ 310HH – Width 310 mm in 230V or 400V

230V

400V

MORTISING OPTION AVAILABLE



Helical head



Made in Europe

Price catalogue EX

5 130 €

RDJ 310HH-M/RDJ310HH-T

Power (V/kW)	230/2,2-400/3,0
Surface Planing	
Max width (mm)	310
Table length (mm)	1400
Distance table/surface	5400
Workpiece stop (mm)	1300x150
Tilting area	90°/45°
Max thickness (mm)	4
Planing	
Max width (mm)	310
Max. height (mm)	230
Table length (mm)	430
Feed speed (m/min)	6
Max. planing thickness (mm)	4
Number of knives	3 rows
Spindle Speed (rpm)	5400
Knife dimensions (mm)	-
Overall dimensions (mm)	1570x760x990
Weight	250
DEEE	13,8
EAN	7612375696424 / 7612375696455
RANGE	J

PLANNER THICKNESSERS

Helical head 4-sided reversible inserts

- RDJ 410HH – Width 410 mm in 230V (NEW) or 400V

RDJ 410HH-M

NEW ADDITION TO THE RANGE

Price catalogue EX

7 477 €

230V

RDJ 410HH-T

Price catalogue EX

7 242 €

400V

MORTISING OPTION AVAILABLE



Mortising Kit

Price catalogue EX

1 398 €



Helical head



Made in Europe

RDJ410HH-M/RDJ410HH-T

Power (V/kW)	230/2,2 (S6) / 400/4,4
Surface Planing	
Max width (mm)	410
Table length (mm)	1800
Distance table/surface	5500
Workpiece stop (mm)	1500x150
Tilting area	90°/45°
Max thickness (mm)	4
Planing	
Max width (mm)	410
Max. height (mm)	230
Table length (mm)	600
Feed speed (m/min)	6
Max. planing thickness (mm)	4
Number of knives	3 rows
Spindle Speed (rpm)	5500
Knife dimensions (mm)	410x25x3
Overall dimensions (mm)	1950x712x1010
Weight	350
DEEE	18
EAN	7612375696417/ 7612375696400
RANGE	J

WOOD LATHE

JWL-1015-M

230V

- Extra-large, heavy base (GG-20) for very quiet operation and greater stability when working on poorly balanced workpieces
- Infinitely variable speed control with 3 belt levels from 200 to 3,600 rpm (JWL-1015VS-M)
- Quick-change lever for simple, precise positioning of tool holder and tailstock



Price catalogue EX

736 €

JWL-1015VS-M

230V

Price catalogue EX

853 €

JWL-1221-M

230V

- Extra-large, heavy frame for extremely quiet operation and greater stability when working on poorly balanced workpieces
- Smooth transition from forward to reverse, digital speed display
- Spindle lock at the front of the headstock, for easy changeover between a circular table and a swivel chuck



Price catalogue EX

1 168 €

JWL-1221VS-M

230V

Price catalogue EX

1 453 €

	JWL-1015-M	JWL-1015VS-M	JWL-1221-M	JWL-1221VS-M
Power (V / kW)	230 / 0,37	230 / 0,37	230 / 0,56	230 / 0,73
Diameter above bench (mm)	254		318	
Base of pivoting tool holder (mm)	186		240	
Distance between tips (mm)	385		500	
Spindle speeds (rpm)	400 / 700 / 1'000 / 1'500 / 2'200 / 3'300	200 – 3'600, variable	360 / 850 / 1'230 / 1'510 / 2'180 / 3'280	200 – 3'600, variable
Spindle nose	M33 x 3,5		M33 x 3,5	
Spindle indexing	24 x 15°		24 x 15°	
Headstock spindle cone	MK2		MK2	
Tailstock spindle cone	MK2		MK2	
Spindle bore (mm)	9,5		9,5	
Headstock spindle travel (mm)	50		57	
Tool support (ø / mm)	150 / 15,9		150 + 250 / 15,9	
Dimensions (mm)	885 x 300 x 370		853 x 280 x 450	
Weight (kg)	33	35	55	
Supplied with	• Tool holder 150 mm • Turntable 75mm • Counter Spindle MK2 • Drive claw • Ejector		• Tool holder 150 mm + 250 mm • Tray 75 mm • Counter Spindle MK2 • Drive claw • Ejector	
DEEE	2.31	2.31	3.85	3.85
EAN	7612375 508895	7612375 508901	7612375 537048	7612375 705133
RANGE	J		J	

WOOD LATHE ON BASE

JWL-1440VS-M

- Extra-large, heavy base (GG-20) for very quiet operation and greater stability when working on poorly balanced workpieces
- Fixed headstock adjustable over the entire base, 360° swivel with detents for 0° / 30° / 60° / 90° / 135° / 180° / 270°.
- Infinitely variable speed adjustment via the turning handle on the end of the headstock from 280 to 2,500 rpm
- Spindle lock at the front of the headstock, for easy changing of a circular table and swivel chuck



230V

Price catalogue EX

2 307 €



	JWL-1440VS-M
Power (V / kW)	230 / 0.75
Diameter above bench (mm)	370
Pivoting tool holder base (mm)	280
Distance between tips (mm)	1'016
Spindle speeds (rpm)	350 – 2'500, Variable
Spindle nose	M33 x 3.5
Spindle indexing	36 x 10°
Headstock spindle cone	MK2
Tailstock spindle cone	MK2
Spindle bore (mm)	9
Headstock spindle travel (mm)	108
Tool support (mm/ Ø)	300 / 25.4
Dimensions (mm)	1'880 x 460 x 1'250
Weight (kg)	165
Supplied with	• Tool Holder 300 mm • Tool Holder Console • Tray 75 mm • Counter Spindle MK2 • Drive Claw MK2 • Ejector • With Base
DEEE	11.2
EAN	7612375521139
RANGE	J

WOOD LATHE ON STAND

JWL-1640EVS-M

- Continuously adjustable speeds via frequency converter
- frequency converter, from 40 – 3'200 rpm with 2 belt levels
- Heavy duty, effective double clamping for tool holder securely holds the position
- For maximum versatility, the headstock is adjustable over the entire frame and swivels 360°

230V



Price catalogue EX

3 693 €

JWL-1840EVS-M

- Continuously adjustable speeds via frequency converter from 40 – 3'200 rpm with 2 belt levels
- The main spindle is fixed on 3 points, for more rigidity and strength
- Counterbore with robust trapezoidal thread, spindle with rotation-protected key, with scale in mm
- Indexing with 36 positions integrated in the pulley allows a multitude of decorative work

230V



Price catalogue EX

4 072 €

JWL-2442-M

- With magnetic emergency stop button, freely positionable
- can be positioned on the frame
- The main spindle is fixed on 3 points, for more rigidity and strength
- Continuously adjustable speeds via frequency converter
- frequency converter, from 0 – 3'500 rpm with 2 belt levels
- Tailstock with integrated tool storage compartment, solid quill with 115 mm stroke and mm scale
- Spindle lock, so that both hands are free to change the clamping device

230V



Price catalogue EX

8 772 €

	JWL-1640EVS-M	JWL-2442-M	JWL-1840EVS-M
Power (V / kW)	230 / 1.10	230 / 2.2	230 / 2.4
Swing over bed (mm)	418	610	470
Base of swivel tool holder (mm)	325	-	360
Distance between centers (mm)	940 (990 with short counter tip)	1'067	970 (1'025 with short counter tip)
Spindle speeds (rpm)	40 – 3'200, variable	0 – 910 / 2'000 / 3'500, variable	40 – 1,10, variable
Spindle nose	M33 x 3.5	M33 x 3.5	M33 x 3.5
Spindle indexing	36 x 10°	14 x 25.7° / 36 x 10° / 48 x 7.5°	36 x 10°
Headstock spindle taper	MK2	MK2	MK2
Tailstock spindle taper	MK2	MK2	MK2
Spindle bore (mm)	9	9.5	9
Tailstock spindle stroke (mm)	108	115	108
Tool support (mm/ Ø)	350 / 25.4	350	350 / 25.4
Centre above ground (mm)	-	1'120	1000 / 1'100
Dimensions (mm)	1'854 x 508 x 1'334	2'260 x 710 x 1'651	1'854 x 508 x 1'334
Weight (kg)	170	395	170
DEEE	11.9	13.3	27.65
EAN	7612375517316	7612375520538	7612375700824
RANGE	J	J	J

WATER GRINDING

JSSG-8-M

- The speed of rotation of the grinding wheel is controlled by an electronic variator, which ensures that the speed remains constant during the sharpening process.
- Equipped with a 250 grit grinding wheel, you will be able to sharpen your tools in the finest and most regular way possible.
- Sold with its protractor, you will have no trouble finding the right angle of sharpening.
- Its waterproof case will prevent all foreign bodies (filings and water) from entering the machine.
- Its leather disc will allow you to finish your sharpening for an optimal work.



Price catalogue EX

516 €

230V

JSSG-10-M

- The big brother of the JSSG-8-M, its 250mm diameter and large width wheel will allow you to sharpen not only your turning tools but also any sharp object (chisels, plane irons, knives or turning gouges).
- You will have the possibility to adjust the torque for heavy sharpening that requires more pressure than normal on the wheel.
- A whole range of accessories are available for this purpose.
- Its large water tank will allow your wheel to be constantly immersed, thus offering a better sharpening.
- Its waterproof case will prevent all foreign bodies (filings and water) from entering the machine.
- Its leather disc will allow you to finish your sharpening for an optimal work.
- Finally, for this model there is an optional base designed to receive all the accessories for sharpening your tools.



230V

Price catalogue EX

589 €

	JSSG-8-M	JSSG-10-M
Power (V / kW)	230 / 0.16	230 / 0.16
Motor speed (rpm)	100 – 200	90 – 150
Leather grinding disc (ø-mm)	200 x 40 x 12	230 x 30
Grinding wheel (mm)	200 x 40 x 12	250 x 50 x 12
Grain size of grinding wheel	250G	250G
Dimensions (mm)	250 x 220 x 330	400 x 300 x 330
Weight (kg)	7.8	14.5
Supplied with	Water grinding machine Grinding wheel ø 200 mm, grain 250 Leather grinding disc ø 180 mm Water tank Standard support arm Straight cutting device Scraper for grinding wheel Polishing paste tube Grinding angle guide	Water grinding machine Grinding wheel ø 250 mm, grain 250 Leather grinding disc ø 230 mm Water tank Standard support arm Straight cutting device Scraper for grinding wheel Polishing paste tube Grinding angle guide
DEEE	1.12	1.12
EAN	7612375523737	7612375700725
RANGE	J	J

COMBINATION BELT SANDER

JSG-233A-M

- 2-in-1 sanding unit, offering multiple adjustment possibilities for all lengths.
- Its sanding arm, adjustable between 0° and 90°, will allow you to make various angles for a perfect joint.
- Equipped with its velcro support, changing the sanding discs is child's play and takes only a few seconds.
- When placed on these rubber pads, vibrations and noise are reduced.

230V

Price catalogue EX

589 €



JSG-96-M

- The cast iron machine body (40kg) provides stability and support for this professional sanding unit. Its 0.50kW motor will allow you to sand a large number of wood species, even the hardest.
- The sanding arm, which can be tilted up to 90°, provides an important surface as well as the 2 tables that equip this model.
- The sanding belt can be adjusted by means of a knob to ensure perfect belt alignment, perfect alignment of the belt.
- The 2 tables can also be tilted, allowing sanding of edges or bevelling.
- Placed on its base (optional), this combination will delight the most demanding users.

230V

Price catalogue EX

920 €



JSG-31A-M

- The largest model in the range, the JSG 31A handset will find its place in a smaller space.
- Compact and robust, its cast iron design will allow all types of sanding work thanks to a powerful motor (1.10 kW).
- Placed on its base, this machine equipped with its 2 adjustable cast iron tables and with an important support, will offer you many possibilities.
- The large sanding belt (150mm) coupled with a sanding arm that can be tilted up to 90° will allow finishing and adjustments in total safety.
- Finally, the various adjustments will be facilitated by the knobs provided for this

230V

Price catalogue EX

1 982 €



	JSG-233A-M	JSG-96-M	JSG-31A-M
Power (V / kW)	230 / 0.4	230 / 0.5	230 / 1.1
Sanding disc speed (engine speed)	1'850	1'400	2'400
Sanding belt speed (m / s)	8	10	12
Sanding disc diameter (ø-mm)	200	230	300
Sanding belt dimensions (mm)	100 x 914	150 x 1'220	150 x 1'220
Table inclination of the sanding disc	0° - 45°	45° downwards	-45° / 15°
Inclination of the sanding belt table	0° - 45°	45° downwards	-45° / 0°
Sanding disc table size (mm)	115 x 225	250 x 300	230 x 440
Size of sanding belt table (mm)	25 x 125	140 x 280	190 x 330
Dust port (ø-mm)	38	100	110
Weight (kg)	26	40	124
Dimensions	500 x 450 x 350	780 x 680 x 450	830 x 700 x 1'400
Supplied with	Adhesive Velcro backing Ø200mm 1 sanding disc Ø200mm 1 sanding belt User's manual	1 sanding disc Ø230mm 1 sanding belt Mitre guide User's manual Service keys	1 sanding disc Ø 300 mm 1 sanding belt Mitre guide User's manual Service keys
Option	-	Socle J_ 708597	-
DEEE	1.82	2.8	8.68
EAN	7612375608632	7612375700701	7612375526837
RANGE	J	J	J

BELT AND CYLINDER SANDER

JBOS-5-M

- The 25mm oscillation reduces frictional heat to protect the wood and extend the life of the sleeve
- Main spindle supports travel on precision ball bearings and oscillates through a heavy duty endless shaft and gear mechanism to ensure continuous performance
- Oscillating gears operate in a closed lubrication box for long life

230V



Price catalogue EX

987 €

JOSS-S

- The 25mm oscillation reduces frictional heat to protect the wood and extend the life of the sleeve
- Main spindle supports travel on precision ball bearings and oscillates through a heavy duty endless shaft and gear mechanism to ensure continuous performance
- Oscillating gears operate in a closed lubrication box for long life

230V



Price catalogue EX

2 146 €

OES-80CS-M / OES-80CS-T

- 100 oscillations per minute ensure a smooth surface and no burn marks
- 150 x 2'260 mm sanding belt can be positioned horizontally, vertically and in any position
- Sanding pad with graphite coating to significantly increase the glide of the sanding belt and its durability

230V



Price catalogue EX

1 889 €

400V

	JBOS-5-M	JOSS-S
Power (V / kW)	230 / 0.3	230 / 0.7
Spindle speed (rpm)	1'400	1'400
Spindle diameter (ø-mm)	6,35 / 12,7 / 15,88 / 38,1 / 50,8	6,35 / 9,53 / 12,7 / 15,88 / 19,0525,4 / 38,1 / 50,8 / 76,2 / 101,6
Max. sanding height (mm)	100	80 – 160
Table dimensions (mm)	370 x 370	623 x 623
Table inclination	0° – 45° downwards	45° front / 15° rear
Spindle height (mm)	150	150 / 230
Oscillations / minute	30	60
Oscillation stroke (mm)	25	38
Dust port (ø-mm)	100	100
Dimensions (mm)	370 x 370 x 460	623 x 623 x 995
Weight (kg)	35	98
Supplied with	Pins supplied with sleeves with the diameters shown above 2 table inserts (round and oval) Storage rack for spindles 100mm Dust Adapter Adjustment keys	
DEEE	2.45	6.86
EAN	7612375704266	7612375512618
RANGE	J	J

	OES-80CS-M	OES-80CS-T
Power (V / kW)	230 / 1.1	400 / 1.5
Sanding belt speed (m / s)	16	
Dimensions of the sanding belt (mm)	150 x 2'260	
Belt inclination	90° – 180°	
Size of sanding belt table (mm)	750 x 250	
Table extension (mm)	250 x 300	
Oscillations stroke (mm)	13	
Oscillations / minute	108	
Dust port (ø-mm)	100	
Dimensions (mm)	1'150 x 460 x 960	
Weight (kg)	120	120
Supplied with	Machine stand Extension table Sanding belt guard Horizontal stop Resting block Mitre gauge 1 sanding belt Roller housing Working tools	
DEEE	8.19	8.19
EAN	7612375704310	7612375704327
RANGE	J	

DOUBLE CYLINDER SANDER

JWDS-1632-M

- Open-sided construction allows sanding widths of up to 812 mm in two passes
- SandSmart control continuously monitors the cylinder motor load and automatically regulates the conveyor motor speed to maintain the highest feed rate without overloading
- Precision-machined and balanced extruded aluminum cylinder is designed to dissipate heat and protect the work surface from heat damage
- Workpiece parallelism is quickly and accurately adjustable with Memory function



Price catalogue EX

1 962 €

230V

JWDS-1836

- Open-sided construction allows sanding widths of up to 812 mm in two passes
- SandSmart control continuously monitors the cylinder motor load and automatically regulates the conveyor motor speed to maintain the highest feed rate without overloading
- Precision-machined and balanced extruded aluminum cylinder is designed to dissipate heat and protect the work surface from heat damage
- Workpiece parallelism is quickly and accurately adjustable with Memory function



Price catalogue EX

2 441 €

230V

JWDS-2244OSC-M

- Oscillating drum sander in the new JET design with extended functionality
- Infinitely variable oscillation of the sanding drum minimises visible grinding marks
- Drum cover with integrated air guidance
- Workpiece parallelism can be adjusted easily, quickly and without tools by simply moving the feed table, with memory function



Price catalogue EX

4 157 €

230V

	JWDS-1632-M	JWDS-1836	JWDS-2244OSC-M
Power (V / kW)	230 / 1.1	230 / 1.3	230 / 1.3
Cylinder speed (rpm)	1'400	1'400	1'400
Minimum / maximum thickness (mm)	0.8 / 75	0.8 / 75	102 / 0.8
Minimum grinding length (mm)	60	60	60
Max. grinding width (mm)	406 (812, two passages)	457 (914, two passages)	560 (1120 two passages)
Roll size (mm)	127 x 410	127 x 460	584 x ø 127
Conveyor speed (m/min)	0 to 3, variable	0 to 3, variable	0 to 3, variable
Oscillation frequency (min)	-	-	0 - 120, variable
Dust port (ø-mm)	100	100	100
Dimensions (mm)	508 x 1'269 x 1'007	508 x 1'269 x 1'007	1'200 x 610 x 1'320
Weight (kg)	75	87	98
Supplied with	Machine + its open base Pre-installed sanding belt User's manual	Machine + its open base Pre-installed sanding belt User's manual	User's manual Firm machine stand with 4 wheels Sanding belt G80 Height crank Pipe holder
Options	Input/Output Table Set - 723521	Input/Output Table Set - 723521	Input/Output Table Set - 723551
DEEE	4.55	5.25	11.62
EAN	7612375 526400	7612375 520545	7612375 547658
RANGE	J	J	J

CYLINDER SANDER

JWDS-2244-M

- 5.5 kW motor for high removal power.
- New cylinder sander with new design.
- Cylinder bonnet with exhaust air guide to optimise suction and guarantee dust-free air.
- The SANDSMART control continuously monitors the load on the cylinder motor and automatically regulates the feed speed to ensure the best settings.
- Height scale and graduated ring on the crank handle for precise adjustment.
- Parallelism can be adjusted easily and without additional tools by simply moving the feed table using the Memory function.



Price catalogue EX

2 416 €

230V

DDS-225-T / DDS 237-T

- 3.7 kW motor for high removal power
- Independently adjustable rear bearings for controlled chip removal regardless of wheel diameter
- Two-stage feed motor for adaptation to different types of wood
- Drum bonnet with double dust extraction port and guide plates for efficient dust extraction
- Digital depth display for fast, safe adjustment to the required size
- Works with 75 mm and 100 mm wide sanding belts



400V

DDS-225-T

Price catalogue EX

5 951 €

400V

DDS 237-T

Price catalogue EX

8 645 €

	JWDS-2244-M	DDS-225-T	DDS-237-T
Power (V / kW)	230 / 1.3	400 / 3.7	400 / 5.5
Cylinder speed (rpm)	1400	1'400	1'400
Cylinder dimensions (ø-mm)	127 x 565	152 x 635	152 x 940
Conveyor speed (m/min)	-	3	3
Max sanding width (mm)	560	635	940
Minimum part length (mm)	60	230	230
Max. / min. sanding thickness	102 / 0.8	133 / 0.8	133 / 0.8
Dust port (ø-mm)	-	2 x 100	2 x 100
Dimensions (mm)	1070 x 610 x 1320	1'090 x 1'120 x 1'090	1'090 x 1'420 x 1'090
Weight (kg)	166	332	440
Supplied with	• Base 80-grit sanding belt (pre-installed)	• 80 grit sanding belt / pre-installed 100 grit sanding belt pre-installed Height crank	• Supplied with pre-installed abrasives in 80 and 100 grit User manual
DEEE	11.62	22.75	30.8
EAN	7612375537185	7612375702675	7612375702088
RANGE	J	J	J

ABRASIVE SLEEVES

Ref.	Description	Diameter	Height	Grit	Price	Range	EAN
575838	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	60	19 €	J	7612375703597
575839	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	80	17 €	J	7612375703603
575840	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	100	15 €	J	7612375703610
575841	Abrasive Sleeves (2 pcs)	1-1/2" – 38,10	140 mm	150	18 €	J	7612375703627
575842	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	60	27 €	J	7612375703634
575843	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	80	27 €	J	7612375703641
575844	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	100	27 €	J	7612375703658
575845	Abrasive Sleeves (2 pcs)	2" – 50,80	140 mm	150	34 €	J	7612375703665
575846	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	60	44 €	J	7612375703672
575847	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	80	35 €	J	7612375703689
575848	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	100	35 €	J	7612375703696
575849	Abrasive Sleeves (2 pcs)	3" – 76,20	140 mm	150	35 €	J	7612375703702
30105084C	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	60	17 €	J	7612375702941
709540	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	80	17 €	J	7612375704686
575800	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	100	17 €	J	7612375703214
575801	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	120	18 €	J	7612375703221
30105084A	Abrasive Sleeves (2 pcs)	1/4" – 6,35	152 mm	150	17 €	J	7612375702934
575802	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	60	15 €	J	7612375703238
575803	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	80	17 €	J	7612375703245
575804	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	100	15 €	J	7612375703252
575805	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	120	15 €	J	7612375703269
30105082A	Abrasive Sleeves (2 pcs)	3/8" – 9,53	152 mm	150	14 €	J	7612375702927
575806	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	60	17 €	J	7612375703276
575807	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	80	17 €	J	7612375703283
575808	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	100	17 €	J	7612375703290
575809	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	120	17 €	J	7612375703306
30105079A	Abrasive Sleeves (2 pcs)	1/2" – 12,70	152 mm	150	14 €	J	7612375702910
575810	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	60	15 €	J	7612375703313
575811	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	80	17 €	J	7612375703320
575812	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	100	17 €	J	7612375703337
575813	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	120	17 €	J	7612375703344
30105076A	Abrasive Sleeves (2 pcs)	5/8" – 15,875	152 mm	150	14 €	J	7612375702903
575814	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	60	20 €	J	7612375703351
575815	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	80	20 €	J	7612375703368
575816	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	100	20 €	J	7612375703375
575817	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	120	16 €	J	7612375703382
30105073A	Abrasive Sleeves (2 pcs)	3/4" – 19,05	230 mm	150	25 €	J	7612375702897
575818	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	60	24 €	J	7612375703399
575819	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	80	25 €	J	7612375703405
575820	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	100	25 €	J	7612375703412
575821	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	120	25 €	J	7612375703429
30105071A	Abrasive Sleeves (2 pcs)	1" – 25,40	230 mm	150	25 €	J	7612375702880
575825	Abrasive Sleeves (2 pcs)	1 1/2" – 38,10	230 mm	120	24 €	J	7612375703467
30105068A	Abrasive Sleeves (2 pcs)	1 1/2" – 38,10	230 mm	150	25 €	J	7612375702873
575826	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	60	31 €	J	7612375703474
575827	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	80	31 €	J	7612375703481
575828	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	100	31 €	J	7612375703498
575829	Abrasive Sleeves (2 pcs)	2" – 50,80	230 mm	120	31 €	J	7612375703504
575830	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	60	34 €	J	7612375703511
575831	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	80	34 €	J	7612375703528
575832	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	100	34 €	J	7612375703535
575833	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	120	40 €	J	7612375703542
30105062A	Abrasive Sleeves (2 pcs)	3" – 76,20	230 mm	150	40 €	J	7612375702859
575834	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	60	43 €	J	7612375703559
575835	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	80	44 €	J	7612375703566
575836	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	100	44 €	J	7612375703573
575837	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	120	44 €	J	7612375703580
30105060A	Abrasive Sleeves (2 pcs)	4" – 101,60	230 mm	150	44 €	J	7612375702842



BENCH TOP DRILL

JDP 15B / JDP 15B-T

- This benchtop drill will offer you all the drilling possibilities thanks to its table that can be tilted on both sides
- Equipped with a laser positioning system and LED lighting, you will be able to drill with great precision

230V

400V



Price catalogue EX

1 069 €

FLOOR DRILL

JDP-17-M / JDP-17-T

- Particularly large, precision-sharpened work table with
- 2 T-slots and 4 slots in the table for ven more flexibility
- Integrated stop for the drilling depth for precision series work
- Xacta-X laser system identifies the centre of the drill bit

230V

400V



Price catalogue EX

1 385 €

RADIAL DRILL

JRD-387A-T

- Industrial radial drilling machine for various jobs
- Head can be adjusted horizontally and vertically by means of a toothed rack
- Head can be tilted 30° to the right and 30° to the left
- Adjustable depth stop
- Drilling table 500 x 740 mm, with 3 parallel T-slots
- Integrated base unit with storage compartment

400V



Price catalogue EX

2 889 €

	JDP-15-M	JDP-15-T	JDP-17-M	JDP-17-T	JRD-387A-T
Power (V / kW)	230 / 0.55	400 / 0.55	230 / 0.55	400 / 0.55	400 / 0.75
Spindle speed range (rpm)	180 – 2'900		180 – 2'900		230 – 3'100
Number of spindle speeds	16		16		9
Max. drilling diameter (ø-mm)	23		–		16
Spindle stroke (mm)	80		127		85
Spindle attachment	MK2		MK2		MK2
Spindle to column distance (mm)	190		215		140
Spindle distance to table max (mm)	470		763		540
Distance from spindle to base max (mm)	680		1'194		–
Table size (mm)	320 x 454		356 x 483		500 x 740
Mitered T-slot (mm)	13 / 270		13 / 270		14
Head tilt	–		–		30° right / 0° / 30° left
Table tilt	+/- 90°		+/- 90°		–
Dimensions (mm)	677 x 434 x 1'115		723 x 483 x 1'679		1'740 x 570 x 1'860
Weight (kg)	71		86		210
Supplied with	Self-tightening chuck + Adapter Chuck protector Service spanners Cone chaser Manuals		Self-tightening chuck 1 – 16 mm		Base with pocket Morse taper, MK2 / B16 Self-tightening chuck 3 – 16 mm / B16
DEEE	5.46	5.46	6.58	6.58	14.7
EAN	7612375514063	7612375514070	7612375513899	7612375513509	7612375536836
RANGE	J		J		J

SPINDLE MOULDERS

JWS 34KX-M / JWS 34KX-T

- Its large cast iron table (635 x 600) will offer you a large support surface.
- The Poly V belts make it easy to change speeds.
- Equipped with an attachment identical to that of the JOSS-S spindle sander, this router will give you the possibility of mounting
- Supplied with 8 and 12 mm collets, you will be able to mount the routers of the handheld routers.

230V

400V

Price catalogue EX

3 164 €



	JWS-34KX-M	JWS 34KX-T
Power (V / kW)	230 / 1.5	400 / 2.2
Spindle speed (rpm)	1'700 / 3'500 / 6'000 / 8'000	
Max. tool diameter (mm)	180	
Max. tool height (mm)	70	
Clamping height (mm)	70	
Clamping ring size For router tooling (mm)	8 / 12	
Max. Router Height (mm)	120	
Spindle diameter (ø-mm)	30	
Spindle stroke (mm)	80	
Table opening diameter (ø-mm)	160	
Table dimensions (mm)	635 x 600	
Dust port (ø-mm)	100	
Dimensions (mm)	920 x 680 x 1'090	
Weight (kg)	156	
Supplied with	30 mm shaft + spacers for tooling mounting Shaft protector 8 and 12 mm clamps for router tools Mitre fence Parallel fence Upper holding device Pusher User's manual	
DEEE	10.15	10.15
EAN	7612375526332	7612375704358
RANGE	J	

MORTISERS

719A-M

- Height adjustment of the racks in connection with the precision dovetail guide and the gas pressure compensation cylinder
- Powerful motor
- 180° swivel head for drilling a lock
- Large handwheels for easy adjustment of the coordinate table
- End stop for precision series production
- Workpiece clamping device with quick adjustment
- Closed base with storage compartment
- Table tilt angle (719AS-M only) up to 35°



230V

Price catalogue EX

1 728 €

719-AS-M

Price catalogue EX

2 075 €


230V



Hedges
Ref : 10003306

JBM-5-M

- Compact, mobile and easy to use in the workshop or on the construction site
- Robust cast iron for precise work
- With height adjustment of racks and gas pressure compensation cylinder
- Drilling lever movable
- Possibility to adjust the stop, the holding device and the depth stop
- Table top made of MDF, easy to replace
- Supplied without chisel on the picture

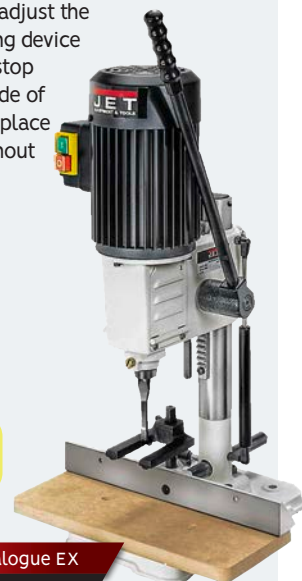

230V

Price catalogue EX

616 €

	719A-M	719AS-M	JBM5-M
Power (V / kW)	230 / 0.75	230 / 0.75	230 / 0.37
Spindle speed (rpm)	1'450	1'450	1'450
Maximum cutting size (hard / soft)	25 x 25	25 x 25	12.7 x 12.7
Max. diameter of drill chuck	13	13	10
Spindle nose to table distance (mm)	295	295	208
Max. workpiece height with extension (mm, optional)	—	—	155
Max. stroke (mm) Chisel stroke (mm)	200	200	120
Table travel (longitudinal / transverse, mm)	400 / 100	400 / 100	—
Table tilt (mm)	—	0 – 35°	—
Table dimensions (mm)	520 x 180	520 x 180	345 x 150
Table backrest dimensions (mm)	520 x 90	520 x 90	320 x 40
Gooseneck (Table spindle axis)	100	100	90
Dimensions (mm)	650 x 500 x 1'760	650 x 500 x 1'760	370 x 350 x 750
Weight (kg)	105	116	20
Supplied with	13mm Wrench Chuck Depth stop Length stop 4 chisel adapters (5/8", 3/4", 13/16" and 1.3/16") Closed base with storage compartment		10mm Wrench Chuck + Wrench Depth stop 4 chisel adapters (5/8", 3/4", 13/16" and 1.3/16") Clamp for holding workpieces MDF table top
DEEE	8.75	9.52	1.68
EAN	7612375702651	7612375528015	7612375528084
RANGE	J	J	J

AIR FILTRATION SYSTEM

AFS-1000B-M

- Easy to use air filter system for medium sized rooms
- Quiet cleaning and air filtration
- 98% filtration of all 5 micron particles and 85% of all 1 micron · of all 1 micron particles
- Depending on your choice, you can hang the air filter system from the ceiling or
- Depending on your choice, you can hang the air filter system from the ceiling or place it on your workbench
- Air flow rate (12 / 15 / 20 m³ / min) and operating time (2, 4, 8 h) are adjustable by remote control

Price catalogue EX

627 €

230V



AFS-500-M

- Quiet cleaning and air filtration
- Filters 98% of all dust up to 5 microns and 85% of all dust of all dust up to 1 micron
- Electrostatic filter on the outside and filter cartridge on the inside, easy to replace or clean by careful vacuuming
- Volume flow adjustable in 3 stages: 6 / 8 / 10 m³ / min
- Controllable exhaust air flow with louvre aerator
- Portable

Price catalogue EX

230V

437 €



AFS-400-M

NEW

- An efficient solution for small workshops, JET quality
- Infrared remote control included
- Quiet cleaning and filtering. Sucks up all dust up to 5 microns and all particles up to 1 micron
- Adjustable volume: 8, 10, 11.5 m³/hour
- Portable with handle

Price catalogue EX

248 €

230V



	AFS-1000B-M	AFS-500-M	AFS-400-M
Power (V / kW)	230 / 0.12	230 / 0.12	230 / 0.1
Air flow rate (m ³ / h)	720 / 900 / 1'200	360 / 480 / 600	480 / 600 / 690
Filter efficiency (external / internal)	5μ(External Filter) and 1μ(Internal Filter)	5μ(External Filter) and 1μ(Internal)	5μ(External Filter) and 1μ(Internal)
Remote control / timer (h)	Yes / 2, 4, 8	No	Yes / 1, 2, 4
Noise level (LpA, dB)	62 / 67 / 69	57 / 59 / 61	51 / 57 / 61
Dimensions (mm)	768 x 610 x 305	610 x 400 x 310	520 x 440 x 265
Weight (kg)	25	15	14
Supplied with	External electrostatic filter 5 microns Washable 1μinternal filter Infrared remote control, 2 AA batteries 4 lifting ring screws and 4 fixing brackets	External electrostatic filter 5 microns Internal filter cartridge 1 micron Handle	Air filtration system Infrared remote control AA batteries Eyebolts and nuts Hook and eye screws for mounting Chain for mounting
DEEE	1.785	1.05	0.87
EAN	7612375704426	7612375704419	7612375694369
RANGE	J	J	J

SUCTION SYSTEM

DC-900A-M

- Fully equipped, ideal for a professional craftsman
- Optimum suction power thanks to a powerful induction motor and 3D fan wheel
- Finely balanced steel fan wheel for quiet and vibration-free operation
- Simple bag assembly thanks to with the quick-release strap
- Robust, movable metal housing 100 mm suction hose and 3 chip bags
- incl. 3 chip bags



Price catalogue EX

424 €

230V

DC-1200-M

- Proven top product among unfiltered air extractors
- Optimum suction power thanks to powerful induction motor and 3D fan wheel
- Simple bag assembly with quick-release strap
- 4 guide wheels for mobile use

Option : Flexible PVC D100
(Ref: J-10000315 and J-10000312)



Price catalogue EX

697 €

230V

DC-1300-M

- Optimum suction performance thanks to powerful motor and specially designed fan
- Quick-release system for easy bag fitting



Made in Europe



Price catalogue EX

830 €

230V

	DC-900A-M	DC-1200-M	DC-1300-M
Power (V / kW)	230 / 0.75	230 / 1.5	230/0.75
Air flow rate (m ³ / h)	900	1'200	1'300
Vacuum (pA)	1'050	1'880	1750
Dust inlet diameter (ø-mm)	100	125	100
Hose diameter (ø-mm)	100	2 x 100	
Filter efficiency with particle size	99 %, 30 Micron	99 %, 30 Micron	
Bag capacity Collector volume (lt.)	55	150	90
Bag dimensions (mm)	600 x 900	800 x 1'100	
Noise level (LpA, dB)	78	80	
Dimensions (mm)	900 x 450 x 1'600	2'000 x 750 x 1'000	479 x 882 x 1'623
Weight (kg)	24	38	24
Options	Flexible Ø 100mm 5 m – J10000312	Flexible Ø 100 mm 5 m – J10000312	
Supplied with	3 cutting bags Suction hose Ø100 mm – 1,50 m	Filter bag, 30 Micron 1 cutting bag Y-bit, 2 x 100 mm 4 swivel castors	• 1 microfilter cartridge (2 microns) 2.5m suction hose 1 spare bag Rolling device 100mm suction nozzle
DEEE	1.68	2.8	1.68
EAN	7612375505689	7612375537154	7612375701777
RANGE	J	J	J

SUCTION SYSTEM

DC-1800-T

- 99.5% filter efficiency for fine dusts from 0.2 – 2 microns thanks to the use of high-quality «G» filter material
- Industrial motor and specially designed blower wheel for high performance
- Castors for total mobility
- Robust housing configuration
- Dust collection bags are supplied with an elastic band for easy installation



Made in Europe



400V

Price catalogue EX

1 493 €

DC-1900-A

- The only model in the JET range with 2 chip bags, the DC 1900A has a total capacity of 400 litres,
- Particularly appreciated for the volume of air it sucks in, it's sure to meet all your needs, even for heavy-duty carpentry work,
- Combined with 5 m (optional), this mobile central vacuum unit can be moved effortlessly.



Price catalogue EX

1 594 €

400V

DC-2100C

- With its powerful suction, it will meet all your needs and take on major carpentry jobs.
- Castors for total mobility
- Robust casing design
- Lower-than-average noise level for greater comfort



220V



Price catalogue EX

1 666 €

	DC-1800-T	DC-1900-A
Power (V / kW)	400/2.8	400 / 2.2
Air flow (m ³ / h)	1'800	2'900 (Ø 200) 1'180 (Ø 100)
Depression (pA)	1'750	1'800
Dust inlet diameter (Ø-mm)	140	200
Hose diameter (Ø-mm)	140	3 x 100
Filter efficiency with particle size	99% à 30 microns, G	99 %, 30 microns
Bag capacity Collector volume (lt.)	175	2 x 200
Bag dimensions (mm)		800 x 1'100
Noise level (LpA, dB)	81	82
Dimensions (mm)	1'080 x 580 x 2'090	1'550 x 760 x 2'440
Weight (kg)	45	86
Options		Flexible hose Ø 100 mm 5 m - J10000312
Supplied with	• 2-micron filter bag Collection bag Flexible hose Ø 1'40mm, 2.5m	• 2 fabric filter bags 3 x Ø100 mm Y-fitting 2 sets of 5 chip bags
DEEE	3.15	6.02
EAN	7612375700763	7612375704433
RANGE	J	J

	DC-2100C
Power (V / kW)	220 / 2.23
Motor speed (rpm)	3'450
Suction capacity	2'100
Impeller size (mm)	381
Taille de la poche	203 x 102 x 76
Switch	Magnetic
Noise level (dB)	62
Dimensions	1219 x 800 x 2108
Weight (kg)	87
DEEE	12.25
EAN	7612375690484
RANGE	U

SUCTION SYSTEM

DC-1100A-M

- Powerful universal vacuum cleaner with large suction volume and innovative Vortex-Cone technology
- Efficient induction motor designed for continuous operation
- Only very fine air and particles reach the filter zone; no drop in performance due to prematurely blocked filter blades

230V

Innovative technology cone technology



400V



Price catalogue EX

691 €

DC-1100A-T

DC-1100CK-M

- Supplied as standard with filter cartridge 2, this model will enhance the extraction of very fine particles.
- Only very fine air and particles reach the filter zone; no drop in performance due to prematurely clogged filter blades
- Efficient induction motor designed for continuous operation

Innovative technology cone technology



Includes: Cartridge
(Ref : 708739)

230V

Price catalogue EX

1 074 €

DC-1100CK-T



400V

Price catalogue EX

1 089 €

	DC-1100A-M	DC-1100A-T	DC-1100CK-M	DC-1100CK-T
Power (V / kW)	230 / 1.1	400 / 1.1	230 / 1.1	400 / 1.1
Air flow (m3 / h)	1'150 (Ø 100) – 1'620 (Ø 150)		1'150 / 1'620	
Depression (pA)	1'700		1'700	
Dust inlet diameter (Ø-mm)	150		150	
Hose diameter (Ø-mm)	2 x 100		2 x 100	
Filter efficiency with particle size	99 %, 30 Micron		99 %, 2 Micron	
Bag capacity Collector volume (lt.)	200		200	
Bag dimensions (mm)	800 x 1'100		800 x 1'100	
Noise level (LpA, dB)	80		80	
Dimensions (mm)	940 x 510 x 2'000		940 x 510 x 1'830	
Weight (kg)	48		71	
Option	Flexible Ø 100 mm 5 m – J10000312		Flexible Ø 100 mm 5 m – J10000312	
Supplied with	• Supplied with 30 micron fabric filter as standard 2 x 100 mm Y-tip 5 chip bags - Suction hose not supplied - User manual - Optional 2µm filter cartridge - filter cartridge (708739) as an option.		- Supplied as standard with 2 micron filter cartridge 2 x 100 mm Y-tip 5 chip bags - Suction hose not supplied - User manual	
DEEE	3.36	3.36	3.99	3.99
EAN	761237570440	7612375704457	7612375512557	7612375512564
RANGE	J		J	

CYCLONIC SUCTION SYSTEM

- More suction power for the same motor power, quiet during operation
- Two-stage air filtration, so the machine works more efficiently
- High-performance cyclone function, separates swarf (collected in a 250-litre metal drum) and dust
- Filter cartridge with quick-clean phase activated by a manual lever
- For rapid emptying, the drum has quick-lock systems and separate guide wheels
- Guide wheels on the unit for mobile use in the workshop
- JCDC-1.5-M : Chips are collected in a 75-litre metal drum
- JCDC-2.0-M | JCDC-3.0-T: With radio remote control, 15-metre range, with timer for 2, 4, 6, 8 hours

JCDC-15-M

230V



Price catalogue EX

2 171 €

JCDC-20-M

230V



Price catalogue EX

2 952 €

JCDC-30-T

400V



Price catalogue EX

3 840 €

	JCDC-15-M	JCDC-20-M	JCDC-30-T
Power (V / kW)	230 / 1.1	230 / 1.5	400 / 2.2
Air flow (m ³ / h)	1'527	2'160	2'540
Depression (pA)	1'350	1'600	1'700
Dust inlet diameter (ø-mm)	152	152	203
Hose diameter (ø-mm)	2 x 100	2 x 100	800 x 1'100
Filter efficiency with particle size	99 %, 2 Microns	99 %, 2 Microns	99 %, 2 Microns
Drum collection volume (lt.)	75	115	250
Noise level (LpA, dB)	76	76	76
Bag dimensions (mm)	660 x 700 (Chips) 500 x 600 (dust)	780 x 830 (Chips) 500 x 600 (dust)	980 x 1200 (Chips) 500 x 600 (dust)
Remote control / timer (h)	No	Yes / 2, 4, 6, 8 h	Yes / 2, 4, 6, 8 h
Dimensions (mm)	1'195 x 560 x 1'715	1'285 x 660 x 1'835	1'450 x 770 x 2'235
Weight (kg)	65	94	110
Supplied with	• 2 chip bags Y tip in 2 x 100 User Manual	• 2 chip bags Y tip in 2 x 100 Remote control + 2 AAA batteries	• 2 chip bags Y-tip 3 x 100 Remote control + 2 AAA batteries
Option	Flexible Ø 100mm 5 m – J10000312	Flexible Ø 100mm 5 m – J10000312	Flexible Ø 100 mm 5 m – J10000312
DEEE	5.25	6.16	7
EAN	7612375513820	7612375521122	7612375521146
RANGE	J	J	J

	Ref.	Description	Price EX	Range	EAN
	J_10000315	Flexible PVC Ø 100 mm – 2.5 m	149 €	J	7612375692624
	J_10000312	Flexible PVC Ø 100 mm – 5 m	199 €	J	3506111747379
	JW 1022	Galvanised clamping ring Ø 100 mm	11 €	J	7612375700145
	JW 1019	Hose extension fitting Ø 100 mm	14 €	J	7612375700060
	JW 1015	Y-fitting Ø 100 mm	15 €	J	7612375700152
	JW 1013	T-fitting Ø 100 mm	17 €	J	7612375700053
	JW 1017	90° elbow Ø 100 mm	20 €	J	7612375700077
	JW 1005	Universal cover Ø 100 mm – 355 x 355 mm	30 €	J	7612375700121
	JW 1001	Universal cover Ø 100 mm – 210 x 210 mm	16 €	J	7612375700206
	JW 1010	Universal cover Ø 100 mm – 158 x 158 mm	30 €	J	7612375700169
	JW 1003	Floor suction nozzle Ø 100 mm	33 €	J	7612375700190
	JW 1047	Machine connection Ø 100 mm	15 €	J	7612375700138
	JW 1039	Suction connection Ø 25 to Ø 150 mm	22 €	J	7612375700183
	JW 1000	Reduction sleeve Ø 100 to 50 mm	15 €	J	7612375692327
	JW 1053	Ground connection (12 m copper)	22 €	J	7612375692600
	JW 1007	Plastic stop valve Ø 100 mm	25 €	J	7612375700114
	JW 1142	Aluminium stop valve Ø 100 mm	22 €	J	7612375704693
	709563	Chip bags (5pcs) DC1100A/1200/1900	14 €	J	7612375701746
	10000311	Chip bags (5pcs) DC900A/DC1300	335 €	J	7612375704587
	708739	DC 1100A/DC1900 2 Filter cartridge	334 €	J	7612375701739
	10000310	Filter cartridge DC 1300	49 €	J	7612375692617
	848720	DC1100A/DC1300 30 Fabric filter	189 €	J	7612375704501
	70873110	AFS500/AFS1000B External Electrostatic Filter (10 pieces)	257 €	J	7612375680140
	J_70873405	AFS500/AFS1000B external carbon filter (5 pieces)	469 €	J	7612375704525
	J_70873305	Washable Inner Filter AFS 1000B (5 pcs)	294 €	J	7612375704563
	J_70873505	AFS 500 Indoor Filter (5 pcs)	294 €	J	7612375704563

BENCH VICES ON ROTATING BASE

 • Built for heavy duty use and long life • 360° rotating base • Ideal for everyday use and use and for craftsmen	MODEL	63300EU	63301EU	63302EU	63304EU
	Jaw width (mm)	100	125	150	200
	Vise opening (mm)	100	125	150	200
	Clamping capacity (mm)	70	75	88	100
	Tube Clamping Capacity (mm)	20 – 50	20 – 60	20 – 65	20 – 76
	Weight	10	14	19	30
	EAN	7612375800210	7612375800227	7612375800234	7612375800241
	RANGE	A	A	A	A
	Price excl.	101 €	121 €	165 €	260 €
 • Cast iron construction for heavy duty use and long life • Permanent lubrication of the slides • Ideal for maintenance workshops, car mechanics or repairs of any kind	MODEL	22300EU	22400EU	22500EU	22800EU
	Jaw width (mm)	100	125	150	200
	Vise opening (mm)	115	133	150	210
	Clamping capacity (mm)	87	95	105	115
	Tube Clamping Capacity (mm)	6 – 50	6 – 65	6 – 90	6 – 90
	Weight	17	23	29	40
	EAN	7612375800173	7612375800180	7612375800197	7612375800203
	RANGE	A	A	A	A
	Price excl.	136 €	164 €	202 €	247 €
 • Cast iron construction for heavy duty use and long life • Permanent lubrication of the slides • Ideal for maintenance workshops, car mechanics or repairs of any kind	MODEL	21300EU	21400EU	21500EU	21800EU
	Jaw width (mm)	100	125	150	200
	Vise opening (mm)	115	130	145	210
	Clamping capacity (mm)	87	95	105	115
	Tube Clamping Capacity (mm)	6 – 50	6 – 65	6 – 90	6 – 90
	Weight	19	25	32	44
	EAN	7612375800135	7612375800142	7612375800159	7612375800166
	RANGE	A	A	A	A
	Price excl.	157 €	192 €	246 €	288 €

ROLLER SERVERS ON ROTATING BASE



MODÈLE	2146	2147	2148	HRS-V
Roller width (mm)	400	400	330	250
Height settings (mm)	580 – 950	640 – 940	560 – 940	600 – 950
Number of Rollers	1	5	1 Roller, 7 balls	2 in V
Weight	6	13	5.8	17
Maximum load (kg)	70	70	50	250
EAN	7612375601909	7612375601916	7612375601923	7612375703177
RANGE	j	j	j	A
Price excl.	96€	92€	107€	179€

ENGRAVERS

DEM-0906

- Lightweight, portable, desktop CNC engraver for wood, acrylic, foam, polyester and soft metal
- Carves tool boards, tool boxes, small ornaments and many other projects
- 150 watt motor power and variable speed up to 15,000 rpm
- The engraver comes with software (easy to understand) and tools and arrives fully assembled
- Belt drive moves the X, Y and Z axes

230V



Price catalogue EX

1 975€

DEM-1717

- Portable desktop CNC engraver for wood, acrylic, foam, polyester and soft metal
- Carves tool boards, tool boxes, small ornaments and many other projects
- 200 watt motor power and variable speed up to 20,000 rpm
- The engraver comes with (easy to understand) software and tools and arrives fully assembled
- Belt drive moves the X, Y and Z axes

230V



Price catalogue EX

2 305€

DEM-2720

- Desktop CNC engraver working with wood, acrylic, foam, polyester and soft metal
- Carves tool boards, tool boxes, small ornaments and many other projects
- 200 watt motor power and variable speed up to 20,000 rpm
- The engraver comes complete with software (easy to understand) and tools and arrives fully assembled
- Belt drive moves the X, Y and Z axes

230V



Price catalogue EX

4 279€

	DEM-0906	DEM-1717	DEM-2720
Power (V / kW)	230 / 0.15	230 / 0.20	230 / 0.20
T-slot table	4	4	30
Working area (mm)	220 x 160	304 x 304	508 x 762
Z axis travel (mm)	62	101	101
Maximum travel and engraving speed (mm/min)	2500	2500	2500
Speed range (rpm)	0 - 20000	0 - 20000	0 - 20000
ER-11 tool diameter (mm)	4 (Vis BTR)	4 (Pince ER 999)	4 (Pince ER 11)
Dimensions (mm)	390 x 400 x 424	540 x 530 x 530	800 x 990 x 548
Weight	14	38	70
DEEE	0.9	2.28	4.2
EAN	761237573769	7612375753776	7612375753783
RANGE	U	U	U


TOOL BOX

A-179-EXE

1/4"

1/2"

- CNC-milled foam insert: robust, washable and with an attractive metallic look
- Canvas pockets with double stitching for maximum durability
- Fitted with original PB SWISS TOOLS screwdrivers

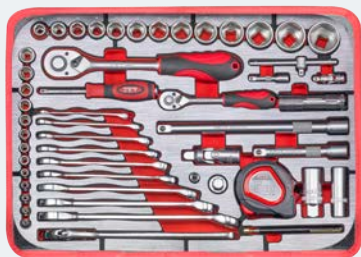

Price catalogue EX

433 €

179-PCS.



Dimensions

1/2"	10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm
1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm
	475 x 370 x 170 mm
	13 kg
EAN	7612375528381
RANGE	T

TOOL BOX

TFCO-136P

136-PCS.

1/4"

1/2"

- High-quality ergonomic tools for maximum ease of use
- Two-tone compact foam inserts to ensure a perfect fit and keep tools tidy
- Aluminium case
- 136 quality parts



Dimensions

1/2" 10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm

1/4" 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm



8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm



510 x 200 x 430 mm



13 kg

EAN 7612375696387

RANGE P

Price catalogue EX

337 €



TFCO-114P

114-PCS.

3/8"

1/4"

- Perfect for small, quick maintenance jobs / service vehicles With this box, the right tool is always at hand
- Robust case with compact dimensions



Price catalogue EX

190 €

Dimensions

3/8" 10 / 11 / 12 / 13 / 14 / 15 / 17 / 18 / 19 / 22 / 24 mm

1/4" 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 mm



8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 mm

EAN 7612375754322

RANGE P



TFCO-82P

82-PCS.

1/4"

1/2"

- Robust plastic casing, easily withstands the toughest conditions
- Ideal for any workshop, toolbox or service vehicle
- Precision manufacturing ensures that every tool has a perfect fit

TFCO-82P

1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 /	1/2"	13 / 14 / 15 / 16 / 17 / 18 / 19 / 22 / 24 / 27 / 30 / 32 mm
	3 / 4 / 5 / 6 mm	5/16"	8 / 10 / 12 / 14 mm
	4 / 5.5 / 7 mm	5/16"	5 / 7 / 8 / 10 / 12 mm
	PH1 / PH2	5/16"	PH3 / PH4
	PZ1 / PZ2	5/16"	PZ3 / PZ4
	T8 / T10 / T15 /	5/16"	T40 / T45 / T50 / T55

8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm



425 x 305 x 90 mm



6.4 kg

EAN 7612375531473

RANGE T

Price catalogue EX

150 €



TOOL BOX

Y-136C

136-PCS.


1/4"

1/2"

- Robust aluminium case
- Canvas pockets with double stitching for maximum durability
- Two-tone foam insert for excellent storage and overview
- Compact and lightweight, ideal for assembly and service work

Price catalogue EX

337 €



Dimensions

1/2"	10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm
1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	8 / 9 / 10 / 11 / 12 / 13 / 14 / 16 / 17 mm
EAN	7612375521191
RANGE	T

TOOL BOX

Y-97B

97-PCS.

- High-quality ergonomic tools for maximum ease of use
- Aluminium case
- 97 quality parts
- Weight: 10 kg

1/2"

1/4"

Price catalogue EX

293€



Dimensions

1/2"	10/13/14/16/17/18/19/20/22/24/27/30/32 mm
1/4"	4/4,5/5/5,5/6/7/8/9/10/11/12/13/14 mm
	8/10/11/12/13/14/16/17 mm
EAN	7612375516104
RANGE	T

Y-114C

114-PCS.

- Perfect for small, quick maintenance jobs / service vehicles With this box, the right tool is always at hand
- Robust case with compact dimensions

3/8"

1/4"



Dimensions

3/8"	10 / 11 / 12 / 13 / 14 / 15 / 17 / 18 / 19 / 22 / 24 mm
1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 mm
	8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 mm
EAN	7612375527933
GAMME	T

Price catalogue EX

190 €

Y-149B

Price catalogue EX

563 €

- 149 quality pieces
- With aluminium case
- With compact black foam
- Moveable on wheels

149-PCS.

Dimensions

	1/2"	10 / 13 / 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 / 27 / 30 / 32 mm
	1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
		8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm
		540 x 460 x 170 mm
		16.6 kg
EAN		7612375513035
RANGE		T

1/4"

1/2"



TOOL BOX

Y-116B

116-PCS.

1/4"

1/2"

- The ideal toolbox for maintenance and the home
- Complete selection of handy, well-balanced tools of excellent quality
- Two-tone compact foam inserts for a perfect fit a perfect fit and keep tools tidy
- Solid aluminium case



Price catalogue EX

316 €



Dimensions

1/4" 4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm

1/2" 14 / 16 / 17 / 18 / 19 / 20 / 22 / 24 mm

 8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm

EAN 7612375516135

RANGE T

Y-118W

118-PCS.

3/8"

1/4"

Special wood box

- 1/4" + 3/8" woodworking tools
- Careful selection of balanced, handy tools of the highest quality
- Solid case with reinforced corners and rigid two-tone foam interior

Price catalogue EX

463 €



Dimensions

 3/8" 10 / 11 / 13 / 15 / 17 / 19 mm

 1/4" 5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm

 8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm

EAN 7612375904048

RANGE T

STEEL BOXES

Z-715

- The set for heavy-duty work, for use wherever a particularly long lever is required
- Powerful, high-quality tools quality are the guarantee of a long service life
- Tools supplied in a sturdy sturdy metal case



3/4" ratchet square

Price catalogue EX

308 €

12-PCS.

3/4"

Dimensions

	27 / 30 / 32 / 36 / 38 / 41 / 46 / 50 / 55 / 60 mm
EAN	761237590052
RANGE	T

Z-760C/6

Price catalogue EX

303 €

60-PCS.

By order of 6 boxes



Dimensions

	1/2"	E4 / E5 / E6 / E7 / E8 / E10 / E11 / E12 / E14 / E16 / E18 / E20
		T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50 / T55
EAN		7612375692594
RANGE		T

Z-760C

Per unit

Price catalogue EX

51 €

3/8"

1/4"

1/2"

Z-782I

- Tools supplied in a sturdy metal case

82-PCS.

1/4"

1/2"

5/16"

Special dimensions in INCH

Price catalogue EX

327 €



Dimensions

	1/8" - 5/32" - 3/16" - 1/4"		5/16"		7/32" - 1/4" - 5/16" - 3/8"
	PH1 / PH2				8 / 10 / 12 mm
	PZ1 / PZ2				PH3 / PH4
	T-8 / T-10 / T-15 / T-20 / T-25 / T-30				PZ3 / PZ4
	1/4" - 5/16" - 3/8" - 7/16" - 1/2" - 9/16" - 5/8" - 11/16" - 3/4" - 7/8"				T-40 / T-45 / T-50 / T-55
EAN	7612375901573	RANGE		T	

BIT AND SOCKET SETS

- CNC-milled foam insert: robust, washable, oil-resistant and with an attractive metallic appearance
- Robust plastic casing with metal hinges and locks, easily withstands the toughest use
- Perfect for any workshop, toolbox or service vehicle
- Precision workmanship ensures that every tool has a perfect fit

X-546B

1/4"



46-PCS.

Price catalogue EX

64 €

X-31

1/2"



31-PCS.

Price catalogue EX

121 €

X-61

3/8"



61-PCS.

Price catalogue EX

124 €

X-546-B		X-31		X-61	
	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm		1/2"		3/8" 5.5 / 6 / 7 / 8 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 24 mm
	3 / 4 / 5 / 6 / 7 / 8 mm				3 / 4 / 5 / 6 / 7 / 8 / 10 mm
	4 / 5.5 / 7 mm				5.5 / 7 / 8 mm
	PH0 / PH1 / PH2 / PH3				PH1 / PH2 / PH3
	PZ0 / PZ1 / PZ2 / PZ3				PZ1 / PZ2 / PZ3
	T8 / T10 / T15 / T20 / T25 / T30 / T40				T8 / T10 / T15 / T20 / T25 / T27 / T30 / T40 / T45 / T50
	250 x 120 x 45 mm		250 x 120 x 45 mm		345 x 275 x 80 mm
	1.2 kg		1.2 kg		4.5 kg
EAN	7612375504781	EAN	7612375531428	EAN	7612375531411
RANGE	T	RANGE	T	RANGE	T

SOCKET SETS SPANNERS / PLIERS

- CNC-milled foam insert: robust, washable, oil-resistant and with an attractive metallic appearance
- Robust plastic casing with metal hinges and locks, easily withstands the toughest use
- Perfect for any workshop, toolbox or service vehicle
- Precision workmanship ensures that every tool has a perfect fit

X-582C

1/4"

1/2"



Price catalogue EX

150 €

82-PCS.

X-165

1/4"

1/2"



Price catalogue EX

326 €

165-PCS.

X-582C				X-165	
 1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm	 1/2"	13 / 14 / 15 / 16 / 17 / 18 / 19 / 22 / 24 / 27 / 30 / 32 mm	 1/4"	4 / 4.5 / 5 / 5.5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 mm
	3 / 4 / 5 / 6 mm	 5/16"	8 / 10 / 12 / 14 mm	 1/2"	10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 / 23 / 24 / 27 / 30 / 32 mm
	4 / 5.5 / 7 mm	 5/16"	5 / 7 / 8 / 10 / 12 mm		
	PH1 / PH2	 5/16"	PH3 / PH4		
	PZ1 / PZ2	 5/16"	PZ3 / PZ4		
	T8 / T10 / T15 / T20 / T25 / T30	 5/16"	T40 / T45 / T50 / T55		5 x 5.5 / 6 x 7 / 8 x 9 / 10 x 11 / 12 x 13 / 14 x 15 / 16 x 17 / 18 x 19 mm
	8 / 10 / 11 / 12 / 13 / 14 / 17 / 19 / 22 mm				
	425 x 305 x 90 mm				
	6.4 kg				476 x 388 x 108 mm
					9.9 kg
EAN	7612375531473			EAN	7612375531442
RANGE	T			RANGE	T

BIT AND SOCKET SETS

X-5106B

- Best selection of easy-to-handle and balanced tools
- Sturdy plastic case holds tools securely in place, yet easy to pick up and put down
- With «SUPERLOCK» sockets: thanks to the new corrugated inner profile of SUPERLOCK sockets, the tightening torque is 100% on the flat surface of bolts and nuts,
- 100% on the flat surface of the bolts and not on the corners.
- Prevents deformation of bolt heads
- 15% more tightening torque

1/4"

1/2"

106-PCS.

Price catalogue EX

286 €



EAN 7612375513172

RANGE T

BT-22B

- Colour-coded torsion bits in S2 quality and special shank for 30% more torque
- JET-design bit boxes: robust, functional and long-lasting
- With rubber coating «anti-slip» rubber coating

Price catalogue EX

20 €



22-PCS.

Dimensions

	PH1 / 2 x PH2
	PZ1 / PZ2 / PZ3
	2 x T10 / 2 x T15 / 2 x T20 / 4 x T25 / 2 x T30 / 2 x T40
	90 x 53 x 20 mm
	0.16 kg
EAN	7612375532227
RANGE	T

B-127-2

Price catalogue EX

73 €

- «Bit-Box» set with 127 bits and bit holders
- bits and bit holders.
- The set includes :
- SL flat bits: 3 - 4 - 4.5 (x3) - 6 - 6.5 - 7 - 8 mm
- Philips bits: PH0 - PH1 - PH2 (x5) - PH3
- Pozidriv bits: PZ1 - PZ2 (x5) - PZ3 (x2)
- Torx tamper-proof bits: T8T - T10T - T15T - T20T - T25T (x2) - T30T (x2) - T40T
- Torx Bits: T8 - T10 - T15 - T20 - T27 - T30 - T40 - T45
- Hex Bits: 1/16 - 5/64 - 3/32 - 7/64 - 1/8 - 5/32 - 3/16 - 7/32 - 1.5 - 2 - 2.5 - 4 - 5 - 6 - 7 mm
- Hexagonal Screwdriver Bits :
- H2T (x2) - H2.5T (x2) - H3T (x2) - H4T (x2)
- - H5T (x2) - H6T (x4)
- Square bits: R0 - R1 - R2 - R3
- Spanner bits: SP4 - SP6 - SP8
- Tri-Wing bits: Tri1 - Tri2 - Tri3 - Tri4
- Torq set bits: TQ4 - TQ6 - TQ8 - TQ10

127-PCS.



EAN 7612375532265

RANGE T

SETS OF BITS

BC-44B

44-PCS.

1/4"

- Perfect for every toolbox
- Bits with coloured to make handling quicker and easier
- High-quality 1/4" ratchet, slim but sturdy
- Sockets 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 mm
- Supplied in display box with 6 pcs.

Price catalogue EX

92 €



25 mm		
	1/4"	6 / 7 / 8 / 9 / 10 / 12 / 13 mm
		3 / 4 / 5 / 6
		3 / 4 / 5 / 6
		PH1 / PH2 / PH3
		PZ1 / PZ2 / PZ3
		T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375692877	
RANGE	T	

BC-53TC

53-PCS.

1/4"

Price catalogue EX

73 €



25 mm	
	3 / 4 / 5 / 6 mm
	3 / 4 / 5 / 6 mm
	2 x PH1 / 2 x PH2 / PH3
	2 x PZ1 / 2 x PZ2 / PZ3
	T10 / T15 / 2 x T20 / 2 x T25 / T27 / 2 x T30 / 2 x T40
75 mm	
	3 / 4 / 5 / 6 mm
	3 / 4 / 5 / 6 mm
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T10 / T15 / T20 / 2 x T25 / T27 / T30 / T40
	155 x 104 x 59 mm
	0.7 kg
EAN	7612375531459
RANGE	T

SETS OF BITS

B-31/12

- Robust case with rotating belt clip
- S2 quality tips

31-PCS.

Available with end caps
with holes : B-31DB

Pack of 12

Price catalogue EX

262 €



25 mm

	3 / 4 / 5 / 6 mm
	3 / 4 / 5 / 6 mm
	PH1 / PH2 (2 x) / PH3
	PZ1 / PZ2 (2 x) / PZ3
	2 x T10 / 2 x T15 / 2 x T20 / 2 x T25 / 2 x T27 / 2 x T30 / 2 x T40
EAN	7612375520873
RANGE	T

B-37

- Robust case with rotating belt clip
- S2 quality tips

37-PCS.

Price catalogue EX

85 €



25 mm

	3 / 4 / 5
	3 / 4 / 5 / 6
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T10 - 40
EAN	7612375520866
RANGE	T

B-65

- Wide choice of 25 + 75 mm end caps
- With colour identification
- Torsion» bits for 30% more torque

65-PCS.

Price catalogue EX

106 €



25 mm

	3 / 4 / 5 / 6
	3 / 4 / 5 / 6
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375520873
RANGE	T

SETS OF BITS

BC-71

- 25 + 75 mm
- Torsion» bits for 30% more torque
- Bits with distinctive sign in colour for faster quicker and easier
- Supplied in display box with 6-pcs.

Price catalogue EX

55 €

71-PCS.



1/4"

25 mm		75 mm	
	3 x 4 / 3 x 5 / 3 x 6 mm		4 / 6 mm
	3 x 4 / 3 x 6 mm		PH1 / PH2 / PH3
	3 x PH1 / 3 x PH2 / 3 x PH3		PZ1 / PZ2
	3 x PZ1 / 3 x PZ2 / 3 x PZ3		T20 / T25
	3 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T27 / 3 x T30 / 3 x T40	EAN	7612375513066
		RANGE	T

BC-86D

- 25 + 90 mm
- End caps with coloured markings for faster and easier handling
- Torsion» bits for 30% more torque
- Press-fit handles
- Quick bit holder and magnetic bit holders
- Supplied in display with 6-pcs.

Price catalogue EX

119 €

86-PCS.



1/4"

25 mm		90 mm	
	5 x 4 / 5 x 5 / 5 x 6 mm		3 x PH2
	5 x 4 / 5 x 6 mm		3 x PZ2
	5 x PH1 / 5 x PH2 / 5 x PH3		T10 / T15 / 3 x T20 / T25 / T30
	5 x PZ1 / 5 x PZ2 / 5 x PZ3	EAN	7612375532210
	3 x T10 / 3 x T15 / 3 x T20 / 3 x T25 / 3 x T27 / 3 x T30 / 3 x T40	RANGE	T

B-100-BULK

- In plastic box
- Universal bit set

Price catalogue EX

68 €

100-PCS.



1/4"

25 mm	
	4 / 5 / 6
	5.5 / 6 / 10
	PH1 / PH2 / PH3
	PZ1 / PZ2 / PZ3
	T8 / T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375901153
RANGE	T

B-25

- End caps with a length of 125 mm :
- ideal for kitchen and blind construction
- Robust plastic housing

Price catalogue EX

74 €

25-PCS.



1/4"

25 mm	
	3.5 / 4.5 / 5.5 / 6.5 mm
	PH0 / PH1 / PH2 / PH3
	PZ0 / PZ1 / PZ2 / PZ3
	T5 / T6 / T7 / T8 / T9 / T10 / T15 / T20 / T25 / T27 / T30 / T40
EAN	7612375901993
RANGE	T

SCREWDRIVER SETS

S-8

Price catalogue EX

31€

8-PCS.



EAN 7612375901214

RANGE T

S-5-SL-PZ-VDE

Price catalogue EX

26€

- High quality screwdriver with ergonomic handle
- S2 steel blades, with parallel grounding, black tip
- Protective insulation for work up to 1'000 VAC



5-PCS.

Dimensions

−	2.5 / 4 mm
+	PZ0 / PZ1 / PZ2
EAN	7612375534306
RANGE	T

S-6-TX

Price catalogue EX

29€

- High quality screwdriver with ergonomic handle
- S2 steel blades

6-PCS.



Dimensions

✳	T10 / T15 / T20 / T25 / T30 / T40
EAN	7612375534290
RANGE	T

S-6-SL-PZ

Price catalogue EX

27€

- High quality screwdriver with ergonomic handle
- S2 steel blades, with parallel grounding parallel grounding, black tip

6-PCS.



Dimensions

−	2 / 3 / 4 / 5 mm
+	PZ1 / PZ2
EAN	7612375534283
RANGE	T

SCREWDRIVER SETS

X-779

- 6 pieces of quality
- For slotted (1 4) and Phillips (Ph 1 2) screws in chrome vanadium steel
- Even with oily hands, you will have no problem holding the tools
- Wall bracket

Price catalogue EX

89 €

6-PCS.



TORQUE WRENCHES

- Impressive processing quality
- Accuracy + / - 4 %, from ISO 6789-1: 2017
- Adjustable left and right
- Delivered in a plastic box

1/4"

1/2"

3/8"



MODEL	Z-25	Z-100B	Z-200B	Z-250
Art. SAP.	1000-022-574	1000-022-575	1000-022-576	-
Square drive inch	1/4"	3/8"	1/2"	1/2"
Torque setting (Nm)	4 - 20	20 - 100	40 - 200	50 - 300
Division (Nm)	0.05	0.25	0.5	-
Length (mm)	285	438	463	600
Weight (kg)	0.54	0.9	1.02	1.8
Price excl.	112 €	116 €	120 €	127 €

RATCHETING COMBINATION SPANNERS

Q-6

- Comes in a roll-up case
- Ideal for the toolbox or service vehicle
- Adjustable left and right
- 6 pieces
- Wrenches: 8/10/12/13/17/19 mm

Price catalogue EX

82 €



Dimensions

	8 - 10 - 12 - 13 - 17 - 19 mm
EAN	7612375532272
RANGE	T

6-PCS.

COMBINATION SPANNERS AND PLIERS

X-504B

- Comes in a roll-up case
- Ideal for the toolbox or service vehicle



Price catalogue EX

52 €

4-PCS.

Dimensions

	24 / 27 / 30 / 32 mm
EAN	7612375532296
RANGE	T

X-518

- Comes in a roll-up case
- Ideal for the toolbox or service vehicle



Price catalogue EX

71 €

18-PCS.

Dimensions

	5,5 / 6 / 7 / 8 / 9 / 10 / 11 / 12 / 13 / 14 / 15 / 16 / 17 / 18 / 19 / 20 / 21 / 22 mm
EAN	7612375532289
RANGE	T

X-198

- For easy stripping of cable diameters from 0.2 to 6 mm2
- Stripping length adjustable by means of a fine adjustment screw
- For crimping insulated and non-insulated cable lugs
- Ergonomic 2-component handle for maximum power transmission
- With 197 insulated terminals



Price catalogue EX

29 €

1-PCS.

Supplied with terminal box

Dimensions

	215 x 120 x 35 mm
	0.6 kg
EAN	7612375534252
RANGE	T

X-4

- Ergonomic 2-component handles
- Hardened and ground pliers
- Contents :
 - Rib cutter, 160 mm
 - Universal pliers, 180 mm
 - Straight nose pliers, 200 mm



Price catalogue EX

54 €

4-PCS.

Dimensions

	290 x 40 x 310 mm
	1.3 kg
EAN	7612375532302
RANGE	T

DRILL BOXES - ROUTERS - STEP DRILLS

D-19GS

- HSS-G
- To DIN 338
- Ground
- Type N
- Right-hand cut
- ϕ 1.0 – 10.0 mm, at intervals of 0.5 mm

19-PCS.

Price catalogue EX

29 €

Dimensions

	170 x 115 x 40 mm
	0.56 kg
EAN	7612375903133
RANGE	A

D-25GS

- HSS-G
- To DIN 338
- Ground
- Type N
- Right-hand cut
- ϕ 1.0 – 13.0 mm, at intervals of 0.5 mm

25-PCS.

Price catalogue EX

58 €

Dimensions

	198 x 115 x 55 mm
	1.16 kg
EAN	7612375903140
RANGE	A

D-6

- HSS-G, 90
- Three teeth, 90
- Cylindrical shank
- With 3-sided cutting edges
- Ground
- ϕ 6.3 / 8.3 / 10.4 / 12.4 / 16.5 / 20.5 mm

6-PCS.

Price catalogue EX

57 €

Dimensions

	145 x 100 x 40 mm
	0.36 kg
EAN	7612375903164
RANGE	A

D-3

- ϕ 4 – 12 / 4 – 20 / 6 – 30 mm, at intervals of 2.0 mm
- With 3-sided cutting edges
- HSS with high quality TiN

3-PCS.

Price catalogue EX

74 €

Dimensions

	145 x 100 x 40 mm
	0.36 kg
EAN	7612375903171
RANGE	A

HAND TOOLS

REPLACEMENT PARTS IN GENERAL

Bits, Torx, no drilling, colour coded



- Chrome vanadium steel
- Chrome plated
- 10 pcs. in blister pack
- 1/4" drive

XB-21900339	1000-028-297	T6	Length: 25 mm
XB-21900340	1000-028-298	T7	
XB-21900341	1000-028-299	T8	
XB-21900342	1000-028-300	T9	
XB-21900343	1000-028-301	T10	
XB-21900344	1000-028-302	T15	
XB-21900345	1000-028-303	T20	
XB-21900346	1000-028-304	T25	
XB-21900347	1000-028-305	T27	
XB-21900348	1000-028-306	T30	
XB-21900349	1000-028-307	T40	

Bits, Torx, without hole, colour coded



- Chrome vanadium steel
- Chrome plated
- 10 pcs. in blister pack
- 1/4" drive

XB-21900364	1000-028-322	T6	Length: 75 mm
XB-21900365	1000-028-323	T7	
XB-21900366	1000-028-324	T8	
XB-21900367	1000-028-325	T9	
XB-21900368	1000-028-326	T10	
XB-21900369	1000-028-327	T15	
XB-21900370	1000-028-328	T20	
XB-21900371	1000-028-329	T25	
XB-21900372	1000-028-330	T27	
XB-21900373	1000-028-331	T30	
XB-21900374	1000-028-332	T40	

Bits, Torx, with hole, colour coded



- Chrome vanadium steel
- Chrome plated
- 10 pcs. in blister pack
- 1/4" drive

XB-21900357	1000-028-315	T10	Length: 25 mm
XB-21900358	1000-028-316	T15	
XB-21900359	1000-028-317	T20	
XB-21900360	1000-028-318	T25	
XB-21900361	1000-028-319	T27	
XB-21900362	1000-028-320	T30	
XB-21900363	1000-028-321	T40	

Reversible ratchet



- Forged from chrome vanadium steel
- With socket lock
- Right/left hand switch
- 2-component handle
- 72 teeth

XB-21900109	1000-027-857	Length: 160 mm
-------------	--------------	----------------

Magnetic bit holder, 1/4 inch hex



- With ejection mechanism and automatic locking

XB-21900396	1000-028-354	Length: 67 mm
-------------	--------------	---------------



- Automatic locking

XB-21900397	1000-028-355	Length: 60 mm
-------------	--------------	---------------



- Automatic locking, very slim design

XB-21900398	1000-028-356	Length: 60 mm
-------------	--------------	---------------

Swivel joint



- Chrome vanadium steel
- 4-sided M / 4-sided F

XB-21900115	1000-027-862	Length: 43 mm
-------------	--------------	---------------

Straight nose pliers

- Chrome vanadium steel
- Ergonomic 2-component handles
- Polished head

XB-21900243	1000-027-979	Length: 205 mm
-------------	--------------	----------------

Curved nose pliers

- Chrome vanadium steel
- Ergonomic 2-component handles
- Polished head

XB-21900244	1000-027-980	Length: 205 mm
-------------	--------------	----------------

Extension, flexible



- Chrome vanadium steel
- 4-sided M / 4-sided F

XB-21900111	1000-027-859	Length: 143 mm
-------------	--------------	----------------

AIR POWERED TOOLS

JAT-801-EU

- Highly durable, heat treated pistons and cylinders for improved efficiency and durability
- Ball lock retainer allows for quick tool changes
- Includes one set of needles
- Quiet for low noise operation
- Designed for the most demanding jobs; extremely long life

Price catalogue EX

395 €



JAT-121-EU

- Pneumatic impact spanner
- Composite housing improves balance and reduces weight
- Dual hammer impact mechanism improves durability with balanced force delivery
- Latest generation impact spanners
- Designed for the most demanding jobs; extremely long life
- Composite housing
- While stocks last

Price catalogue EX

394 €



JAT-323-EU

- Knock-in pawl technology results in less backlash and greater torque with less twisting force
- Patented, sealed head prevents dirt from entering the ratchet mechanism, increasing its life
- Ergonomically designed vibration absorbing handle
- Designed for the most demanding jobs; extremely long life
- Composite body
- 600 min-1 idle speed

Price catalogue EX

442 €



JAT-901-EU

- Medium length cylinder with round rod
- Gun handle with variable speed trigger
- for precise impact control during variable starts and stops
- Designed for the most demanding jobs; extremely long service life
- While stocks last

Price catalogue EX

155 €



JAT-611-EU

- Lightweight aluminium construction
- Ergonomically shaped shell handles for a good grip without fatigue
- Easy to reach, top mounted front/back switch
- Variable speed trigger for precise speed control
- Heavy duty ball bearing for durability
- With 13 mm keyed chuck

Price catalogue EX

316 €



	JAT-801-EU		JAT-121-EU	JAT-323-EU	JAT-901-EU	JAT-611-EU
Stroke length (mm)	28.6	Square (inches)	1/2"	1/2"	-	-
Number of needles	19	Max. screw size	M22	-	-	-
Needle size (mm)	3	Locking type	Ring	-	-	-
Strokes per minute	4000	Reversible	Yes	-	-	-
Average air consumption (l/min)	85	Max. torque (Nm)	1'017	-	-	-
Air intake	1/4 " NPT	Operating torque (Nm)	68 - 746	34 - 95	-	-
Internal diameter of air hose	3/8"	Idle speed (rpm)	8'500	6'000	-	8'000
Required air pressure (bar)	6.2	Strokes per minute	1'200	-	3'200	-
Vibration value (m/s²)	14.5	Air consumption (lt. / min)	190	113	85	113
Noise level (dB)	101	Air intake (NPT / inch)	1/4"	-	1/4"	-
Total length (mm)	415	Air hose (ID / inch)	3/8"	-	3/8"	3/8"
Housing material (mm)	Acier	Vibration value (m / s2)	10.6	-	8.4	-
		Noise level (dB(A))	107	-	108	91
Weight (kg)	2.73	Total length (mm)	183	291	171.5	184
		Weight (kg)	1.85	1.8	1.91	1.68
EAN	7612375 516197	EAN	7612375 516142	7612375 516593	7612375 516180	7612375 516166
RANGE	P	RANGE	P	P	P	P


WORKSHOP LIGHTS

X-828

- Essential kit for workshop, service and maintenance
- Robust and durable construction for low weight
- Flexible use thanks to strong magnets and rotating fixing hooks
- Particularly high light output thanks to COB LEDs
- Rechargeable via USB cable

Price catalogue EX

73 €

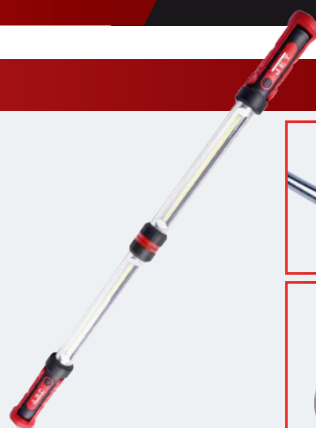

X-823

- Beam range 140 m, 200 lumens
- With 3 functions: 3 watt LED torch, COB side light bar, emergency light, red flashing light
- Magnetic base
- 3x AA batteries (not included)

Price catalogue EX

60 €



X-832

- Small and thin, this folding lamp can be easily carried in a bag, a pocket, ...
- It has a magnet on its end to put it on your machine or on your workshop if it is magnetic for example

Price catalogue EX

61 €



VOLTMETER

X-830

- AC / DC voltage measurement, 12 – 690 V
- LCD for voltage display
- LED display for continuity test



Price catalogue EX

82 €

MODEL	X-828	X-830
Battery model	Li-Ion	-
Battery capacity	2 Ah	-
Lumen	1200	-
Protection class	-	IP65
Dimensions (mm)	590 x 75 x 140	275 x 75 x 35
Weight (kg)	1.021	0.22
EAN	7612375 528107	7612375 53469
RANGE	J	J

LED SPOTLIGHT

LED-20WD

- Indoor and outdoor lighting for construction sites
- High light density, excellent illumination and 110° beam angle
- Frosted front glass, 64 SMD-DEL's
- 230 V and 24 watts
- 5m power cable
- IP65 protection rating



Price catalogue EX

103 €

LED-50W

- Long life, up to over 50,000 hours.
- High energy efficiency (AAAA+) for a wide beam of light
- Optimum IP65 protection: dustproof and splashproof to protect the LED chip
- 230 V and 50 Watts
- 120° beam angle
- 5m power cable
- IP65 protection rating



Price catalogue EX

260 €

AIR STAPLER

N-32A

- Usable staples: PREBENA E, BEA 90, DUO FAST 18, HAUBOLT KL6000

Price catalogue EX

209 €



	N-32A
Screw pitch air hose	1/4"
Air consumption (/min)	0.61
Capacity (pcs)	100
Working pressure (bar)	5 - 7.6
Chart width (mm)	5.8
Chart thickness (mm)	1.25 x 1
Dimensions (mm)	250 x 235 x 55
Weight (kg)	1.45
EAN	7612375753752
RANGE	P

COMPRESSORS

494

- With 2 handles for easy movement
- High stability with 2 front feet and oversized wheels
- Direct drive motor
- With pressure adjustment, quick coupling, motor protection switch

230V

Price catalogue EX

271 €



496

- With 2 handles for easy movement
- High stability with 2 front feet and oversized pneumatic wheels
- With thermal protection switch
- Direct drive motor
- With pressure switch, pressure adjustment, tank and air flow gauge

230V

Price catalogue EX

425 €



498

- With 2 handles for easy movement
- High stability with 2 front feet and oversized pneumatic wheels
- With thermal protection switch
- Direct drive motor
- With pressure switch, pressure regulation water separator and quick couplings

230V

Price catalogue EX

736 €



	494	496	498
Engine (V / kW)	230 / 1.1	230 / 1.5	230 / 2.2
Tank capacity (lt.)	24	50	50
Air intake (lt. / min)	230	250	290
Air flow at 7 bar (lt. / min)	110	130	165
Max. pressure (bar)	8	8	10
Cylinder	1	1	2
Speed (min-1)	2'850	2'850	1'450
Circuit breaker fuse (A)	10	10	10
Electrical cable (m)	1.5	1.5	1.5
Sound pressure level LpA (dB)	95	95	94
Dimensions (mm)	650 x 340 x 600	790 x 490 x 670	790 x 490 x 740
Weight (kg)	25	32	48
DEEE	1.5	2.1	2.88
EAN	8020119031216	8020119031230	7612375303711
RANGE	P	P	P

COMPRESSORS

C-100-330M

- Copper cooling coils
- Protective circuit breaker
- Set of wheels
- With pressure switch, pressure control, water separator and quick couplings

Price catalogue EX

857 €



C-200-330M

- Copper cooling coils
- Protective circuit breaker
- Set of wheels
- With pressure switch, pressure adjustment, water separator and quick couplings

Price catalogue EX

1 018 €



C-100-450A

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

1 468 €



C-200-540B

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, forced-air cooler, tank and air flow manometer, 2 quick couplings

Price catalogue EX

1 681 €



CL-10-235A

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

655 €



CL-20-460

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

1 700 €



C-50-420

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

1 515 €



CL-50-320

- With wheel set
- With electrical circuit breaker
- With pressure switch, pressure regulator, water separator, tank and air flow gauge, 2 quick couplings

Price catalogue EX

1 514 €



	100-330M	200-330M	100-450A	200-540B	CL-10-235A	CL-20-460	50-420	50-320
Engine (V / kW)	230 / 2.25	230 / 2.25	400 / 2.25	400 / 3.0	230 / 1.5	230 / 1.8	230 / 2.25	230 / 1.5
Tank capacity (lt.)	100	200	100	200	10	20	50	50
Air intake (lt. / min)	-	-	450	540	235	460	420	320
Air flow at 7 bar (lt. / min)	330	330	310	410	130	310	290	190
Max. pressure (bar)	10	10	10	10	8	11	11	10
Cylinder	1	1	2	2	1	2	2	3
Speed (min-1)	1'500	1'500	1'100	1'200	2800	2850	1200	1350
Circuit breaker fuse (A)	-	-	10	16	10A	10A	10A	10A
Electrical cable (m)	-	-	1.5	1.5	3	2.75	3	3
Sound pressure level LpA (dB)	74	74	72	74	89	74	72	69
Dimensions (mm)	1'100x400x830	1'460x640x1'140	880x120x460	1'510x520x970	360x350x650	450x410x800	900x470x840	810x410x660
Weight (kg)	64	102	72	98	18	31	54	49
DEEE	3.84	6.12	4.32	5.88	0.96	2.24	2.7	2.76
EAN	7612375700046	7612375754049	7612375301342	7612375301359	7612375300239	7612375700268	7612375300772	7612375754025
RANGE	P	P	P	P	P	P	P	P

SPIRAL HOSE

- Pipe size (mm): 6.5 x 10
- Material: polyurethane
- Max. working pressure (bar): 10
- Burst pressure (bar) : 20.7
- Operating temperature (°C) : - 20 / +60
- Incl. quick coupling and coupling for compressed air system ARO



Ref.	EAN	Range	Description	Price ex
98111-PU	7612375300956	P	SPIRAL FLEXIBLE 6.5x10mm x10m	31 €
98112-PU	7612375300963	P	SPIRAL HOSE 6.5x10mm x15m	43 €

HOSE REEL

- Air gun
- Air hose, 2.5 m
- Air gun
- Air paint gun
- Pneumatic spray gun



Ref.	EAN	Range	Description	Price ex
98341B	7612375523621	P	Compressed air hose reel 8 x 12 mm - 15 m	147 €
98343	7612375754056	P	Compressed air hose reel 9.5 x 13.5 mm - 20 m	226 €
98320A	7612375754070	P	Compressed air hose reel 10 x 14 mm - 16 m	340 €
98339B	7612375523614	P	Compressed air hose reel 8 x 12 mm - 10 m	146 €
98300C	7612375754087	P	Compressed air hose reel 8 x 12 mm - 9 m	216 €
98340B	7612375754063	P	Compressed air hose reel 9.5 x 13.5 mm - 30 m	238 €

TOOLAIR-KIT

- Air gun
- Air hose, 2.5 m
- Air gun
- Air paint gun
- Pneumatic spray gun



Ref.	EAN	Range	Description	Price ex
2180	7612375300857	P	1/4", 8 bar, compressed air accessory set, 5-pcs.	79 €

PUMPS FOR CLEAN WATER

- For liquids with temperatures up to +40 °C
- Housing and impeller made of technopolymer
- Pump shaft in stainless steel
- Double sealing mechanism in ceramic - graphite and oil bath
- Permanent motor cooling by means of water discharge

SPEED-30M



APPLICATIONS



Clean water



Ponds



Flooded rooms



Pits / ponds with particles solids



Pools (take into account the pH)



Regulation level by switch float switch

Price catalogue EX

243 €

230V

SPEED-MOP-30



APPLICATIONS



Clean water



Ponds



Flooded rooms



Pits / ponds with particles solids



Pools (take into account the pH)



Flat roofs and small quantities water residual water

Price catalogue EX

275 €

230V

F1-50M



APPLICATIONS



Clean water



Ponds



Flooded rooms



Pits / ponds with particles solids



Pools (take into account the pH)



Regulation level by switch float switch

Price catalogue EX

349 €

230V

	SPEED-30M	SPEED-MOP-30	F1-50M
Motor (V / kW)	230 / 0.25	230 / 0.25	230 / 0.37
Max. flow rate (lt. / h)	9'600	7'200	13'200
Max. delivery head (m)	7	7	9
Max. operating depth (m)	3	3	10
Min. dewatering level (mm)	14	2	14
Max. particle passage (mm)	—	—	—
Discharge opening	1" M / 25 mm	1" M / 25 mm	1 1 / 4" -F
Insulation class	F	F	F
Protection class	IP68	IP68	IP68
Speed (min-1)	2'900	2'900	2'900
Electrical cable (m)	10	10	10
Use at pH value	6 - 9	6 - 9	6 - 9
Dimensions (mm)	152 x 257	152 x 229	147 x 147 x 255
Weight (kg)	4.5	4.3	5
DEEE	0.205	0.195	0.275
EAN	7612375302868	7612375302882	7612375302912
RANGE	P	P	P

SURFACE PUMPS

HYDRO-NA10M

- For clean, non-aggressive water
- Suitable for small tanks, cisterns, in the garden
- For liquids up to +40°C
- Stainless steel casing and impeller
- Stainless steel pump shaft
- Double sealing mechanism in ceramic – silicon carbide and oil bath
- Permanent motor cooling by pumped water
- With thermal overload protection

230V

Price catalogue EX

790€



JET-15M-SS

230V

- For clean, non-aggressive water
- For watering gardens, plants, lawns, etc., and for cleaning purposes
- For liquids in the temperature range up to +40°C
- Stainless steel pump body, technopolymer impeller
- Stainless steel pump shaft
- Double seal mechanism with shaft seal and slip ring
- With thermal overload protection

Price catalogue EX

364€



DEHUMIDIFIERS

LE-235A-CH

230V

- Effective protection against mould, rot and metal corrosion
- High dehumidification capacity with low energy consumption
- Easy to use, automatic and maintenance-free operation
- Built-in hygrostat ensures constant humidity levels
- Water tank with level sensor and hose connection for direct water outlet
- Defrost indicator
- Nylon air filter cleans the intake air
- On trolley with 4 wheels

Price catalogue EX

444€



LE-680A-CH

230V

- For clean, non-aggressive water
- For watering gardens, plants, lawns, etc., and for cleaning purposes
- For liquids in the temperature range up to +40°C
- Stainless steel pump body, technopolymer impeller
- Stainless steel pump shaft
- Double seal mechanism with shaft seal and slip ring

Price catalogue EX

615€



	HYDRO-NA10M	JET-15M-SS
Motor (V / kW)	230 / 1.3	230 / 1.1
Max. flow (lt. / h)	4'800	4'200
Max. pressure	6 bar	5.5
Max. discharge height (m)	60	9
Max. depth of use (m)	20	
Min. drainage level (mm)	90	
Maximum particle passage (mm)	0.5	0.5
Discharge port	1 1/4" F	1" F
Insulation class	F	F
Speed (min-1)	2'900	2'900
Electrical cable (m)	20m	5m
Use at pH value	6-8	6-8
Dimensions (mm)	135 x 458	406 x 184 x 205
Weight (kg)	17.3	10.8
DEEE	0.79	0.54
EAN	7612375754018	7612375513240
RANGE	P	P

	LE-235A-CH	LE-680A-CH
Motor (V / kW)	230 / 0.3	230 / 0.45
Max. room volume	300 m³	600 m³
Max. laundry drying		30 m³
Cooling capacity	0.235 kW	0.68 kW
Water container capacity	3 lt.	7 lt.
Water container capacity	12 mm	15 mm
Air circulation	120 m³/h	430 m³/h
Air circulation	10-35°C	10-30°C
Sound pressure level LpA	41dB	53dB
Electric cable	1.8	1.8m
Type of plug	TE12	TE12
Refrigeration agent	R134a	R134a
Dimensions (mm)	270 x 310 x 575	350 x 445 x 600
Weight (kg)	13.8	20
EAN	7612375300567	7612375300574
RANGE	P	P

PUMPS FOR DIRTY WATER

- For liquids in the temperature range up to +40 °C
- Stainless steel casing and propeller
- Permanent motor cooling by discharged water
- With thermal overload protection

- Double ceramic seal mechanism – graphite and oil bath
- Level control by float

SPEED-VORTEX



APPLICATIONS



Clean water



Ponds



Swimming pools (take into account the pH)



Rooms flooded



Pits / ponds with particles



Control level by float switch

230V

Price catalogue EX

297 €

F1-50M-VORTEX



APPLICATIONS



Clean water



Ponds



Flat roofs and small quantities water residual water



Pits / ponds with particles



Swimming pools (take into account the pH)

230V

Price catalogue EX

388 €

COBRA-90M



APPLICATIONS



Clean water



Ponds



Flat roofs and small quantities water residual water



Pits / ponds with particles



Swimming pools (take into account the pH)

230V

Price catalogue EX

583 €

RANGER-MC-10/50



APPLICATIONS



Clean water



Ponds



Flat roofs and small quantities water residual water



Pits / ponds with particles



Swimming pools (take into account the pH)

230V

Price catalogue EX

992 €

	SPEED-VORTEX	F1-50M-VORTEX	COBRA-90M	RANGER-MC-10/50
Motor (V / kW)	230 / 0.37	230 / 0.37	230 / 0.6	230 / 1.5
Max. flow (lt. / h)	10'800	10'800	24'000	33000 lt./h
Max. discharge height (m)	7	7	11	10
Max. depth of use (m)	3	10	5	5
Min. drainage level (mm)	25	25	40	30
Maximum particle passage (mm)	20	20	35	50
Discharge port	1 1 / 4" / 35 mm	1 1 / 4" F	1 1 / 2" F	2» -F
Insulation class	F	F	F	F
Protection class	IP68	IP68	IP68	IP68
Speed (min-1)	2'900	2'900	2'900	2'900
Electrical cable (m)	10	20	10	10
Use at pH value	6 – 9	6 – 9	6 – 8	6–8
Dimensions (mm)	152 x 288	147 x 290	224 x 385	240 x 430
Weight (kg)	5.1	6.1	11.9	11.2
DEEE	0.25	0.3	0.585	0.59
EAN	7612375302905	7612375302929	7612375302974	7612375754346
RANGE	P	P	P	P

PUMP KITS

S.O.S.-KIT

- Practical and indispensable for quickly and efficiently evacuating water from flooded cellars or garages
- SPEED-MOP-50M Pump with pre-mounted coupling, 10 m power cable and external float switch
- Fabric hose with quick coupling, 15 m
- Filter box to prevent large deposits from interfering with the drainage



Price catalogue EX

620 €

230V

	SPEED-MOP-50M
Motor (V / kW)	230 / 0.37
Max. flow rate (lt. / h)	9'600
Max. delivery head (m)	9
Max. operating depth (m)	3 (m)
Min. dewatering level (mm)	2
Discharge opening	Camlock
Insulation class	IF
Protection class	IP68
Speed (min-1)	2'900
Electrical cable (m)	10
Use at pH value	6 - 9
Dimensions (mm)	400 x 300 x 320
Weight (kg)	9.3
DEEE	9.3
EAN	7612375528329
RANGE	I

MIXER

JTX-1200

230V

- Compact, ergonomic hand mixer
- Suitable for professional applications
- 2 speed settings (0 - 500 / 0 - 700 min-1)
- Up to 60 litres volume per mix
- Supplied with : Stirrer, mixer with M14 adaptor, connecting rod, assembly tool, 2 spare carbon brushes



Price catalogue EX

97 €

JTX-1800

230V

- Compact, ergonomic hand mixer
- Suitable for professional applications
- 2 speed settings (0 - 450 / 0 - 620 min-1)
- Up to 80 litres volume per mix
- Supplied with
- Stirrer, mixer with M14 adaptor, connecting rod, assembly tool, 2 spare carbon brushes



Price catalogue EX

167 €

	JTX-1200
Motor power (V/kW)	230 / 1.2
Speed I (rpm)	0-500
Speed II (rpm)	0-700
Turbine coupling	M14
Max volume (litres)	60
Dimensions (mm)	320 x 200 x 890
Weight (kg)	5.2
DEEE	0.511
EAN	7612375527261
RANGE	J

	JTX-1800
Motor power (V/kW)	230 / 1.8
Speed I (rpm)	0 - 450
Speed II (rpm)	0 - 620
Turbine coupling	M14
Max volume (litres)	80
Dimensions (mm)	330 x 250 x 920
Weight (kg)	5.8
DEEE	1.008
EAN	7612375527278
RANGE	I

HEATING

ZSP-2

- Compact and practical, quickly heats small and medium-sized rooms
- Heats intensely with a self-limiting ceramic PCT register

230V

Price catalogue EX

60 €



	ZSP-2
Motor power (V/kW)	230 / 2
Current (A)	8.7
Air circulation (m3/h)	90
Type of plug	T12
Dimensions (mm)	179 x 194 x 174
Weight (kg)	1.8
DEEE	0.27
EAN	7612375520194
RANGE	P

HEATERS

DHP-80000T

- Oil heater 230V/80kW with chimney, air circulation 3900 m3/h
- Fuel : Diesel, Fuel oil with anti-freeze additive
- With separate exhaust outlet (air outlet without exhaust gas)
- Flame control by photocell
- Safety thermostat in case of overheating
- Hoses (up to 12m) can be used to distribute the air in the rooms

230V

Price catalogue EX

5 567 €



DHP-48000T

- Oil heater 230V/48kW, with chimney, air circulation 1900 m3/h
- Fuel : Diesel, Fuel oil with anti-freeze additive
- With separate exhaust outlet (air outlet without exhaust gas)
- Flame control by photocell
- Safety thermostat in case of overheating
- Hoses (up to 12m) can be used to distribute the air in the rooms

230V

Price catalogue EX

2 051 €



H-2B

- Electric heater 230V, 2kW
- Automatic temperature control
- Overload protection
- Sturdy handle and stand

Price catalogue EX

122 €

230V



H-5B

- Electric heater 400V, 5kW
- Automatic temperature control
- Overload protection
- Sturdy handle and stand

Price catalogue EX

218 €

400V



H-9B

- Electric heater 400V, 9kW
- Automatic temperature control
- Overload protection
- Sturdy handle and stand

Price catalogue EX

297 €

400V



H-15B

- Electric heater 400V, 15kW, cable-free
- Automatic temperature control
- Overload protection
- Robust handle and stand

Price catalogue EX

523 €

400V



	DHP-80000T	DHP-48000T	H-2B	H-5B	H-9B	H-15B
Motor (V / kW)	230 / 0.75	230 / 0.3	230	400	400	400
Heat output (kW)	80.6	48.5	2	5	9	15
Air flow (m3/h)	3900	1900	150	500	800	1350
Consumption (kg/h)	6.8	4.9	–	–	–	–
Current	–	–	8.7A	7.2A	13A	31A
Tank capacity (L)	120	70	–	–	–	–
Electric cable (m)	1.8	1.8	2	2	2	2
Type of power plug	TE12	TE12	TE12	CEE16	CEE16	CEE32
Dimensions (mm)	1600 x 750 x 1200	1380 x 580 x 1040	300 x 240 x 360	360 x 300 x 460	350 x 370 x 500	460 x 410 x 590
Weight (kg)	152	112	4.3	5.7	9.6	14.9
DEEE	32.2	6.93	0.315	0.399	0.672	1.043
EAN	7612375504606	7612375504590	7612375304329	7612375304336	7612375304343	7612375304350
RANGE	P	P	P	P	P	P

ULTRA RECORD

- Ultra Record hand saw blades are suitable for precision work
- Super HSS molybdenum high speed steel
- Outstanding cutting performance
- Total Temple
- RANGE A

Price catalogue EX

423 €

Box of 100
Discount to be deducted



300 x 13 x 0.65	UR 8D-2	UR 8D-10	UR 8D-100
12 x 1/2 x 0.025''	UR 10D-2	UR 10D-10	UR 10D-100
	UR 12D-2	UR 12D-10	UR 12D-100

ULTRA BI HARD

- Ultra BI-HARD hand saw blades are suitable for safe working
- HSS high speed steel 8% bimetal
- Alternating teeth
- Flexible, very hard, unbreakable blade
- RANGE A

Price catalogue EX

360 €

Box of 100
Discount to be deducted



300 x 13 x 0.65	UBH 8D-2	UBH 8D-10	UBH 8D-100
12 x 1/2 x 0.025''	UBH 10D-2	UBH 10D-10	UBH 10D-100
	UBH 12D-2	UBH 12D-10	UBH 12D-100

ULTRA COBALT EDGE SCWL

- **Application:** Drilling of all common materials and metals in boiler making, mechanical engineering, maintenance, carpentry, sanitary and electrical installations.
- **Features:** HSS Bi-metal body and heavy duty hard metal head. Thick plate machined base, positive cutting teeth with variable pitch of 4/6 T reducing vibrations, depth of cut: 34-38 mm. Colour: White.

Price example
Discount to be deducted

DIAMETER	PRICE WITHOUT DISCOUNT EX
ø 24	6.5 €
ø 37	7 €
ø 52	9 €
ø 67	11.5 €





2024



PREMIUMS

WWW.TOOLFRANCE.COM



Valid from 01/01/2024 to
31/08/2024

Price EX. **Excluding transport costs
and container surcharge.**

YOUR DEALER

