

PROMAC®




Link to the website

PREMIUMS

WWW.TOOLFRANCE.COM

Valid from 01/01/2024 to 31/08/2024

Price EX. Excluding transport costs and container surcharge

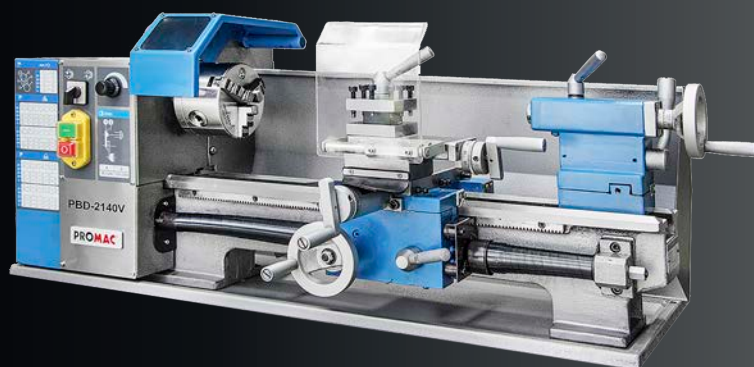

Find the whole Tool France brand in this catalogue: drills, vacuums, tool kits, band saws, grinding, etc.

TOOL FRANCE

£

BENCHTOP DRILLS

211Z

- Machine supplied with quick release chuck 1 – 16 mm
- One 75 mm vice
- Servo chuck guard
- Emergency stop on the front
- Speed change by belt
- Drilling table with 2 parallel 12 mm slots

230V



Price catalogue EX

352 £

212

- Machine delivered with self-tightening chuck
- Servo spindle protector
- Emergency stop on front panel
- Speed change by belt
- Switch with anti restart coil

230V



Price catalogue EX

429 £

212B

- Allows drilling with a wide range of tools
- The machine is precision-built.
- Qualified personnel will find no limits to its ease of use
- Manual spindle lowering
- The machine head is made from aged grey cast iron. It also guarantees precision
- Tilting table up to 45° left and right

230V



Price catalogue EX

467 £

212VLL

- Mechanical variable speed drive
- Digital speed display
- LED lighting for drilling area
- Two lasers for centring
- Key-operated chuck
- 45°D/45°G tilting table



Laser

230V



Price catalogue EX

470 £

	211Z	212	212B	212VLL
Motor (V / kW)	230 / 0.25	230/0.37	230 / 0.375	230 / 0.55
Morse taper	B16	MK2	MK2	MK2
Gooseneck (mm)	130	170	168	155
Max. steel capacity (ø-mm)	16	16	16	16
Spindle stroke (mm)	60	80	80	80
Number of speeds	5	5	12	Variable speed drive
Speed range (min-1)	600-2'600	490-2'510	230 – 2'550	450-2'500
Slot width (mm)	12	12	14	12
Dimensions (mm)	420 x 240 x 720	560 x 320 x 970	620 x 400 x 1060	500 x 235 x 935
Weight (kg)	32	45	55	45
Supplied with	13mm self-tightening chuck 75mm vice	16mm self-tightening chuck	16mm self-tightening chuck	16mm self-tightening chuck
DEEE	1.92	2.7	2.7	1.92
EAN	7612375601275	7612375520507	7612375692792	7612375694178
RANGE	P	P	P	P

BENCHTOP DRILLS

JD-3285 M/T

- LED lighting for the drilling area
- Two lasers for centring
- Servo chuck protection
- Belt-driven speed change
- 45°D/45°G tilting table

230V

400V



Price catalogue EX

961 £

JDT-2512V

- Bench drilling machine
- Electronic variable speed drive
- Digital speed display
- Tapping device (up to M 12)

400V



Price catalogue EX

2 402 £

BX-825VT

- Variable speed drive and digital speed display
- Servo-controlled chuck protector / Emergency stop on front panel
- Tapping by reversing direction of rotation
- Left / right run switch

400V



Price catalogue EX

3 002 £

378VLB

- DC motor with variable speed drive
- With 16 mm self-tightening chuck
- Cross-slotted table, adjustable by rack and pinion
- Switch with anti-restart coil
- Electrically secured belt cover
- LED lighting of drilling area

230V



Price catalogue EX

1 821 £

	JD-3285 M/T	JDT-2512V	BX-825VT	378VLB
Motor (V / kW)	230 / 0.75 400 / 0.75	400 / 0.75	400 / 0.55	230 / 1.5
Morse taper	MK3	MK2	MK3	MK2
Gooseneck (mm)	215	205	180	185
Max. steel capacity (ø-mm)	32	23	25	16
Spindle stroke (mm)	85	100	105	85
Tapping	M12	M12	M12	
Number of speeds	16	Dimmer	Variable speed drive	Variable speed drive
Speed range (min-1)	180 – 3'000	100 – 2'100	270 – 2'700	200 – 2'100
Slot width (mm)	12	14	12	12
Dimensions (mm)	850 x 350 x 1'190	1'055 x 610 x 380	850 x 350 x 1'190	1'075 x 290 x 570
Weight (kg)	125	105	125	88
Supplied with	• Self-tightening chuck MK3/ B16mm	Tool holder MK2	• Self-tightening chuck 1-16 mm Morse taper MK3	• Self-tightening
DEEE	3.66	6	8.89	5.28
EAN	7612375691948 / 7612375691955	7612375631814	7612375308717	7612375517088
RANGE	R	P	P	P

BENCHTOP DRILLS

378VB

- Variable speed drive and digital speed display
- Servo-controlled spindle guard
- Emergency stop on front panel

230V



Price catalogue EX

1 821[£]

378CLB

- Two-speed motor
- 16mm self-tightening chuck and emergency stop button
- Switch with anti-restart coil
- Belt cover secured by switch and servo-controlled chuck protector
- Cross-slotted table, adjustable by rack and pinion
- Integrated lighting

400V



Price catalogue EX

1 435[£]

STAND

2046

- Optional base for the following machines: 211Z - 212 - 370ELB - 371ELB - 378 - BX - 825VT - JD-3285
- Stable construction with door and 2 rubberised shelves 350x550x800 mm
- 26 kg



Price catalogue EX

387[£]

DRILL PRESS

JDT-3216V

- Column drilling machine
- Electronic variable speed drive
- Digital speed display
- Tapping device (up to M16)

400V



Price catalogue EX

3 328[£]

	378VB	378CLB	JDT-3216V
Motor (V / kW)	230 / 1.2	400 / 0.55	400 / 1.1
Morse taper	MK2	MK2	MK3
Gooseneck (mm)	180	165	245
Max. steel capacity (ø-mm)	20	16	32
Spindle stroke (mm)	90	85	135
Tapping	-	-	M16
Number of speeds	Variable speed drive	24	Variable speed drive
Speed range (min-1)	150 - 1'000 / 350 - 2'500	145 - 1'165 / 290 - 2'330	100 - 2'100
Slot width (mm)	12	12	T14
Dimensions (mm)	630 x 350 x 1'090	1'075 x 600 x 290	1'590 x 710 x 610
Weight (kg)	88	71	230
Supplied with	• 1-16mm self-holding chuck MK2 Morse taper	• 16mm self-holding chuck	• MK3 tool holder Chuck cl 16mm
DEEE	5.28	5.28	13.8
EAN	7612375 503746	7612375 517071	7612375 631821
RANGE	P	P	P

DRILL PRESS

DP-1000E



- Belt-driven speed change
- 5 speeds in the range 250 to 2900 rpm to suit your application
- Belt-driven head drills up to 25mm capacity in mild steel

230V




Price catalogue EX

1 448£

213A

- Servo chuck guard
- Belt-driven speed change
- 0 - 45° tilting table

230V

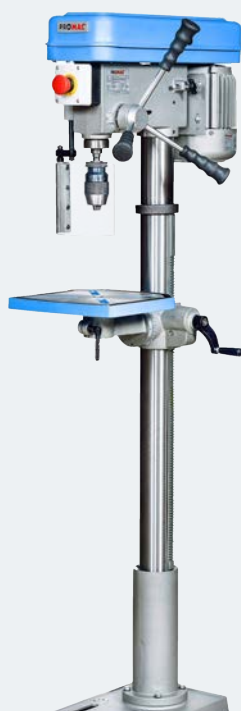

Price catalogue EX

770£

214AB/-M

- Belt-driven speed change
- Servo-controlled spindle guard
- Tilting table 0 - 45
- Large work table 428 x 475 mm
- 26 mm steel drilling

230V

214AB-M

400V

214AB



Price catalogue EX

1 391£

Price catalogue EX

1 409£

JD-32120

- Belt-driven speed change
- Servo-controlled spindle guard
- 32mm steel drilling capacity
- Tilting table 45D&C
- 360° column table rotation

230V



Price catalogue EX

2 285£

	DP-1000E	213A	214AB/-M	JD-32120
Motor (V / kW)	230	230 / 0.37	400 / 0.75 230 / 0.75	230 / 1.1
Morse taper	MK2	MK2 / B16	MK3	MK3
Gooseneck (mm)	190	180	280	280
Drilling max. R50 (ø-mm)	25	16	26	32
Spindle stroke (mm)	135	85	115	120
Number of speeds	5	12	12	12
Speed range (min-1)	250 - 2900	260-2'900	150 - 2'840	145 - 2'530
Slot width (mm)	T12	T12	T12	16
Dimensions (mm)	1'220 x 1'120 x 2'085	600 x 340 x 1'570	840 x 460 x 1'750	890 x 480 x 1'700
Weight (kg)	132	58	164	145
Supplied with	• Self-tightening chuck capacity 1-16mm	• Self-tightening chuck 1-13mm	• 1-16mm self-holding chuck Morse taper MK3	• Tool holder 16mm self-tightening chuck MK3
DEEE	7.5	3.48	9.72	9.48
EAN	7612375692105	7612375521573	7612375504453 / 7612375692648	7612375537284
RANGE	U	P	P	P

DRILL PRESS

930E

- Reversible vice table (120 mm jaws / 75 mm clamping)
- Servo-controlled chuck guard / 2-speed motor
- Lubrication system integrated into base
- Speed change via belt switch
- With restart protection coil

400V



Price catalogue EX

2 918 £

BX-834V

- Variable speed drive and digital speed display
- Tapping function by direction of rotation with selector switch 180° tilting table 120 mm opening vice
- Integrated lubrication
- Spindle with M12 bottom puller for holding tools

400V



Price catalogue EX

4 790 £

BX-840VB

- Variable speed drive and digital speed display
- Tapping function by direction of rotation with selector switch
- Integrated lubrication
- Morse taper MK4

400V



Price catalogue EX

5 970 £

BX-840VADT

- Variable speed drive and digital speed display
- Two speed ranges per mechanical gearbox
- Tapping function by reversing direction of rotation with selection switch (depth stop / switch)
- Automatic spindle lowering
- Integrated lubrication system

400V



Price catalogue EX

7 734 £

	930E	BX-834V	BX-840VB	BX-840VADT
Motor (V / kW)	400 / 0.75	400 / 1.5	400 / 2.2	400 / 1.5
Morse taper	MK3	MK3	MK4	MK4
Gooseneck (mm)	210	230	300	265
Drilling max. R50 (ø-mm)	30	32	40	40
Spindle stroke (mm)	125	140	150	150
Tapping	-	M4-M16	M4-M20	M4-M20
Number of speeds	18	Variable speed drive	Variable speed drive	Variable speed drive
Speed range (min-1)	115 - 2'470	80 - 2'500	70 - 2'000	65 - 2'000
Slot width (mm)	T12	T14	T14	T16
Dimensions (mm)	750 x 450 x 1'745	880 x 660 x 1'810	790 x 540 x 1'870	915 x 560 x 1'970
Weight (kg)	216	295	330	385
Supplied with	• Self-tightening chuck 1-16 mm Morse taper MK3	• Servo chuck protector Table / Vise 120 mm opening Self-tightening chuck 1-16 mm Morse taper MK3	• Self-tightening chuck 1-16 mm Morse taper MK4	• Self-tightening chuck 1-16 mm Morse taper MK4
DEEE	12.96	17.7	19.8	22.92
EAN	7612375608076	7612375534504	7612375534498	7612375526868
RANGE	P	R	R	R

DRILL PRESSES

TFD-26115
NEW
 **TOOL FRANCE**

- Belt-driven speed change
- Servo-controlled spindle guard
- 0-45° tilting table
- Large worktable 428 x 475 mm
- 26 mm steel drilling

3-YEAR GUARANTEE
400V


Price catalogue EX

1 540 £
TFD-32TE
NEW
 **TOOL FRANCE**

- Reversible vice table
- LED lighting for drilling area
- Two lasers for centring
- 12-speed motor
- Digital display of RPM speed and depth
- Belt-driven speed change

3-YEAR GUARANTEE
400V


Price catalogue EX

1 540 £
TFD-30TE
NEW
 **TOOL FRANCE**

- Reversible vice table (120 mm jaws / 75 mm clamping)
- LED lighting of drilling area
- 2-speed motor
- Integrated lubrication
- Belt-driven speed change

3-YEAR GUARANTEE
400V


Price catalogue EX

2 952 £
TFD-34TEV
NEW
 **TOOL FRANCE**

- Variable speed drive and digital speed display
- Tapping function by reversing direction of rotation with selector switch
- 180° tilting table + 120 mm opening vice
- Integrated lubrication
- Spindle with M12 bottom puller for holding tools

3-YEAR GUARANTEE
400V


Price catalogue EX

4 790 £

	TFD-26115	TFD-32TE	TFD-30TE	TFD-34TEV
Motor (V / kW)	400 / 0.75	400 / 1.1	400 / 0.75	400 / 1.5
Morse taper	MK3	MK4	MK3	MK3
Gooseneck (mm)	280	255	210	230
Max. steel cap (ø-mm)	26	32	30	32
Spindle stroke (mm)	115	120	125	140
Tapping	-	-	-	M4-M16
Number of speeds	12	12	18	Variable speed drive
Speed range (min-1)	150 - 2'840	150 - 2'450	105 - 2'650	80-2'500
Slot width (mm)	T12	T14	T14	T14
Dimensions (mm)	840 x 460 x 1'750	802 x 455 x 1'720	750 x 450 x 1'745	880 x 660 x 1'810
Weight (kg)	164	150	216	295
Supplied with	• Machine supplied with self-tightening chuck and servo-driven guard	Machine supplied with self-tightening chuck and servo-driven guard	Machine supplied with self-tightening chuck and servo-driven guard	• Servo chuck protector Table / Vise 120 mm opening Self-tightening chuck 1-16 mm Morse taper MK3
DEEE	8.16	8.16	13.2	17.1
EAN	7612375700039	7612375694475	7612375696370	7612375701241
RANGE	P	P	P	R

BASE DRILL

372E / 373E

- 12 speeds
- Rack and pinion adjustable head height
- Stand as standard
- Emergency stop on front panel
- Servo-controlled spindle protector

230V

400V

Price catalogue EX

1 274£



	372E / 373E
Motor (V / kW)	230 / 0,55 400 / 0,55
Spindle cone	MK2
Max. drilling Ø	16 mm
Spindle stroke	85 mm
Gooseneck	180 mm
Spindle speed	290 at 2300 Rpm
Max. table weight	100 kg
Slots	T12
Dimensions (mm)	1'840 x 390 x 730
Weight (kg)	98
Supplied with	Self-tightening chuck 1-16mm
DEEE	6
EAN	7612375528558 / 7612375521597
RANGE	P

VACUUM DRILLING MACHINE

TFC-50S

NEW



- New Tool France vacuum drill that clamps onto any flat, non-porous, non-perforated surface (stainless steel, steel of any thickness, aluminium, wood, PVC, etc.) thanks to its VACU-TEC base.
- Supplied with integrated Weldon cutter holder

Price catalogue EX

1 553£



230V

	TFC-50S
Motor (V / kW)	230 / 1.3
Milling (mm)	MK3
Length of stroke (mm)	170
VAC base (L x l x h)	300 x 140 x 21
Adsorption force (kg)	300
No-load speed (rpm)	380 and 690
Speed under load (rpm)	235 and 415
Spindle	MK3
Length (mm)	430
Width (mm)	200
Weight (kg)	442 - 590
DEEE	0.9
EAN	7612375696493
RANGE	P

MAGNETIC BASE DRILLS



Price catalogue EX

531£



230V

230V

Price catalogue EX

1 004£



	MDA-35S	MDA-50S
Motor (V / kW)	230 / 0,9	230 / 1,2
Gear (rpm)	400	235 / 425
Plug	19 mm Weldon	19.05 mm (3/4") WELDON
Adhesive force magn: Twoool force (10 mm steel) (N)	9'800	16'000
Max. steel Ø (mm)	Bits: 12-35, 1-13 mm WELDON DIN 338 and 6-13 mm bits	Milling cutters: 12-50, drills 1-20 mm
Max. depth of cut (mm)	50	50
Stroke (mm)	90	170
Magnetic support (mm)	81 x 160	84 x 168
Min. thickness (mm)	6	6
Weight (kg)	8.5	13.5
Supplied with	1 x drill guard 3x handles 1x 2.5mm hex key 1x 3 mm hex key 1x Hex key 4 mm 1x 5 mm hex key 1x lubrication system 1x safety chain Coolant device	1 x drill guard 3x handles 1x 2.5mm hex key 1x 3 mm hex key 1x Hex key 4 mm 1x 5 mm hex key 1x lubrication system 1x safety chain Coolant device
DEEE	0.51	0.9
EAN	7612375691993	7612375694161
RANGE	I	I

ACCESSORIES		RANGE	PRICE
9954	Set Promac 6 helical drills Weldon shank Depth: 30 mm (6, 7, 8, 9, 10, 11 mm) All drills	A	92.45 £
9953	Promac set 3 cutters + 1 pilot (14, 18, 22 mm) Depth: 30 mm All drills	A	82 £
9956	Set of 6 burs + 1 pilot (12, 14, 16, 18, 20, 22 mm) Depth: 30 mm All drills	A	284 £
18107	Quick-clamping drill chuck with receptacle for twist drills 1 – 13 mm (DIN 1897)	A	108 £
20202	Adaptor for FEIN bits on drills with Weldon shank	A	99 £
20203	Ejector rod suitable for art.-Nr. 20202 – only	A	37 £
20206	Extension adapter	A	199 £
20210	Adapter for use of FEIN-Quick IN shank burs on magnetic drills with Weldon socket	A	130 £
2296	Magnetic rod	A	51 £
18008	Quick-change drill chuck with Morse 2 taper for twist drills ϕ 1 – 16 mm	A	113 £
18009	Quick-change drill chuck with Morse taper 3 for twist drills ϕ 1 – 16 mm	A	118 £



MAGNETIC BASE DRILLS

MDA-35Q

Supplied with 3 milling

- 9,000 N magnetic minimum thickness of 6 mm
- Integrated lubrication
- Quick Change



Price catalogue EX

988£

230V

MDA-50Q

Supplied with 6 milling

- Additional by rack and pinion
- 12,000 N of magn. force on thickness of 6 mm thickness
- Lubrication integrated
- Quick Change



Price catalogue EX

1 553 €

230V

MDA-80Q

Supplied with 6 milling

- Additional by rack and pinion
- 16,000 N of force magnetic on thickness of 10 mm thickness
- Lubrication integrated
- Quick Change



Price catalogue EX

2 184 €

230V

MDA-35Q	MDA-50Q	MDA-80Q
230, 1.1	230 / 1.2	230 / 1.8
450	250/450	110 / 175 / 245 / 385
19 mm Weldon	MK2	MK3
9'000	12'000	16'000
Milling : 12-35, drill bits 1-6 mm DIN 338 and 6-13 mm DIN 1897	Milling : 12 - 50 mm, drills up to ϕ 16 mm DIN 338 max 20 by direct MK2 and M3 to M20 with threading device	Milling : 12 - 80 mm, drills up to ϕ 16 mm DIN 338 max 32 by direct MK3 and M30 with threading device
50	50	110
120 + 90	190 / + 100 motor side height adjustment	190 / + 100 motor side height adjustment
70 x 185	92 x 220	92 x 220
6	6	10
11.6	15	21.8
Carrying case Safety chain Coolant system Instructions for use 3x cutters 1 x diameter 14 mm / 18 mm / 22 mm + 1 ejector	Carrying case Safety chain Coolant system Quick-change MK2 Instructions for use x 6 x 30mm cutters 1 x diameter 12mm / 14mm / 16mm / 18mm / 20mm / 22mm + 1 ejector	Carrying case Safety chain Coolant system Quick-change MK3 Instructions for use x 6 x 30mm cutters 1 x diameter 12mm / 14mm / 16mm / 18mm / 20mm / 22mm + 1 ejector
0.66	0.9	1.2
7612375534979	7612375534986	7612375538823
I	I	I



- These drills can be customised to suit your needs with a range of options available.
- Please contact your local sales representative to find out more about the range and what machines are in stock.

DRILLS

NEXT22-2710-SERRM

- Drill presses
- Precise, silent and reliable
- Transmission systems with stepped pulleys or electronic variator with inverter
- Precision spindle with hardened steel Morse taper
- Machined base surface
- Ground column
- **MODEL WITH MECHANICS TABLE**
- **OTHER OPTIONS ARE AVAILABLE, PLEASE CONTACT US FOR A QUOTE**

400V

Rectangular table



Made in Italy

Price catalogue EX

CONSULT US

NEXT25-2800-SERRM

- Drill presses
- Precise, silent and reliable
- Transmission systems with stepped pulleys or electronic variator with inverter
- Precision spindle with hardened steel
- Morse taper
- Machined base surface
- Ground column
- **MODEL WITH MECHANICS TABLE**
- **OTHER OPTIONS ARE AVAILABLE, PLEASE CONTACT US FOR A QUOTE**

400V

Rectangular table



Made in Italy

Price catalogue EX

CONSULT US

ETD30-2830-SERRMA

- Drill presses
- Precise, silent and reliable
- Direct drive system
- INVERTER without changing pulleys
- Precision spindle axis with hardened steel taper
- Digital display indicating spindle speed
- Tapping with machining depth adjustment 24 V LED lighting system
- Electronic membrane control panel
- **MODEL WITH MECHANICS TABLE**
- **OTHER OPTIONS ARE AVAILABLE, PLEASE CONTACT US FOR A QUOTE**

400V

Rectangular table



Made in Italy

Price catalogue EX

CONSULT US

	NEXT22-2710-SERRM	NEXT25-2800-SERRM	ETD30-2830-SERRMA
DRILLING capacity in R50 steel (mm)	400 / 0.75	400 / 0.75	400 / 2.5
Tapping capacity in R50 steel (mm)	ø 22	ø 25	ø 30
Spindle taper	M14	M16	M20
Spindle stroke (mm)	MK2	MK3	MK3
Spindle sleeve diameter (mm)	120	120	120
Column diameter	62	62	-
Table	98	98	98
Transmission	Mechanics' table	Mechanics' table	Mechanics' table
Spindle speeds (rpm)	350 x 250	350 x 250	350 x 250
Motor power (400 V 50 Hz) kW	Pulley (PU)	Pulley (PU)	Direct transmission (invert)
T-slots	450 - 3000	164 - 2460	150 - 2230
Weight (kg)	170	185	185
DEEE	11,9	10,2	10,2
EAN	7612375753943	7612375753950	7612375753967
RANGE	R	R	R



- These drills can be customised to suit your needs with a range of options available.
- Please contact your local sales representative to find out more about the range and what machines are in stock.

DRILLS

R32-3006-SERRMAC

- Professional drill with pulley transmission system (PU)
- VS transmission for infinitely variable speed control
- Hardened and ground steel spindle
- Ground column
- MODEL WITH RECTANGULAR TABLE
- **OTHER OPTIONS ARE AVAILABLE, PLEASE CONTACT US FOR A QUOTE**

400V

Rectangular table



Made in Italy

Price catalogue EX

CONSULT US

R40PU-3606-SERRMA

- Professional drill with pulley transmission system (PU)
- VS transmission for infinitely variable speed control
- Hardened and ground steel spindle
- Ground column
- MODEL WITH RECTANGULAR TABLE
- **OTHER OPTIONS ARE AVAILABLE, PLEASE CONTACT US FOR A QUOTE**

400V

Rectangular table



Made in Italy

Price catalogue EX

CONSULT US

R45E-4200-SERRMAC

- Milourde series drill with electronic transmission and INVERTER
- Control panel with digital speed display for quick and easy setting of parameters.
- Threading by INVERTER with machining depth adjustment
- MODEL WITH RECTANGULAR TABLE
- **OTHER OPTIONS ARE AVAILABLE, PLEASE CONTACT US FOR A QUOTE**

400V

Rectangular table



Made in Italy

Price catalogue EX

CONSULT US

	R32 -3006-SERRMAC	R40PU-3606-SERRMA	R45E-4200-SERRMAC
DRILLING capacity in R50 steel (mm)	400 / 1.84	400 / 1.84	400 / 3
Tapping capacity in R50 steel (mm)	ø 32	ø 40	ø 45
Spindle taper	M20	M24	M26
Spindle stroke (mm)	MK3	MK4	MK4
Spindle sleeve diameter (mm)	135	135	145
Column diameter	62	62	72
Table	123	123	164
Transmission	Mechanics' table	Mechanics' table	Mechanics' table
Spindle speeds (rpm)	600 x 345	600 x 345	600 x 460
Motor power (400 V 50 Hz) kW	Pulley (PU)	Pulley (PU)	Changeover switch
T-slots	100 - 2200	100 - 2200 (PU)	45 - 2150
Weight (kg)	370	410	548 (TM) / 610 (TC)
DEEE	22.2	24.6	32.88
EAN	7612375754155	7612375700534	7612375700657
RANGE	R	R	R

DRILLING MILLING MACHINES

AUTOMAX-4322

- Ultra complete drilling machine
- LED lighting system
- Tool cooling system
- Numerical control that manages the 3 axes plus chuck rotation with continuous interpolation of the latter, allowing Drilling, Tapping and Milling operations with programmable machining cycles;
- Touch screen for on-board programming, with buttons for managing machining operations and digital indicators for axis positions and chuck speed;
- USB port for loading programs from the machine and additional data output for connection to a CAD/CAM system;
- The transmission is electronic and the speed variation is regulated by an inverter, directly from the touch screen;
- The X and Y axes are driven by recirculating ball screws to ensure dimensional accuracy and repeatability;
- Rapid X and Y movement speeds of up to 8 m/min, with the appropriate safety guards required for axis movements at speeds above 2 m/min.
- **MODEL WITH CROSS TABLE**
- **OTHER OPTIONS ARE AVAILABLE, PLEASE CONTACT US FOR A QUOTE**

Cross table



Made in Italy

Price catalogue EX

CONSULT US



	AUTOMAX CNC	
Motor (V / kW)	380 / 1.84	
Drilling capacity in R50 steel (mm)	Ø 32	
Tapping capacity in R50 steel (mm)	M 20	
Spindle taper	MT3	
Spindle stroke (mm)	135	
Spindle sleeve diameter (mm)	62	
Column diameter (mm)	123	
Table	Cross table	
Table dimensions (mm)	800 x 255	
Transmission	Electronics (variable speed drive)	
Spindle speeds (rpm)	100 – 2.200	100 – 1.640
Weight (kg)	810	
DEEE	56.7	
EAN	7612375754001	
RANGE	R	

VICES & MISCELLANEOUS

Slide and clamping wedge

REF	2530	9938	9249	9763	9336	9728	9337	10023	2086
Description	T8 slide	T10 slide	T12 Slide	Assorted T12 clamping blocks	T14 slide	T14 clamping block assortment	T16 slide	T16 clamping block assortment	Automatic cone chaser
Price EX-TAX	22 £	33 £	31 £	295 £	51 £	295 £	57 £	87 £	95 £
EAN	7612375684025	7612375602074	7612375602081	7612375600209	7612375602098	7612375600216	7612375602104	7612375699432	7612375602203
RANGE	A	A	A	A	A	A	A	A	A

9728 - Clamping wedges



9249 - T12 slide



2086 - Cone chaser



CM gearbox

REF	2040	2087	2088	9841
Description	MK2/CM1 reducer	MK3/MK2 reducer	MK4/MK2 reducer	MK4/MK3 reducer
Price EXTAX	22 £	23 £	39 £	30 £
EAN	7612375608229	7612375602210	7612375602227	7612375607734
RANGE	A	A	A	A

2040 - Reducer



Vices

REF	9082	9053	9083	9098	2025
Description	85 mm manual vice	100 mm manual vice	102 mm manual vice	130 mm manual vice	155 mm manual vice
Opening	83 mm	100 mm	97 mm	120 mm	130 mm
L x P x H	290 x 170 x 52 mm	165 x 190 x 57 mm	340 x 200 x 60 mm	230 x 380 x 75 mm	225 x 450 x 75 mm
Price EXTAX	110 £	66 £	104 £	146 £	265 £
EAN	7612375600049	7612375601947	7612375600056	7612375600063	7612375601954
RANGE	A	A	A	A	A

9082 - Manual vice



Quick-release vices

REF	2021	2022	2284	2021A	2167	9984	9985
Description	105 mm quick-release vice	156 mm quick-release vice	3-position vice 100 mm	105 mm sliding vice T10/T12	150 mm clamping cross table	100 mm milling vice	125 mm milling vice
Opening	105 mm	156 mm	101 mm	105 mm	130 mm	104 mm	85 mm
L x P x H	290 x 190 x 80	364 x 250 x 93	340 x 155 x 63	400 x 134 x 75	450 x 450 x 160	254 x 369 x 138 mm	150 x 345 x 135
Price EX-TAX	132 £	273 £	134 £	174 £	352 £	737 £	482 £
EAN	7612375600872	7612375601403	7612375608618	7612375631838	7612375601282	7612375600131	7612375601691
RANGE	A	A	A	A	A	A	A

2021 - Quick-release vice



9984 - Industrial vice



Drill sets

REF	DESCRIPTION	RANGE	EAN	Price EXTAX
D-19CO	Set of 19 Cobalt drill bits Sizes from 1 to 10mm by 0.5mm	A	7612375903157	57 £
D-19GS	Set of 19 HSS drill bits Sizes 1 to 10mm by 0.5mm	A	7612375903133	26 £
D-25GS	Set of 25 HSS drill bits Sizes from 1 to 13mm by 0.5mm	A	7612375903140	52 £
D-3	Set of 3 step drills 4-12/4-20/6-30mm	A	7612375903171	67 £
D-6	Countersinks 6pcs 6.3/8.3/10.4/12.4/16.5	A	7612375903164	51 £



Key chuck (supplied without adaptor)

REF	DESCRIPTION	RANGE	EAN	Price EXTAX
100390	0.5 to 13 mm B16 chuck	A	7612375602128	47 £
100395	Spare key	A	7612375605716	20 £
100392	0.5 to 16 mm chuck B16 attachment	A	7612375602135	33 £
100396	Spare key	A	7612375605723	20 £
100393	0.5 to 13 mm B18 chuck	A	7612375602142	55 £



Self-tightening chuck

REF	DESCRIPTION	RANGE	EAN	Price EXTAX
9473	0.5 to 13 mm B16 chuck	A	7612375602159	150 £
9457	1.1 to 16 mm B18 chuck	A	7612375602166	193 £



Various

REF	DESCRIPTION	RANGE	EAN	Price EXTAX
2296	Magnetic stick	A	7612375608885	51 £



Tap chuck

REF	DESCRIPTION	RANGE	EAN	Price EXTAX
2023	Machine tap holder from 4 to 12 cm².	A	7612375602180	129 £
2024	Machine tap holder from 8 to 20 MK3	A	7612375602197	176 £
2001	M2 to M6 MK2 tapping unit	A	7612375602173	370 £
18002	WELDON MK3 tiller holder	A	7612375753905	132 £
9956	Cpacks of 6 cutters (ø 12/14/16/18/20/22)	A	7612375603170	284 £
100188	Morse taper MK2/B16	A	7612375602241	12 £
9164	Morse taper MK2/B18	A	7612375602258	41 £
9778	Morse taper MK3/B16	A	7612375602265	30 £
9165	Morse taper MK3/B18	A	7612375602272	54 £
9167	Morse taper MK3/B22	A	7612375602289	59 £
2037	Morse taper CM1/B16	A	7612375605839	23 £
9877	Morse taper MK4/B18	A	7612375601397	61 £
2046	Base for bench drill	A	7612375602234	387 £
2064A	230V lubrication KIT	A	7612375602326	486 £
2065A	400V lubrication KIT	A	7612375602333	486 £

9877 - Morse taper



2023 - Tap holder



2001 - Tapping device



DRILLING, MILLING AND TAPPING MACHINES

JMD-1-M

- Micrometric lowering of the spindle
- Bottom puller M10 / self-tightening chuck
- 1 – 10 mm / MK2 morse taper
- 45° tiltable D&G
- Variable speed drive / two speed ranges per mechanical gearbox

230V



Price catalogue EX

792 £

JMD-3-M

- Brushless motor / mechanical gearbox
- Digital display / electronic speed control
- Left / right hand operation with M12 tapping function
- Precise spindle adjustment with digital depth display
- 90°D and 45°G tilting head
- Micrometric lowering of the spindle
- M12 bottom puller / servo chuck protection
- Base: 5000056-G (option)

230V



BRUSHLESS MOTOR

Price catalogue EX

3 177 £

FX-820VA

- Digital speed display
- 45° right and 45° left tilting head
- Precise spindle adjustment with digital depth display
- Precise X and Y adjustment
- Servo chuck guard / cone MK2 morse taper / M10 bottom puller

Tray recoverer 2298
in option : 41£ EX

Base 2297

230V



Price catalogue EX

2 149 £

	JMD-1-M	JMD-3-M	FX-820VA
Motor (V / kW)	230 / 0.15	230 / 1	230 / 0.75
Morse taper	MK2	MK3	MK2
Steel capacity (ø-mm)	10	25	20
Tapping	-	M12	-
Spindle stroke (mm)	30	70	50
Surface milling capacity (mm)	20	50	63
Number of speeds	Dimmer	Dimmer	Dimmer
Speed range (min-1)	0-2'000	100-1'800	300 - 1'150 / 600 - 2'300
X-axis, longitudinal stroke (mm)	190	400	480
Y-axis, transverse stroke (mm)	100	150	175
Z-axis, vertical stroke (mm)	265	300	280
Gooseneck (mm)	140	230	160
Table dimensions (mm)	145 x 240	160 x 510	700 x 180
T-slots (mm)	T8	T12	T12
Dimensions (mm)	550 x 450 x 630	700 x 560 x 850	860 x 550 x 860
Weight (kg)	40	165	122
Supplied with	10 mm drill holder with MK2 chuck Drive bar M10 Servo chuck protection Instructions for use	13 mm drill holder with MK3 chuck Drive bar M12 Servo chuck protection Instructions for use	1 bottom puller M10 1 set of spanners 2.5, 3, 4, 5, 6 mm 2 sliding blocks T12 mm 1 adapter CM II / B 18 1 open-end spanner 17 / 19 mm 2 screwdrivers (slot + PH) 1 tool driver
DEEE	2.4	9.9	8.1
EAN	7612375503982	7612375504002	7612375608991
RANGE	P	I	I
Option	Spare parts list		Base reference 2297

DRILLING, MILLING AND TAPPING MACHINES

PBM-1839V

- Mechanical gearbox / variable speed drive 100-2000 rpm
- Large 700 x 160 mm cross table
- Emergency stop on front panel
- Digital speed display
- Switch with anti restart coil

230V



Price catalogue EX

2 519 £

JMDT-763016

- Belt drive
 - Large table 730 x 210
 - DRILLING max steel 30
 - Spindle stroke 120
 - Tapping M16
 - End milling 76
 - **OPTIONAL : STAND ref : 763016STAND**
- =313 £

230V



Price catalogue EX

2 946 £

JMD-45PFD-T

- Automatic lowering of the spindle
- Left/right running with reversal of direction of rotation M20 threading
- 3 axis spindle / 2 speed motor
- Head on dovetail adjustable in height, tiltable 90°G and 30°D
- Supplied with M12 bottom puller

Base 350045-G : 402 £ EX

400V



Price catalogue EX


7 250 £

	PBM-1839V	JMDT-763016	JMD-45PFD-T
Motor (V / kW)	230 / 0.75	230 / 1.5	400 / 1.1
Morse taper	MK3	MK3	ISO-30
Steel capacity (ø-mm)	20	30	32
Tapping	-	M16	M20
Spindle stroke (mm)	70	120	107
Surface milling capacity (mm)	50	76	100
Number of speeds	Dimmer	12	12
Speed range (min-1)	100 - 2'000	100 - 2'080	50 - 2'500
X-axis, longitudinal stroke (mm)	400	500	520
Y-axis, transverse stroke (mm)	190	210	210
Z-axis, vertical stroke (mm)	260	440	460
Gooseneck (mm)	190	200	250
Table dimensions (mm)	700 x 160	730 x 210	825 x 240
T-slots (mm)	T12	T14	T16
Dimensions (mm)	790 x 640 x 855	950 x 760 x 1'150	1'080 x 1'010 x 1'300
Weight (kg)	110	280	332
Supplied with	13 mm drill holder with MK3 chuck Drive bar M12 Servo chuck protection Instructions for use		Vise 85 mm, swivel Drill bit holder 13 mm with ISO-30 chuck HM milling cutter, diam. 75 mm / drive bar M12
DEEE	6	16.8	20.4
EAN	7612375531091	7612375631456	7612375503845
RANGE	I	R	R
Option	Spare parts list	Base reference 763016STAND	Base reference 350045-G

DRILLING, MILLING AND TAPPING MACHINES

JM-125DRO

- HURON-type milling head, 360° tiltable
- Coolant system + LED light as standard
- 3-axis viewfinder, integrated into the control panel, rotatable to R and L
- Automatic feeds on X, Y and Z axes + rapid feeds
- Ø 40 cast iron and Ø 32 steel drilling
- 400V / 3Kw
- 1370 x 300 table

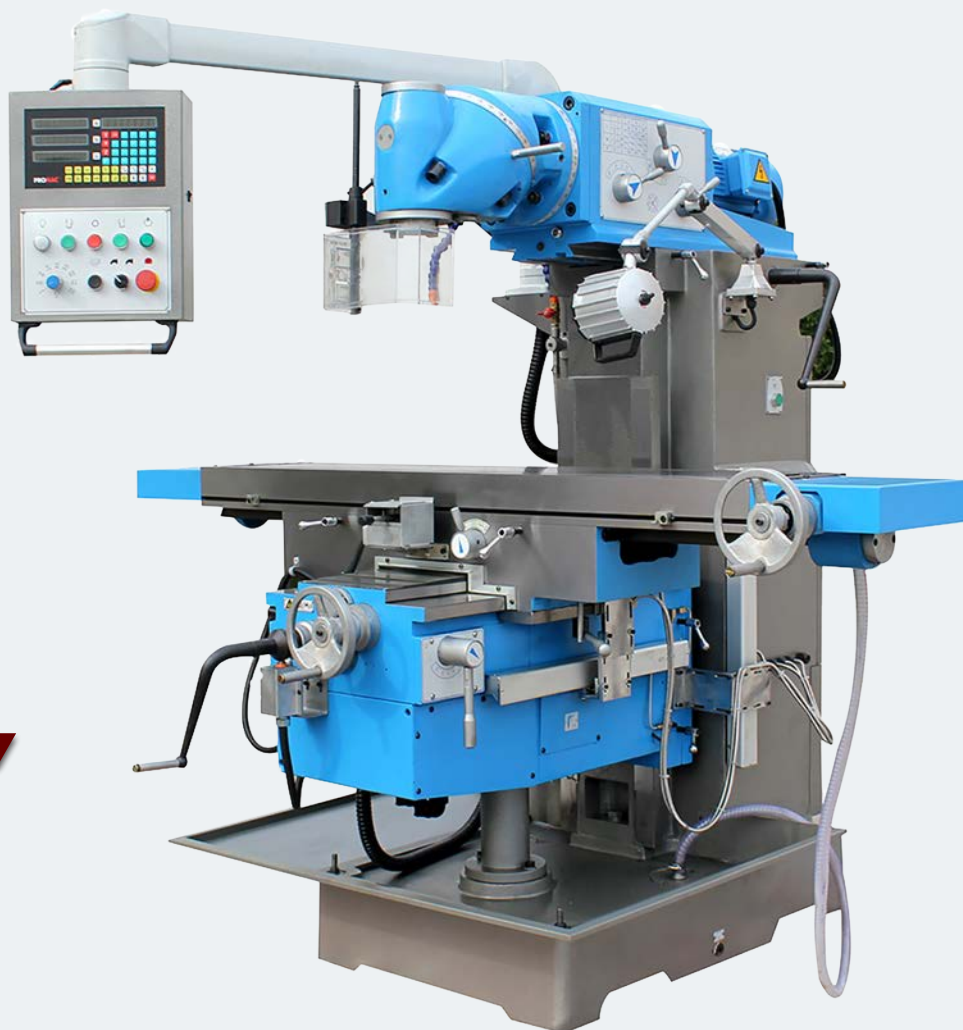

400V

Price catalogue EX

20 970[€]

	JM-125DRO
Motor (V / kW)	400 / 3
Morse taper	ISO 40
Max. steel capacity (Ø-mm)	32
Tapping	M16
Spindle stroke (mm)	-
Surface milling capacity (mm)	Ø 125
Number of speeds	11
Speed range (min-1)	45 - 1660
X-axis, longitudinal stroke (mm)	1000
Y-axis, transverse stroke (mm)	380
Z-axis, vertical stroke (mm)	400
Gooseneck (mm)	100 - 500
Table dimensions (mm)	1370 x 300
T-slots (mm)	T14
Dimensions (mm)	1830 x 1760 x 1700
Weight (kg)	1750
Supplied with	Lubrication system Original DRO Instructions for use
DEEE	102
EAN	7612375691511
RANGE	R

DRILLING, MILLING AND TAPPING MACHINES

JMDT-764016X

NEW

- Mechanical gearbox
- 730 x 210 table (standard)
- DRILLING max steel 40
- Spindle stroke 130, Z adjustment by the head and by the table (racks)
- 180° tilting head
- **New on this machine: the X-axis (longitudinal) feed is mounted as standard**

400V



Price catalogue EX

4 621€

JMDT-804516XDRO

NEW

- Mechanical gearbox
- 3-axis screwdriver / speed variator
- Manual and micrometric spindle lowering
- Integrated lubrication
- Reversal of direction of rotation M16 thread
- 180° tilting head
- **New on this machine: the X-axis (longitudinal) feed is mounted as standard**

400V



Price catalogue EX

6 120€

	JMDT-764016X	JMDT-804516X-DRO
Motor (V / kW)	400 / 1.5	400 / 1.5
Morse taper	MK4	MK4
Max. steel capacity (ø-mm)	40	45
Tapping	M16	M16
Spindle stroke (mm)	130	120
Surface milling capacity (mm)	ø76	80
Number of speeds	12	Dimmer
Speed range (min-1)	75 - 3200	75 - 2'500
X-axis, longitudinal stroke (mm)	370	560
Y-axis, transverse stroke (mm)	180	190
Z-axis, vertical stroke (mm)	610	350
Gooseneck (mm)	280	245
Table dimensions (mm)	730 x 210	800 x 240
T-slots (mm)	T14	T14
Dimensions (mm)	830 x 760 x 1'885	1280 x 1240 x 2'100
Weight (kg)	350	400
Supplied with	1 chuck from 0 to 13 mm with tool holder DIN 228 MK4 B16 1 combination toolholder DIN 6362 for 2 and 3 size keyway cutters / Morse taper DIN 228 (MK4 / B16)	Adapter MK4 / B16 Bottom puller M16 Servo chuck protector 1 chuck from 0 to 13 mm with tool holder DIN 228 MK4 B16 1 combination toolholder DIN 6362 for milling cutter 2 and 3 sizes with keyway / Morse taper DIN 228 (MK4 / B16)
DEEE	21	29.4
EAN	7612375694345	7612375694352
RANGE	R	R

VERTICAL MILLING MACHINES

VM-1054-3

- Variable speed in 400 V (80 to 3800 rpm)
- 254 x 1372 mm table
- Heavy duty platform for improved machining
- Dual axis digital readout as standard
- Micron accurate digital readout
- 45° front/rear and 90° left/right swivel angle

Price catalogue EX
consult us



380V

VM-1258-3

- Variable speed at 400 V (80 to 3800 rpm)
- 305 x 1474 mm table
- Heavy duty platform for improved machining
- Dual axis digital readout as standard
- Micron accurate digital readout
- 90° swivel angle

380V

Price catalogue EX
consult us



	VM-1054-3	VM-1258-3
Motor (V)	380	380
T-slots (mm)	16 x 3 x 63	16 x 3 x 63
Max table load (kg)	250	350
Automatic stroke X x Y x Z (mm)	820 x 400 x 406	1120 x 380 x 450
Manual travel X x Y x Z (mm)	900 x 400 x 406	1130 x 400 x 450
Spindle taper (din)	2080	2080
Spindle ø (mm)	100	100
Spindle speed (rpm)	80 - 3800 per dimmer	80 - 3800 per dimmer
Swivel angle	45° (FT/BK) 90° (L/R)	90° (L/R)
Spindle nose to table (min/max) (mm)	40 - 445	35 - 485
Spindle centre to column (mm)	200 - 680	130 - 550
Head cross travel (mm)	480	420
Coolant pump (HP)	0.125	0.125
Dimensions (mm)	1524 x 1524 x 2210	1778 x 1550 x 2312
Weight (kg)	1364	1700
DEEE		
EAN	5060473194777	5060473194794
RANGE	U	U

HYDRAULIC RADIAL DRILL

RD-1600H

400V

- The RD-1600H hydraulic radial drill is a real production machine, with a drilling capacity of 50 mm.
- Automatic lowering
- Large 1600 mm radial arm

Price catalogue EX
consult us



RD-1000M

400V

- Its heavy-duty construction enables you to ensure intensive industrial production
- It is equipped with a motorised decenter
- MK4 attachment
- Gooseneck from 200mm to 1'000mm
- Supplied with a grooved table extension


Price catalogue EX
consult us



	RD-1600H	RD-1000M
Motor (V/kW)	400 / 3.8	400 / 3
Max drilling capacity	50 mm	40mm
Column ø (mm)	350	240
Morse taper	MK5	MK4
Spindle stroke (mm)	315	250
Spindle speeds	25 à 2000 rpm	70 à 1800 rpm
Dimensions (mm)	2490x1020x2620	1'730x750x2'360
Weight (kg)	4350	1'700
DEEE	300.3	81.2
EAN	7612375754230	7612375754223
RANGE	U	U

Slide and clamping block

REF	DESCRIPTION	EAN	RANGE	PRICE EX
50000036	55x75mm TRESTLE ON TURNABLE BASE (JMD-1)	7612375500738	A	140 £
50000038	MANDREL HOLDER MK2/Ø13mm	7612375500752	A	154 £
50000026	DIVIDER PLATE	7612375500639	A	574 £
50000027	SET OF 6 PINS(MK2)3,4,5,6,8,10mm	7612375500646	A	121 £
9667	PLIERS HOLDER BOX MK3/ER32 – 6 PLIERS(6,8,10,12,16,20)	7612375602230	A	689 £
50000060	SET OF 7 MK3 PLIERS (4,6,8,10,12,14,16mm)(JMD-3)	7612375500820	A	301 £
50000029	DIVIDING DISCS FOR TRAYS 50000026	7612375500820	A	133 £
50000033	3-STAND 80mm (JMD-1/JMD-2)	7612375500707	A	173 £
50000034	4-STAND 80mm (JMD-1/JMD-2)	7612375500714	A	161 £
50000032	COUNTER PLATE (JMD-1/JMD-2)	7612375500691	A	26 £
50000031	COUNTER SPIKE FOR TRAY 50000026	7612375500684	A	133 £
50000037	SET OF 6 HSS CYLINDRICAL SPINDLES – (3,4,5,6,8 and 10)	7612375500745	A	56 £
50000065	DIVIDER TRAY Ø150mm (JMD-3)	7612375500875	A	711 £
50000066	DIVIDER DISC SET D150mm	7612375500882	A	171 £
50000915	4-BIT MANDREL Ø100mm (BD-7/BD-8)	7612375502046	A	221 £
50000067	COUNTER DOLL FOR 50000065	7612375500899	A	278 £
50000057	DRILLING TABLE HORIZONTAL MILLING	7612375500790	A	290 £
50000063	SLOTTED TABLE WITH ANGLE ADJUSTMENT	7612375500851	A	238 £
9850	TABLE DIVIDER 150mm	7612375600155	A	725 £
9851	DIVIDER DISC SET FOR 9850	7612375601985	A	251 £
9853	AGAINST DOLL FOR 9850	7612375602005	A	278 £
9854	DIVIDING PLATE 100mm	7612375600193	A	1 248 £
2065A	LUBRICATION SYSTEM 400/50/3	7612375602333	A	486 £
50000105	PLIERS CASE	7612375501186	A	563 £
50000104	SA-30/B16 ADAPTER (JMD-45PFD)	7612375501179	A	107 £
50000028	T 8 slide	7612375500653	A	294 £
9249	T 12 slide	7612375602081	A	31 £
9763	T12 slide and wedge	7612375600209	A	295 £
9336	T 14 slide	7612375600209	A	51 £
9728	T14 slide and wedge	7612375600216	A	295 £
9337	T 16 slide	7612375602104	A	57 £
10026	T16 slide and wedge	7612375602067	A	400 £
9984	Milling turntable vices 127 x33 mm opening 108 MM	7612375600131	A	737 £
9985	MILLING TOOL 125mm	7612375601691	A	482 £
9908	100mm MILLING TOOL	7612375600117	A	363 £
2297	BASE FX 820VA	7612375753837	A	298 £
2298	FX-820VA RECOVERY TRAY	7612375753844	A	41 £
50000056-G	BASE JMD-3	7612375500783	A	593 £
2001	TAPPING DEVICE 2-6mm(MK2)	7612375602173	A	370 £
2086	AUTOMATIC CONE FLUSH	7612375602203	A	95 £
2087	MK3/MK2 REDUCER	7612375602210	A	23 £
2088	MK4/MK2 REDUCER	7612375602227	A	39 £
9667	PLIERS HOLDER BOX MK3/ER32 – 6 PLIERS(6,8,10,12,16,20)	7612375602230	A	689 £
9982	MILLING KIT MK3 – **9165+9457+9667+9728+9908**	-	A	980 £
2023	MACHINE HOLDER MK2 (4-12mm)	7612375602180	A	129 £
2024	MACHINE HOLDER MK3 (8-20mm)	7612375602197	A	176 £
9165	MK3/B18 ADAPTER	7612375602272	A	54 £
9457	SELF-REINFORCING MANDREL 1-16mm/B18	7612375602166	A	193
MK2-0113	SELF-TIGHTENING CHUCK 1-13	7612375753851	A	189 £
MK3-0113	CHUCK 1-13	7612375753868	A	189 £
MK4-0113	CHUCK 1-13	7612375753875	A	189 £
MK3-0316	SELF-TIGHTENING CHUCK 1-16	7612375753882	A	189 £
MK4-0316	CHUCK 3-16	7612375753899	A	189 £



PORTABLE CIRCULAR SAWS

308C

- 355 mm diameter abrasive cutting machine
- Light, powerful & easy to handle / dry cutting
- For steel, aluminium & non-ferrous alloys
- Cutting capacity in mm

Price catalogue EX

346 £

CUTTING CAPACITY IN MM

90° 120 mm
45° 90 mm

90° 108 mm
45° 55 mm

90° 241 x 63 mm
45° 90 x 50 mm

230V



309C

- 355 mm dia.
- carbide-tipped cut-off machine
- Ideal for clean cuts in steel; stainless steel aluminium & non-ferrous alloys; dry cutting

Price catalogue EX

1 035 £

CUTTING CAPACITY IN MM

90° 130 mm
45° 90 mm

90° 115 mm
45° 55 mm

90° 115 x 95 mm
45° 90 x 50 mm

230V



VERTICAL BAND SAW

BSV-20VS



- Gooseneck depth 520mm
- Maximum thickness 310mm
- Variable speed pulley system
- A versatile tool thanks to its variable speed system, the BSV-20VS can be used to cut: wood, metal and even plastic.
- Straight cuts, mitre cuts and all types of edging

220V

380V



Price catalogue EX

Consult us

	308C	309C	BSV-20VS
Motor (V / kW)	230 / 2.2	230 / 2.2	220/1.5 380/1.5
Blade speed (RPM)	3'900	1'300	65
Blade size (ø, mm)	355 x 25.4 x 2.8	355 x 25.4 x 2.6	3880 x 16 x 0.8
Tilting vice	no	45°	5° left, 15° right
Vise opening (mm)	120	120	-
Noise Level (Db)	103	103	-
Dimensions (mm)	300 x 600 x 700	300 x 600 x 700	1'450 x 1'100 x 2'140
Base (yes / no)	optional (base ref: 10048)	optional (base ref: 10048)	450
Weight (kg)	17	24	450
Supplied with	Cut-off wheel ø 355 x 25.4 x 2.8 mm Instruction manual	• Carbide pellet blade ø 355 mm x 25.4 x 2.6 mm in 70 teeth Instruction manual & service keys	Tape cutting equipment Tape welding Welding grinding
DEEE	1.2	1.38	45.6
EAN	7612375600483	7612375600339	2060473192168 / 7612375754490
RANGE	P	P	U

CIRCULAR SAWS

SY- 225V

- Smooth speed control
- For straight mitre cuts
- Lubrication system included for clean work
- Cutting capacity Ø 67mm
- Variable speeds

Price catalogue EX

944€

230V

- Accessories :
- 50000201 BLADE 225/2/32 160dts/4
- 9123 BLADE 225/1.9/32 120dts/6
- 9124 BLADE 225/1.9/32 140dts/5
- 9125 BLADE 225/1.9/32 180dts/4

2181 - BASE

Adaptation

Price catalogue EX

320£

CUTTING CAPACITY IN MM

90°	67 mm
45° Right	60 mm

90°	65 mm
45° Right	60 mm

90°	70 x 56 mm
45° Right	60 x 50 mm

90°	30 mm
45° Right	25 mm

	SY-225		SY-225
Motor (V / kW)	230 / 1.5	Dimensions (mm)	330 x 510 x 430
Pump motor (kW)	0.032	Weight (kg)	20
Variable speed (min ⁻¹)	30 - 85	Supplied with	• Blade
Blade speed (m/min)	17.5 - 60	DEEE	1.2
Toothing	180D	EAN	7612375605495
Blade size (mm)	225 x 2 x 32	RANGE	R
Vise opening (mm)	75		

DISC SAW

TH-33

- Base and cut-off wheel
- 24-volt controls
- Quick-clamping vice with 115 mm opening

Price catalogue EX

4 463 £

400V

CUTTING CAPACITY IN MM

90°	120 mm
45°	105 mm

90°	95 x 95 mm
45°	80 x 80 mm

90°	115 x 90 mm
45°	80 x 90 mm

	TH-33		
Motor (V / kW)	400 / 5.5	Supplied with	Base and cut-off wheel 24-volt controls Quick-clamping vice with 115 mm opening
Blade speed (TPM)	4'100	EAN	7612375521528
Blade (ø-mm)	350	DEEE	9.36
Working height (mm)	965	RANGE	R
Base	Yes		
Dimensions (mm)	520 x 840 x 560		
Weight (kg)	160		

CIRCULAR SAWS

SY-315 / SY-315L

- 2-speed motor
- Reduced blade speed for cutting alloy steels and solid materials
- Thermal overload protection
- 120 mm quick-clamping vice
- For left and right mitre cuts
- Lubrication system
- Supplied with saw blade
- SY-315L has a low speed for cutting solid materials and stainless steel

SY-315L SPECIAL STAINLESS STEEL

400V

Price catalogue EX

3 110 £

CUTTING CAPACITY IN MM



90° 100 mm
45° Right 90 mm
45° Left 90 mm



90° 82 mm
45° Right 80 mm
45° Left 80 mm



90° 100 x 70 mm
45° Right 85 x 70 mm
45° Left 85 x 70 mm



90° 50 mm
45° Right 50 mm
45° Left 50 mm

SY-350V

- Electronic variable speed drive
- Thermal overload protection
- 90° head rotation for notching
- 170 mm quick-clamping vice
- For left and right mitre cuts
- With lubrication system
- Supplied with saw blade
- Digital speed display

400V

Price catalogue EX

5 222 £

CUTTING CAPACITY IN MM



90° 120 mm
45° Right 100 mm
45° Left 100 mm



90° 105 mm
45° Right 85 mm
45° Left 85 mm



90° 160 x 90 mm
45° Right 85 x 70 mm
45° Left 85 x 70 mm



	SY-315 / SY-315L	SY-350V
Motor (V / kW)	400 / 1.3	400 / 2.25
Blade speed (TPM)	44/88 22/44	24 / 120
Cutting angle	45°L / 45°R	45°L / 45°R
Blade (ø-mm)	315	350
Working height (mm)	960	985
Base	Yes	Yes
Dimensions (mm)	690 x 1'100 x 1'750	1'020 x 990 x 1'830
Weight (kg)	160	250
Supplied with	Saw blade Lubrication system	Saw blade Lubrication system
DEEE	9.6	15
EAN	7612375536799 / 7612375605525	7612375607659
RANGE	R	R

PORTABLE SAWS

349V or 349V2

- Portable manual band saw
- Variable speed
- For dry cutting
- Light, powerful and precise
- Variable speed (38–80 mm)
- 60° swivel bow R

CUTTING CAPACITY IN MM

90°	125 mm
45° Right	80 mm
60° Right	50 mm

90°	125 mm
45° Right	80 mm
60° Right	50 mm

90°	125 x 125 mm
45° Right	80 x 80 mm
60° Right	50 x 50 mm

230V

Price catalogue EX

626 £



348C

- Metal cutting bandsaw with assisted descent
- 45° straight cut by rotating the bow

Price catalogue EX

830 £

230V

CUTTING CAPACITY IN MM

90°	100 mm
45° Right	75 mm

90°	100 mm
45° Right	75 mm

90°	100 x 150 mm
45° Right	60 x 100 mm



347V

230V

- Band saw with variable speed drive
- Straight 45° cut by rotation of the bow

Price catalogue EX

563 £

CUTTING CAPACITY IN MM

90°	100 mm
45°	65 mm

90°	105 mm
45°	65 mm

90°	105 x 100 mm
45°	65 x 60 mm



351V

20 mm tape

- Band saw with variable speed drive
- 60° straight cut by rotating the bow
- 20 x 0.9 mm section band

Price catalogue EX

1 386 £

230V

CUTTING CAPACITY IN MM

90°	166 x 150 mm
45°	130 x 150 mm
60°	75 x 75 mm

90°	170 mm
45°	125 mm
60°	75 mm

90°	166 mm
45°	130 mm
60°	75 mm



	349V / 349V2	348C	351V	347V
Motor (V / kW)	230 1 / 0.6	230 / 0.37	230 / 1.65	230 / 0.85
Bands speed (m / min-1)	38 to 80 per drive	45	38 to 80 per drive	38 to 80 per drive
Bands dimensions (mm)	1435 x 12.7 x 0.65	1'470 x 12.7 x 0.64	2'035 x 20 x 0.90	1'330 x 12.7 x 0.64
Tilt bow	60° to the right	45° to the right	60° to the right	45° to the right
Vise opening (mm)	129	190	205	115
Dimensions (mm)	305 x 705 x 405	350 x 800 x 450	550 x 1'100 x 600	650 x 310 x 450
Weight (kg)	23	23	35	19
Supplied with	• 1'435 x 12.7 x 0.65 mm tape Instruction manual Service keys Adjustable longitudinal stop	• 1'470 x 12.7 x 0.64 mm tape Instruction manual Service keys Adjustable longitudinal stop	• 2'035 x 20 x 0.90 mm tape Instruction manual Service keys Adjustable longitudinal stop	• 1,330 x 12.7 x 0.64 mm tape Adjustable longitudinal stop
DEE	1.26 / 1.38	1.38	2.1	1.14
EAN	7612375601534 / 7612375694185	7612375521474	7612375608298	7612375509076
RANGE	P	P	P	P

MANUAL / VERTICAL BAND SAWS

10048

- Base for 308C; 309C; 348C; 349V; 349V2

Price catalogue EX

206 £



SX-815DA

230V

- Manual band saw
- 60° straight cut by rotating the bow



Price catalogue EX

1 204 £

CUTTING CAPACITY IN MM

	
90° 150 mm	90° 150 mm
45° 105 mm	45° 105 mm
60° 65 mm	60° 70 mm
	
90° 170 x 150 mm	
45° 105 x 130 mm	
60° 65 x 80 mm	

SX-815DVP

230V

- Bandsaw with downhill brake;
- variable speed drive & lubrication
- 60° straight cut by rotating the bow



Price catalogue EX

1 671 £

CUTTING CAPACITY IN MM

	
90° 150 mm	90° 150 mm
45° 95 mm	45° 95 mm
60° 55 mm	60° 55 mm
	
90° 160 x 150 mm	
45° 95 x 130 mm	
60° 55 x 80 mm	

	SX815DA	SX815DVP
Motor (V / kW)	230 / 0.37	230 / 1.1
Bands speed (m / min-1)	65	20 to 65 per drive
Bands dimensions (mm)	1'740 x 12.7 x 0.64	1'740 x 12.7 x 0.64
Tilt bow	60° to the right	60° to the right
Vise opening (mm)	175	155
Working height (mm)	880	880
Dimensions (mm)	1'650 x 1'020 x 370	1'650 x 1'020 x 370
Weight (kg)	84	105
Supplied with	• 1,740 x 12.7 x 0.64 mm tape Instruction manual Service keys Adjustable longitudinal stop Base	• 1,740 x 12.7 x 0.64 mm tape Instruction manual Service keys Adjustable longitudinal stop Base
DEEE	5.04	6
EAN	7612375534870	7612375607697
RANGE	P	P

ASSISTED & MANUAL BANDSAWS

SX-818DV

- Downfeed band saw with dimmer & lubrication
- Cutting at 60° right by rotation of the bow

230V

Price catalogue EX

2 609 £

CUTTING CAPACITIES IN MM



90°	175 mm
45°	115 mm
60°	60 mm



90°	180 mm
45°	110 mm
60°	60 mm



90°	200 x 150 mm
45°	105 x 90 mm
60°	60 x 60 mm



SX-822DB-M

- Manual band saw ø 225 mm with lubrication
- 60° right-hand cut by rotating the bow

230V

Price catalogue EX

3 551 £

CUTTING CAPACITIES IN MM



90°	225 mm
45°	160 mm
60°	100 mm



90°	225 mm
45°	160 mm
60°	100 mm



90°	245 x 180 mm
45°	160 x 160 mm
60°	100 x 100 mm



917C: 400V | 917M: 230V

- Band saw with assisted descent & lubrication
- 60° right-hand cut by rotating the bow

400V

Price catalogue EX

3 185 £

CUTTING CAPACITIES IN MM



90°	180 mm
45°	90 mm



90°	180 mm
45°	100 mm



90°	267 x 180 mm
45°	90 x 100 mm



	SX818DV	SX822DB-M	917C: 400V 917M: 230V
Motor (V / kW)	230 / 2.0	230 / 1.1	400V / 0.75 230V / 0.75
Band speed (m / min-1)	30 to 80 dimmer	65	22; 33; 45; 60 par courroie
Tape dimensions (mm)	2'080 x 20 x 0.9	2'480 x 27 x 0.9	2'360 x 20 x 0.9
Tilting bow to	60° R	60° R	45° R
Vise opening (mm)	230	260	270
Working height (mm)	980	980	680
Dimensions (mm)	1'350 x 715 x 1'326	1'570 x 1'500 x 935	1'250 x 1'240 x 500
Weight (kg)	195	265	180
Supplied with	Tape 2'080 x 20 x 0.9 mm User's manual Service keys Adjustable length stop with scales Base	• 2,480 x 27 x 0.9 mm tape User manual Service keys Adjustable length stop with scale Base	• 2'360 x 20 x 0.9 mm tape Instruction manual Service keys Base
DEEE	11.7	15.9	11.1 / 10.8
EAN	7612375607857	7612375538878	7612375536874 / 7612375537123
RANGE	R	R	P

MANUAL & POWER BAND SAWS

SX-821DA

- SDownfeed bandsaw with 2 speeds
- 60° straight cut by rotating the bow
- New trigger

CUTTING CAPACITY IN MM

90°	225 mm	90°	220 mm
45°	150 mm	45°	140 mm
60°	90 mm	60°	90 mm
90°	240 x 160 mm		
45°	210 x 140 mm		
60°	90 x 90 mm		

400V

SX-823DG

- Manual bandsaw with assisted descent
- ø 220 mm with lubrication
- Cutting at 60° right & 45° left by rotating the bow

CUTTING CAPACITY IN MM

90°	220 mm	90°	220 mm
45°	150 mm	45°	140 mm
60°	90 mm	60°	90 mm
L 45°	110 mm	G 45°	110 mm
90°	260 x 90 mm		
45°	145 x 125 mm		
60°	85 x 85 mm		
L 45°	160 x 45 mm		

400V

SX-823DGB

- 2-speed motor
- Manual or assisted bow lowering
- Right and left-hand cuts by rotating the bow
- Tape tension gauge

CUTTING CAPACITY IN MM

90°	225 mm	90°	240 x 160 mm
45°	145 mm	45°	145 x 100 mm
60°	90 mm	60°	85 x 100 mm
L 45°	145 mm	L 45°	145 x 115 mm

400V



Price catalogue EX

3 723 £



Price catalogue EX

5 082 £



Price catalogue EX

5 112 £

	SX821DA	SX823DG	SX823DGB
Motor (V / kW)	400 / 2.0	400 / 1.1	400 / 1.1
Bands speed (m / min-1)	35 to 70	36 - 72	35 / 70
Bands dimensions (mm)	2'455 x 27 x 0.9	2'455 x 27 x 0.9	2'450 x 27 x 0.9
Tilt bow	60°	60° to the right & 45° to the left	60° to the right & 45° to the left
Vise opening (mm)	240	260	240
Working height (mm)	980	850	950
Dimensions (mm)	1'500 x 1'100 x 1'750	1'100 x 1'800 x 1'700	1'350 x 700 x 1'326
Weight (kg)	220	280	270
Supplied with	2,455 x 27 x 0.9 mm tape Instruction manual Service keys Adjustable length stop with scale Base	• 2,455 x 27 x 0.9 mm tape Instruction manual Service keys Adjustable length stop with scale Base	Saw blade Base Lubrication
DEEE	14.4	16.8	19.2
EAN	7612375503296	7612375534559	7612375504514
RANGE	R	R	R

ASSISTED & MANUAL BANDSAWS

SX-823DGV I

- Manual bandsaw with assisted descent $\varnothing$ 220 mm with lubrication
- Cutting at 60° right & 45° left by rotating the bow

CUTTING CAPACITIES IN MM

90°	220 mm	90°	220 mm
45°	150 mm	45°	140 mm
60°	90 mm	60°	90 mm
L 45°	110 mm	L	110 mm

90°	260 x 90 mm
45°	145 x 125 mm
60°	85 x 85 mm
L	160 x 45 mm

400V



Price catalogue EX

5 834 £

SX-827DGV I

- Manual band saw & assisted descent $\varnothing$ 240 mm with lubrication
- Cutting at 60° right & 45° left by rotation of the bow

CUTTING CAPACITIES IN MM

90°	270 mm	90° right	350 x 260 mm
45°	240 mm	45° right	220 x 220 mm
60°	160 mm	60° right	150 x 150 mm
L 45°	210 mm	L 45°	180 x 180 mm

90° right	260 mm
45° right	220 mm
60° right	160 mm
L 45°	160 mm

400V



Price catalogue EX

7 984 £

	SX823DGV I	SX827DGV I
Motor (V / kW)	400 / 1.1	400 / 1.5
Band speed (m / min-1)	20 to 85 per variable speed drive	20 to 85 dimmer
Tape dimensions (mm)	2'455 x 27 x 0.9	3'160 x 27 x 0.9
Tilting bow to	60° to the right & 45° to the left	60° right & 45° left
Vise opening (mm)	260	360
Working height (mm)	850	860
Dimensions (mm)	1'100 x 1'800 x 1'700	715 x 1'800 x 1'900
Weight (kg)	280	360
Supplied with	• 2,455 x 27 x 0.9 mm tape - Instruction manual - Service keys - Adjustable length stop with scale - Base	3'160 x 27 x 0.9 mm tape - Adjustable length stop with scales - Base
DEEE	16.8	21.6
EAN	7612375537147	7612375503432
RANGE	R	R

SEMI-AUTOMATIC BANDSAWS

SX-823DGSVI

- Semi-automatic band saw $\varnothing$ 220 mm with lubrication
- Cutting at 60° right & 45° left by rotation of the bow

400V

CUTTING CAPACITIES IN MM

		
90° 220 mm	90° 260 x 90 mm	90° 210 mm
45° 150 mm	45° 145 x 125 mm	45° 140 mm
60° 90 mm	60° 90 x 85 mm	60° 85 mm
L 45° 110 mm	L 45° 160 x 45 mm	L 45° 110 mm



Price catalogue EX

7 813 £

SX-827DGSVI

- Semi-automatic band saw $\varnothing$ 270 mm with lubrication
- Cutting at 60° right & 45° left by rotation of the bow

400V

CUTTING CAPACITIES IN MM

		
90° 265 mm	90° 350 x 220 mm	90° 260 mm
45° 230 mm	45° 240 x 110 mm	45° 150 mm
60° 135 mm	60° 130 x 90 mm	60° 90 mm
L 45° 210 mm	L 45° 170 x 105 mm	L 45° 160 mm



Price catalogue EX

10 031 £

SX-830DGSVP

- Dimmer 15 to 90 m / min
- Right and left hand cutting by rotation of the bow
- Tape tension gauge

400V

CUTTING CAPACITIES IN MM

		
90° 300 mm	90° 375 x 190 mm	90° 290 mm
45° 240 mm	45° 240 x 160 mm	45° 225 mm
60° 155 mm	60° 150 x 150 mm	60° 150 mm
L 45° 220 mm	L 45° 240 x 100 mm	L 45° 195 mm



Price catalogue EX

13 207 £

	SX823DGSVI	SX827DGSVI	SX-830DGSVP
Motor (V / kW)	400 / 1.1	400 / 1.5	400 / 2.2
Band speed (m / min-1)	20 to 85 dimmer	20 to 85 dimmer	15 / 90
Tape dimensions (mm)	2'455 x 27 x 0.9	3'160 x 27 x 0.9	3'160 x 27 x 0.9
Tilting bow to	60° right & 45° left	60° right & 45° left	60° right, 45° left
Vise opening (mm)	260	360	375
Working height (mm)	850	900	910
Dimensions (mm)	1'100 x 1'800 x 1'700	749 x 1'880 x 1'900	1'760 x 890 x 1'560
Weight (kg)	355	460	690
Supplied with	Tape size 2'455 x 27 x 0.9 mm Adjustable length stop with scales Base	3'160 x 27 x 0.9 mm tape Adjustable length stop with scales Base	Saw blade Base Lubrication
DEEE	21.3	27.9	41.4
EAN	7612375534641	7612375536850	7612375504767
RANGE	R	R	R

BANDS SAWS

BS-210M

- 220 Volts, 60Hz, single-phase
- Cuts metal and other materials
- 19 mm blade height
- Bow rotation up to 60°
- Variable speed
- Quick-stroke clamping jaws
- Tape tension control gauge
- Hydraulic or manual bow lowering
- Automatic stop in case of band breakage
- Direct pinion drive

CUTTING CAPACITIES IN MM

90°	177 mm	90°	210 x 175 mm	90°	177 mm
45°	120 mm			45°	110 mm
60°	69 mm			60°	60 mm

230V

Price catalogue EX

3 519€



BS-250M

220V

- Cuts metal and other materials
- 27 mm high blade / Archer rotation: up to 45°
- Variable speed
- Automatic stop in case of band breakage /
- Quick-stroke clamping jaws
- Two lowering modes:
 - 1 - manual lowering mode by pulling the handle and activating the trigger
 - 2 - hydraulic lowering mode, adjustable by the operator

90°	229 mm
45°	89 mm

90°	215 mm
45°	86 mm



Price catalogue EX

4 945€

BS-350M

230V

- Available in three-phase 400V: BS-350-3PH
- Manual band saw
- The cast-iron pendulum bow ensures extreme rigidity and pivots in two directions to ensure angled cuts from -45° to +60°.

- Two descent modes:
 - 1 - manual lowering mode by pulling the handle and activating the trigger
 - 2 - hydraulic lowering mode, adjustable by the operator
- Direct-drive gearbox helps prolong the life of the Bands, and enables faster, more precise cuts to be made

CUTTING CAPACITIES IN MM

90°	260 mm	90°	350 x 220 mm	90°	255 mm
45°	240 mm	45°	240 x 160 mm	45°	222 mm
60°	165 mm	60°	185 x 114 mm	60°	152 mm
L 45°	210 mm			L 45°	178 mm

Price catalogue EX

7 549€



	BS-210M	BS-250M	BS-350M
Motor (V/kW)	230 / 1.1	220 / 1.5	230 / 2.2
Cutting angle	90° / 45° / 60°	90° / 45°	90° / 45°R / 60° / 45°L
Variable cutting speed (m/min)	20-85	20-85	20-85
Orientation up to 60°	Manual pivot	Manual pivot	Manual pivot
Blade dimensions	20 x 1 x 2110	27 x 1 x 2'460	27 x 1 x 3160
Two cutting modes	Manual and controlled descent	Manual and controlled descent	Manual and controlled descent
Dimensions (mm)	1525 x 1120 x 1220	1'525 x 1'120 x 1'220	1750 x 760 x 1220
Weight (kg)	200	215	430
DEEE	12.12	12.96	25.2
EAN	5060473190091	5060473192002	5060473193648
RANGE	U	U	U

ASSISTED & MANUAL BANDSAWS / SEMI-AUTOMATIC BANDSAWS

MOD-280M-T

- Manual band saw
- Dual speed bandsaw
- Cutting at 45° right by rotation of the bow

400V
280M-T



Made in Italy

CUTTING CAPACITIES IN MM

90°	220 mm
45°	160 mm
60°	95 mm

90°	220 mm
45°	155 mm
60°	95 mm

90°	260 x 140 mm
45°	160 x 140 mm
60°	95 x 95 mm

Price catalogue EX

3 929 £

MOD-280M-T



MOD-280DAM / MOD-280DA

Now available in single-phase

- Manual band saw
- Dual speed band saw
- 45° right-hand cutting by rotating the bow
- Assisted descent

230V
280DAM

400V
280DA-T



Made in Italy

CUTTING CAPACITIES IN MM

90°	220 mm
45°	160 mm
60°	95 mm

90°	220 mm
45°	155 mm
60°	95 mm

90°	260 x 140 mm
45°	160 x 140 mm
60°	95 x 95 mm

Price catalogue EX

5 789 £

MOD-280DAM

Price catalogue EX

5 012 £

MOD-280DA-T



MOD-420DA 60 / MOD-370DA 60

- Drive by 2-speed motor in direct drive with cemented gearbox
- Start-up by two-hand control
- Sprinkler fluid recovery housing at rear

400V



Made in Italy

CUTTING CAPACITIES IN MM

420DA.60

90°	300 mm
45°	240 mm
30°	170 mm

90°	240 mm
45°	230 mm
30°	170 mm

90°	420 x 200 mm
45°	270 x 140 mm
30°	170 x 170 mm

370DA.60

90°	280 mm
45°	225 mm
30°	140 mm

90°	240 mm
45°	215 mm
30°	140 mm

90°	370 x 140 mm
45°	230 x 140 mm
30°	140 x 130 mm

Price catalogue EX

10 406 £

MOD-420DA 60



	MOD-280M-T	MOD-280DAM/MOD-280DA	MOD-370DA 60	MOD-420DA 60
Motor(V / kW)	400 / 0.7	230 / 0.7 - 400 / 0.7	400 / 1.5	400 / 1.5
Bands speed (m / min-1)	35 - 70	35 - 70	35 - 70	35 - 70
Bands dimensions (mm)	2'455 x 27 x 0.9	2'455 x 27 x 0.9	3120 x 27 x 0.9	3270 x 27 x 0.9
Tilt bow	60° to the right	60° to the right	60° to the right	60° to the right
Vise opening (mm)	260	260	-	-
Working height (mm)	965	965	830	830
Dimensions (mm)	1'250 x 1'230 x 1'860	1'250 x 1'230 x 1'860	14'00 x 1'550 x 1'950	1'400 x 1'600 x 1'995
Weight (kg)	280	280	350	356
Supplied with	Tape measuring 2,455 x 27 x 0.9 Adjustable longitudinal stop with scale	• Tape measuring 2,455 x 27 x 0.9 Adjustable longitudinal stop with scale Base	• Bands 3120 x 27 x 0.9 Adjustable longitudinal stop with scale Base	• Bands 3270 x 27 x 0.9 Adjustable longitudinal stop with scale Base
DEEE	14.4	15	22.8	24.6
EAN	7612375504699	7612375694406 / 7612375504682	7612375754247	7612375689709
RANGE	R	R	R	R

SEMI-AUTO BAND SAWS / BIANCO AUTO BAND SAWS

MOD-330SADSMS

• Semi-automatic saw, fitted with a hydraulic power unit, ideally suited to sawing work in locksmiths', general mechanics' and maintenance workshops. It cuts solids (max. Ø150 mm) and profiles in straight and mitre cuts from 45° left to 60° right.

400V



Made in Italy



Price catalogue EX

12 497€

CUTTING CAPACITY IN MM

					
90°	260 mm	90°	220 mm	90°	330 x 120 mm
R 45°	150 mm	R 45°	150 mm	R 45°	190 x 150 mm
L 45°	120 mm	L 45°	110 mm	L 45°	190 x 100 mm
R 60°	120 mm	R 60°	110 mm	R 60°	120 x 120 mm

MOD-370SADSMS

- Semi-automatic band saw R / L by moving the vice
- Capacity sensor
- Two-speed bandsaw
- Cuts at 60° right & 45° left by rotating the bow & moving the vice

400V



Made in Italy



Price catalogue EX

14 506€

CUTTING CAPACITY IN MM

					
90°	280 mm	90°	240 mm	90°	350 x 140 mm
R 45°	230 mm	R 45°	200 mm	R 45°	230 x 230 mm
L 45°	200 mm	L 45°	170 mm	L 45°	220 x 100 mm
R 60°	140 mm	R 60°	140 mm	R 60°	140 x 140 mm

MOD-420SADSMS

- Mitre cut by pivoting the bow 45° left and 30° right
- 2-speed electric motor (35 and 70 m/min)
- Ball-bearing guide
- Metal evacuation driven by the blade

400V



Made in Italy



Price catalogue EX

16 059€

CUTTING CAPACITY IN MM

					
90°	280 mm	90°	250 mm	90°	420 x 180 mm
R 45°	260 mm	R 45°	250 mm	R 45°	260 x 200 mm
L 45°	200 mm	L 45°	180 mm	L 45°	250 x 100 mm
R 30°	170 mm	R 30°	160 mm	R 30°	160 x 160 mm

	MOD-330SA.DS.MS	MOD-370SA.DS.MS	MOD-420SA.DS.MS
Motor (V / kW)	400 / 1.5	400 / 1.5	400 / 1.5
Bands speed (m / min-1)	35 - 70	35 - 70	35 - 70
Bands dimensions (mm)	3'010 x 27 x 0.9	3'120 x 27 x 0.9	3'270 x 27 x 0.9
Tilt bow	60° to the right & 45° to the left	60° to the right & 45° to the left	60° to the right & 45° to the left
Vise opening (mm)		360	
Working height (mm)	830	830	830
Dimensions (mm)	1'500 x 1'600 x 1'700	1'450 x 1'650 x 1'750	1'630x1'400x1'800
Weight (kg)	460	480	495
Supplied with	• Bands 3010 x 27 x 0.9 Instruction manual Adjustable longitudinal stop with scale Base	• 3120 x 27 x 0.9 Bands Instruction manual Adjustable longitudinal stop with scale Base	• Bands 3270 x 27 x 0.9 Instruction manual Adjustable longitudinal stop with scale Base
DEEE	27,6	27,6	28,2
EAN	7612375754391	7612375504712	7612375689730
RANGE	R	R	R

AUTOMATIC BAND SAWS

MOD-330AE60° / 370AE60°

- Automatic bandsaw with rapid up and down movement of the bow controlled by a sensor
- Manual adjustment of cutting length
- The machine is equipped with perimeter safety protection, a double safety button to start the cycle and a low-voltage electrical switch to comply with CE standards.
- Low-voltage power supply in compliance with CE standards



Made in Italy

400V

CUTTING CAPACITY IN MM

90°	260 mm
45°	200 mm
60°	120 mm

90°	240 mm
45°	190 mm
60°	115 mm

90°	330 x 120 mm
45°	200 x 130 mm
60°	120 x 100 mm



Price catalogue EX

17 959€

MOD-370AE60° CNC

SAW WITH BAR FEED

- Automatic CNC band saw
- 60° right-hand cut by rotating the bow, bar feed 800 mm with stroke (max. 10,000)
- Control panel with CNC programmer, possibility of producing different lengths from the same bar in the same cutting program



Made in Italy

400V

CUTTING CAPACITY IN MM

90°	280 mm
45°	225 mm
60°	140 mm

90°	240 mm
45°	215 mm
60°	140 mm

90°	330 x 240 mm
45°	230 x 140 mm
60°	140 x 140 mm



Price catalogue EX

23 828 €

MOD-420AE60° CNC

- Automatic and semi-automatic CNC bandsaw with numerical control, equipped with a hydraulic power unit perfectly suited to mass production sawing in locksmiths' and general mechanics' workshops.
- It cuts solids (max. Ø150 mm) and profiles (Ø300 mm) in straight and mitre cuts at up to 60° to the right.
- Saw with bar feed



Made in Italy

400V

CUTTING CAPACITY IN MM

90°	300 mm
45°	240 mm
30°	170 mm

90°	240 mm
45°	230 mm
30°	170 mm

90°	420 x 200 mm
45°	270 x 140 mm
30°	170 x 170 mm



Price catalogue EX

23 289€

	MOD-330AE60° / 370AE60°	MOD-370AE.60° CNC	MOD-420AE.60° CNC
Motor (V / kW)	400 / 1.5	400 / 1.5	400 / 1.5
Bands speed (m / min-1)	35 - 70	de 20 à 100 per drive	20 à 100 m/m
Bands dimensions (mm)	3010 X 27 X 0.9	3'120 x 27 x 0.9	3270 x 27 x 0.9
Tilt bow	60° to the right	60° to the right	60° to the right
Vise opening (mm)	-	330	-
Working height (mm)	835	835	835
Dimensions (mm)	2'800 x 2'050 x 1'900	2'800 x 2'050 x 1'900	3'220 x 2'050 x 1'900
Weight (kg)	1090	1090	1'090
Supplied with	Tape measuring 2,455 x 27 x 0.9 Adjustable longitudinal stop with scale	Tape 3'120 x 27 x 0.9 User manual	Bands 3270 x 27 x 0.9 User manual
DEEE	49.8 / 51	51	65,4
EAN	7612375700916 / 7612375689655	7612375631760	7612375754384
RANGE	R	R	R

BTM BAND SAWS

MOD.370ADS CNC 1R

400V

- Controls centralised on the console
- Automatic right/left bow rotation
- Vices controlled by hydraulic cylinder
- Cutting speeds adjustable by frequency converter (inverter)
- Ball bearings
- Chip brush
- Saw with bar feed

CUTTING CAPACITY IN MM

90°	280 mm
45° R	230 mm
45° L	200 mm
60°	140 mm

90°	240 mm
45° R	230 mm
45° L	170 mm
60°	140 mm

90°	310 x 240 mm
45° R	230 x 230 mm
45° L	220 x 100 mm
60°	140 x 140 mm



Made in Italy

Price catalogue EX

60 176 €

AP-6.4-SADS

34 X 1.1 MM TAPE

400V

- The semi-automatic band saw
- Cuts at angles of up to 60° to the right and left.
- It is equipped with a hydraulic power unit that controls the movement of the vices, displacement and locking of the bow. The operator can perform complete cutting cycles simply by pressing the hi-hand control.
- The design of these machines has been carefully thought out to make them easy to use and easy on the operator:
- Bow mounted on ball bearings for effortless rotation
- Bow locked by a hydraulic cylinder controlled from the console
- Capacity sensor to eliminate all bow stroke adjustments
- Measurement of cutting angle by encoder with value displayed on the on the console screen
- Clamping vice jaws sliding on an assembly consisting of a circular column a circular column and a flat base for easy movement easy movement
- Controls centralised on the console
- Bands tensioning by hydraulic cylinder with blade breakage safety device and impossible to start up in the event of insufficient tension

CUTTING CAPACITY IN MM

90°	410 mm
R 45°	410 mm
L 45°	410 mm
R 60°	320 mm
L 60°	330 mm

90°	410 mm
R 45°	410 mm
L 45°	410 mm
R 60°	300 mm
L 60°	310 mm

90°	610 x 410 mm
R 45°	460 x 250 mm
L 45°	460 x 270 mm
R 60°	320 x 180 mm
L 60°	320 x 170 mm



Made in Italy

Price catalogue EX

31 937 €

	MOD.370ADS CNC 1R	AP-6.4-SADS (formerly MOD61.41SADS)
Motor (V / kW)	400 / 1.5	2.2
Bands speed (m / min-1)	from 20 to 100 per drive	from 20 to 100 per drive
Bands dimensions (mm)	3'120 x 27 x 0.9	5200 x 34 x 1.1
Tilt bow	Automatic bow rotation by 45L and 60°R encoder	60° to the right & 60° to the left
Vise opening (mm)	380	620
Working height (mm)	835	870
Dimensions (mm)	2'800 x 2'000 x 1'800	2'800 x 2'445 x 2'560
Weight (kg)	1200	1400
Supplied with	• Tape 3'120 x 27 x 0.9 User manual Low voltage power supply for controls	5200 x 34 x 1.1 Bands User manual
DEEE	72	84
EAN	7612375689624	7612375689792
RANGE	R	R

BAND SAWS

TFS-180DV **NEW**

- Band saw with assisted or manual descent
- Variable speed drive and digital speed display (20 to 80 m/min)
- Integrated lubrication
- 60° right-hand cut by rotating the bow
- Bow release from the front
- **3-YEAR GUARANTEE**

230V

Price catalogue EX

2 879 £

0° 180 mm
45° 115 mm
60° 70 mm

0° 180 x 180 mm
45° 110 x 110 mm
60° 70 x 70 mm



TFS-225DA **NEW**

- Band saw with assisted descent / Two speeds (35 and 70 m/min)
- 60° right-hand cut by rotating the bow
- Bow release from the front
- **3-YEAR GUARANTEE**

400V

Price catalogue EX

3 723 £

0° 225 mm
45° 160 mm
60° 90 mm

0° 200 x 200 mm
45° 140 x 140 mm
60° 90 x 90 mm



TFS-225DG **NEW**

- Manual bandsaw with hydraulic cylinder assisted descent
- 2-speed motor (36-72m/min) / Pivoting bow at 60°D and 45°G/D
- Band guided by ball bearings / Quick clamping vice
- **3-YEAR GUARANTEE**

400V

0° 220 mm
R 45° 150 mm
L 45° 135 mm
60° 90 mm

0° 215 mm
R 45° 145 mm
L 45° 110 mm
60° 85 mm

0° 105 x 260 mm
R 45° 70 x 155 mm
L 45° 180 x 120 mm
60° 90 x 85 mm



Price catalogue EX

5 082 £

BAND SAW TABLE

TFT1M **NEW**

- Entry or exit table by 1m, can be fitted together to adjust the desired length
- **Delivered in a DIY KIT**
- **Linear metres can be added together**
- RANGE : A

Price catalogue EX

825 £



TFT-R

- Stubborn
- RANGE : A

Price catalogue

83 £



	TFS-180DV	TFS-225DA	TFS-225DG
Motor (V/kW)	230 / 0.5	400 / 1.5	400/1.1
Bands dimensions (mm)	2'085 x 20 x 0.9	2'450 x 27 x 0.9	2'455x27x0,9
Cutting speed (rpm)	20 - 80 per variable speed drive	35 - 70	36-72
Working height (mm)	950	950	
Dimensions (mm)	1'210 x 510 x 1'415	1'250 x 515 x 1'415	1'100 x 1'800 x 1'700
Weight (kg)	180	210	280
Supplied with	• Tape measuring 2,080 x 19 x 0.9	• 2'450 x 27 x 0.9 tape	• Sheet metal base Bi-metal tape 2455x27x0.9mm
DEEE	10.8	12	21.6
EAN	7612375701548	7612375701531	7612375744476
RANGE	R	R	R

BAND SAWS**TFS-225DGSVI****NEW****400V**

- Manual bandsaw with hydraulic cylinder assisted descent
- 2-speed motor (36–72m/min)
- 60°R and 45°L/R swivel bow
- Band guided by ball bearings
- Quick clamping vice

Price catalogue EX

7 813 £


0°	220 mm
R 45°	150 mm
L 45°	110 mm
60°	90 mm



0°	210 mm
R 45°	140 mm
L 45°	110 mm
60°	85 mm



0°	260 x 90 mm
R 45°	145 x 125 mm
L 45°	160 x 45 mm
60°	90 x 85 mm

**TFS-270DGV I****NEW****400V**

- Manual bandsaw with assisted descent by hydraulic cylinder + lubrication
- Variable speed drive (20–85m/min)
- 60°R and 45°L swivel bow
- Band guided by ball bearings
- Quick clamping vice

Price catalogue EX

7 984 £


0°	270 mm
R 45°	210 mm
L 45°	240 mm
60°	160 mm



0°	260 mm
R 45°	180 mm
L 45°	220 mm
60°	150 mm



0°	350 x 220 mm
R 45°	180 x 180 mm
L 45°	240 x 160 mm

**TFS-270DGSVI****NEW****400V**

- Semi-automatic bandsaw + lubrication
- Variable speed drive (20–85 m/min)
- 60° right and 45° left swivel bow
- Band guided by ball bearings
- Quick-clamping vice

Price catalogue EX

10 031 £


0°	265 mm
R 45°	230 mm
L 45°	210 mm
60°	135 mm




0°	260 mm
R 45°	150 mm
L 45°	160 mm
60°	90 mm



0°	350 x 220 mm
R 45°	240 x 110 mm
L 45°	170 x 105 mm
60°	130 x 90 mm



	TFS-225DGSVI	TFS-270DGV I	TFS-270DGSVI
Motor (V/kW)	400/1.1	400/1.5	400/1.5
Bands dimensions (mm)	2'455 x 27 x 0,9	3'160 x 27 x 0,9	3'160 x 27 x 0,9
Cutting speed (rpm)	20–85	20–85 per variable speed drive	20–85 per variable speed drive
Dimensions (mm)	1'100 x 1' 800 x 1'700	749 x 1'880 x 1'715	749x1'880x1'715
Weight (kg)	280		460
Supplied with	• User manual and service keys - Sheet metal base - Bi-metal strip 2455x27x0.9mm	• User manual and service keys - Sheet metal base - Bi-metal strip 3160x27x0.9	• User manual and service keys - Sheet metal base - Bimetal tape 3160 x 27 x 0.9mm
DEEE	39	21.6	21.6
EAN	7612375754469	761237574445	7612375754452
RANGE	R	R	R

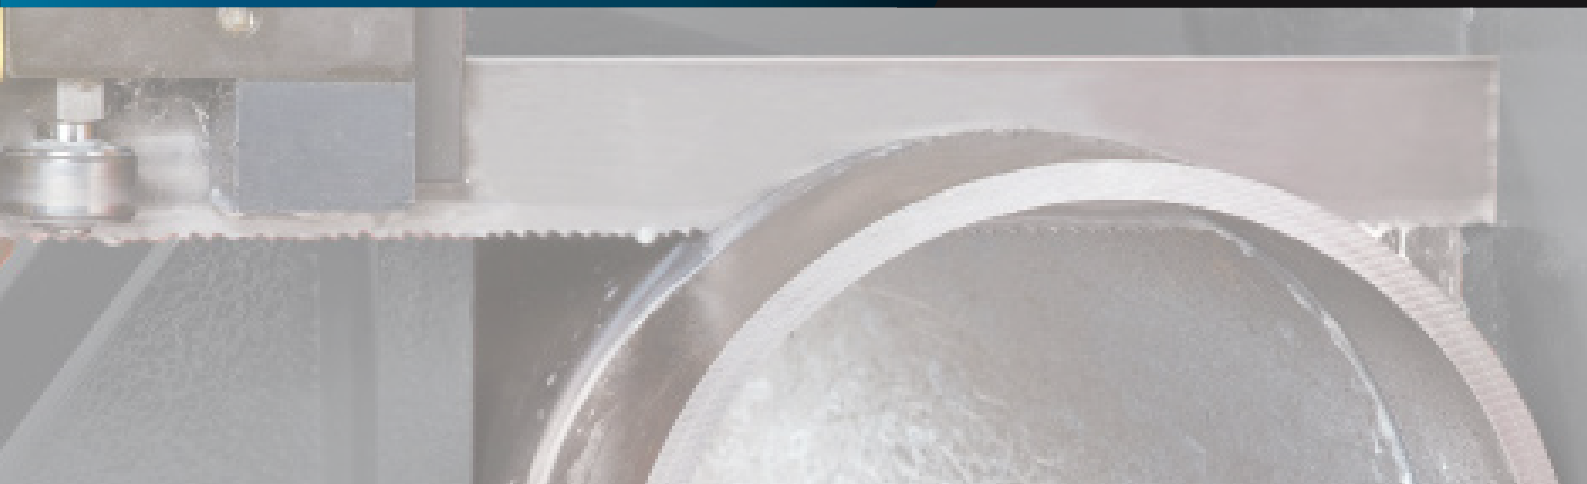

BAND SAWS	REF	DESIGNATION	EAN	PRICE/5 pces	BAND SAWS	REF	DESIGNATION	EAN	PRICE/5 pces
347	2422/5	1335 X 12,7 X 0,64 6/10	7612375699548	124 £	SX 822	2083/5	2480 X 27 X 09 3/4	7612375696998	243 £
347	2423/5	1335 X 12,7 X 0,64 8/12	7612375699562	144 £	SX 822	2082/5	2480 X 27 X 09 4/6	7612375696974	243 £
347	2424/5	1335 X 12,7 X 0,64 10/14	7612375699579	124 £	SX 822	2081/5	2480 X 27 X 09 5/8	7612375696943	243 £
347	2425/5	1335 X 12,7 X 0,64 14/18	7612375698381	124 £	SX 822	2080/5	2480 X 27 X 09 6/10	7612375696929	243 £
349V	2421/5	1440 X 12,7 X 0,64 6/10	7612375699531	134 £	SX 822	2079/5	2480 X 27 X 09 10/14	7612375696905	243 £
349V	2201/5	1440 X 12,7 X 0,64 14/18	7612375535105	134 £	SX 824	2510/5	2730 X 27 X 0,9 6/10	7612375535433	267 £
349V	2202/5	1440 X 12,7 X 0,64 10/14	7612375535099	134 £	SX 824	2511/5	2730 X 27 X 0,9 5/8	7612375535426	267 £
349V	2203/5	1440 X 12,7 X 0,64 8/12	7612375535082	134 £	SX 824	2512/5	2730 X 27 X 0,9 4/6	7612375535419	267 £
MBS 56 CS	9989/5	1640 X 13 x 0,65 8/12	7612375699357	151 £	SX 824	2513/5	2730 X 27 X 0,9 3/4	7612375535402	267 £
MBS 56 CS	9990/5	1640 X 13 x 0,65 10/14	7612375699364	151 £	MOD 330 all models	2379/5	3010 X 27 X 09 2/3	7612375697803	293 £
MBS 56 CS	9992/5	1640 X 13 x 0,65 14/18	7612375699371	151 £		2380/5	3010 X 27 X 09 3/4	7612375697803	293 £
348		1470 X 12,7 X 0,64 8/12	7612375696578	158 £		2381/5	3010 X 27 X 09 4/6	7612375697827	293 £
348	10051/5	1470 X 12,7 X 0,64 10/14	7612375535129	158 £		2382/5	3010 X 27 X 09 5/8	7612375697841	293 £
348		1470 X 12,7 X 0,64 14/18	7612375694536	158 £		2383/5	3010 X 27 X 09 6/10	7612375697865	293 £
SX 815 DV	2154/5	1740 x 12,7 x 0,65 6/10	7612375694574	161 £		2384/5	3010 X 27 X 09 8/12	7612375697889	293 £
SX 815 DV	2155/5	1740 x 12,7 x 0,65 8/12	7612375694581	161 £	MOD 370 all models	2390/5	3120 X 27 X 0,9 3/4	7612375697964	303 £
SX 815 DV	2156/5	1740 x 12,7 x 0,65 10/14	7612375694680	161 £		2391/5	3120 X 27 X 0,9 4/6	7612375697964	303 £
SX 815 DV	2157/5	1740 x 12,7 x 0,65 14/18	7612375697179	161 £		2392/5	3120 X 27 X 0,9 5/8	7612375698008	303 £
351 V	2514/5	2035 X 19 X 0,90 10/14	7612375698596	210 £		2393/5	3120 X 27 X 0,9 6/10	7612375698022	303 £
351 V	2515/5	2035 X 19 X 0,90 8/12	7612375698619	1048 £	SX 827, EHB 270, SX 830	2129/5	3160 x 27 x 0,9 3/4	7612375535471	308 £
351 V	2516/5	2035 X 19 X 0,90 6/10	7612375698633	197 £		2130/5	3160 x 27 x 0,9 4/6	7612375535488	308 £
SX 818 DV/TFS-180DV	2072/5	2080 X 19 X 0,9 10/14	7612375694642	203£		2131/5	3160 x 27 x 0,9 5/8	7612375535495	308 £
SX 818 DV/TFS-180DV	2073/5	2080 X 19 X 0,9 6/10	7612375694550	203 £		2132/5	3160 x 27 x 0,9 6/10	7612375535501	308 £
SX 818 DV/TFS-180DV	2074/5	2080 X 19 X 0,9 5/8	7612375694567	203 £		2135/5	3160 x 27 x 0,9 10/14	7612375535518	308 £
SX 818 DV/TFS-180DV	2075/5	2080 X 19 X 0,9 4/6	7612375696851	214 £	MOD 420, SX 300	2399/5	3270 X 27 X 0,9 3/4	7612375698114	318 £
917 C / 917 M	9460/5	2360 X 19 X 0,65 10/14	7612375698909	226 £		2400/5	3270 X 27 X 0,9 4/6	7612375698138	318 £
917 C / 917 M	9461/5	2360 X 19 X 0,65 6/10	7612375698930	226 £		2401/5	3270 X 27 X 0,9 5/8	7612375698152	318 £
917 C / 917 M	9462/5	2360 X 19 X 0,65 5/8	7612375694673	226 £	EHB 350	2402/5	3270 X 27 X 0,9 6/10	7612375698176	318 £
917 C / 917 M	9463/5	2360 X 19 X 0,65 4/6	7612375698978	226 £		500-1002/5	3880 x 34 x 1.1mm 6/10	7612375699777	455 £
917 C / 917 M	9464/5	2360 X 19 X 0,65 3/4	7612375698985	226 £		500-1003/5	3880 x 34 x 1.1mm 5/8	7612375699784	455 £
						500-1004/5	3880 x 34 x 1.1mm 3/4	7612375699791	455 £
						2412/5	4100 X 34 X 1,1 2/3	7612375696660	491 £
						2055/5	4100 X 34 X 1,1 3/4	7612375696660	490 £
						2054/5	4100 X 34 X 1,1 4/6	7612375696646	490 £
						2053/5	4100 X 34 X 1,1 5/8	7612375696622	490 £
					AP 6,4 SADS	2417/5	5200 x 34 x 1.1 2/3	7612375698305	621 £
						2418/5	5200 x 34 x 1.1 3/4	7612375698312	621 £
						2419/5	5200 x 34 x 1.1 4/6	7612375698329	621 £

BANDS ARE IN RANGE A

On request: tapes sold by 2 or 5 pieces

Contact us for other dimensions and sections in stock

REF	DESIGNATION	RG	EAN	PRICE EX
2146	1 ROLLER SERVANT D50 X 400 70 KG Max H 580/950	J	7612375601909	86 £
2147	5 ROLLER SERVANT D50 X 400 70 KG Max H 640/950	J	7612375601916	131 £
2148	SERVANT 1 ROLLER reversible 7 BALL D35 X 320 50 KG Max H 620/950	J	7612375601923	96 £
HRS-V	V-shaped serving trolley	A	7612375703177	161 £
2017 L	7-ROLLER FEED TABLE	A	7612375701821	556 £
2017 C	FITTING TABLE 2 ML W 320 MM H 630/1000 7 ROLLERS D 60 MAX LOAD 350 KG ML	A	7612375605755	770 £
2020	OUTPUT TABLE WITH MANUAL STOP 3 ML W 320 MM H 630/1000 12 ROLLERS D 60 MAX LOAD 350 KG ML	A	7612375605396	1 399 £
2020D3	3 ml digital-reading BUTTE sold without table	A	7612375605402	1 290 £
2020-D6	OUTPUT TABLE WITH DIGITAL STOP 6 ML W 320 MM H 630/1000 12 ROLLERS D 60 MAX LOAD 350 KG ML sold with table	A	7612375605419	3 983 £
TFT1M	TABLE ENTRY OR EXIT PER 1 M	A	7612375699951	825 £
TFT-R	STOP ASSOCIATED WITH TFT1M	A	7612375699968	83 £



2017C



2020



TFT1M



2020D3



HRS-V




2146

2147



2148



BIANCO TABLES	
RMT1/	Entry and exit table 1 ML
RMT2/	Table input and output 2 ML
RMT3/	Input and output table 3 ML
RMT4/	Input and output table 4 ML
RMT5/	Input and output table 5 ML
RMT6/	Inlet and outlet table 6 ML
RMT2R/	Output table with manual stop on scale 2 ML
RMT3R/	Output table with manual stop on scale 3 ML
RMT4R/	Output table with digital readout manual stop 4 ML
RMT5R/	Output table with digital readout manual stop 5 ML
RMT6R/	Output table with digital readout manual stop 6 ML
RMT2V/	Output table with handwheel display 2 ML
RMT3V/	Output table with handwheel display 3 ML
RMT4V/	Output table with handwheel display 4 ML
RMT5V/	Output table with handwheel display 5 ML
RMT6V/	Output table with handwheel display 6 ML
RMT2M/	Outfeed table with motorised cutting stop 2 ML
RMT3M/	Outfeed table with motorised cutting stop 3 ML
RMT4M/	Outfeed table with motorised cutting stop 4 ML
RMT5M/	Outfeed table with motorised cutting stop 5 ML
RMT6M/	Outfeed table with motorised cutting stop 6 ML

Available in 4 widths 280 / 330 / 370 / 420
Price on request

METAL LATHES

BD 3-M

- Square tool turret
- 3-jaw chuck 50 mm

230V

Price catalogue EX

581[£]



BD 7-M

- Square tool turret
- Digital speed display

230V

Price catalogue EX

1 040[£]

BD 8-M

- 4 position square tool turret
- 3-jaw chuck 100 mm

230V

Price catalogue EX

2 575[£]



PBD 2140V

- Digital speed display
- Digital display of the cross slide movement

Price catalogue EX

2 238[£]

230V



	BD 3-M	BD 7-M	BD 8-M	PBD 2140V
Motor (V / kW)	230 / 0.15	230 / 0.35	230 / 1.0	230 / 0.6
Tip height (mm)	50	90	100	105
Distance between tips (mm)	150	300	450	400
Turning ø over bed (mm)	100	180	210	210
Spindle bore (mm)	10	20	20	21
Spindle	-	MK3	MK3	MK3
Speed range (min-1)	100-3'800, dimmer	100-3'000, dimmer	100-2'000, dimmer	50-1'250 / 100-2'500, dimmer
Cross travel (mm)	50	65	100	100
Small slide travel (mm)	45	50	70	75
Metric thread range (mm)	-	0.4 - 2.0	0.25 - 3 (17 threads)	0.25 - 3.0 (14 threads)
Thread range in inches (TPI)	-	12 - 52	8 - 24 (10 threads)	8 - 44 (12 threads)
Longitudinal feed range (mm) (mm)	-	0.09	0.045 & 0.125 (2 threads)	0.11 & 0.2 (2 threads)
Spindle nose	M14 x 1	MK2	MK2	MK2
Spindle stroke sliding headstock (mm)	23	40	40	40
Max. tool size (mm)	8	8	10	10
3-jaw chuck (mm)	50	50	100	100
Dimensions (mm)	440 x 270 x 210	750 x 230 x 300	1000 x 550 x 400	900 x 460 x 500
Weight (kg)	14.5	43	94	94
Supplied with	Tool holder 3-jaw chuck 50 mm Service spanners	4 position tool holder 3-jaw chuck 100 mm Fixed point MK2 and MK3	4 position tool holder 3-jaw chuck 100 mm Fixed point MK2 and MK3 Gear set	4 position tool holder 3-jaw chuck 100 mm Fixed point MK2 and MK3 Rotating tip MK2 Slot plate 170 mm
DEEE	0.78	2.64	5.64	4.5
EAN	7612375503852	7612375503869	7612375505603	7612375520590
RANGE	P	P	I	I

METAL LATHES

PBD 2555V

- Delivered on a base and with LED lighting
- Integrated lubrication system
- Variable speed – forward / reverse spindle rotation

230V



Price catalogue EX

3 003 £

PBD 2870

- Automatic longitudinal feed – cast iron frame
- Delivered on base, with guard, chuck
- chuck, lighting and lubrication system
- Integrated lubrication system

230V



Price catalogue EX

3 604 £

PBD 3069

- Automatic longitudinal feed
- Cast iron frame
- Integrated lubrication

230V



Price catalogue EX

4 529 £

	PBD 2555V	PBD 2870	PBD 3069
Motor (V / kW)	230 / 1.1	230 / 1.1	230 / 1.1
Tip height (mm)	125	140	150
Distance between tips (mm)	550	700	750
Turning ø over bed (mm)	250	280	300
Spindle bore (mm)	26	26	38
Spindle	MK4	MK4	MK5
Speed range (min-1)	50 – 2'500, dimmer	150 – 2'000	150 – 2'000
Cross travel (mm)	110	160	170
Small slide travel (mm)	70	60	90
Metric thread range (mm)	0.2 / 4.0 (21 threads)	0.2 – 4.0 (21 threads)	0.2 / 0.4 (21 threads)
Thread range in inches (TPI)	8 – 56 (21 threads)	8 – 56 (21 threads)	8 – 56 (21 threads)
Longitudinal feed range (mm) (mm / t)	0.07 / 0.4 (6 advances)	0.07 / 0.4 (6 advances)	0.085 / 0.13 / 0.17 / 0.21 / 0.35 / 0.40 / 0.50 / 0.83
Spindle nose	MK2	MK2	MK3
Spindle stroke sliding headstock (mm)	65	85	80
Max. tool size (mm)	12	12	16
3-jaw chuck (mm)	125	125	160
Dimensions (mm)	1'200 x 590 x 480	1'390 x 700 x 1'285	1'400 x 700 x 1'400
Weight (kg)	178	282	357
Supplied with	4-position tool holder 3-jaw chuck 100 mm Fixed tip MK2 MK2 rotating center	4-position tool holder 3-jaw chuck 125 mm Fixed tip MK2 MK2 rotating center	4-position tool holder Chuck 3 reversible jaws 160 mm MK2 and MK3 rotating centers Basement
DEEE	10.68	16.92	15.6
EAN	7612375519914	7612375520606	7612375519921
RANGE	I	I	R

METAL LATHES

GHB-1330-FT

- Servo chuck protector
- Foot brake
- Center distance 760 mm
- Halogen work light
- Original DRO
- Integrated lubrication

400V



Price catalogue EX

7 214 £

GHB-1340A-FT

- Servo chuck protector
- Foot brake
- Distance between tips 1'015 mm
- Halogen work light
- Original DRO
- Integrated lubrication

400V



Price catalogue EX

7 731 £

BD-947VA

- Servo chuck protector
- Foot brake
- Distance between tips 690 mm
- Halogen work light
- Equipped with Quick Change
- Integrated lubrication

230V



Price catalogue EX

7 421 £

	GHB-1330-FT	GHB-1340A-FT	BD-947VA
Motor (V / kW)	400 / 1.5	400 / 1.5	230 / 1.5
Tip height (mm)	165	165	140
Distance between tips (mm)	760	1'015	690
Turning ø over bed (mm)	330	330	300
Spindle bore (mm)	38	38	38
Spindle	MK5	MK5	MK5
Speed range (min-1)	70 – 2'000	70 – 2'000	50 – 1'000 and 100 – 2'000
Cross travel (mm)	160	160	170
Small slide travel (mm)	68	68	75
Metric thread range (mm)	23 / 0.45-10	23 / 0.45-10	14 / 0.25 – 2.5
Thread range in inches (TPI)	3 – 1 / 4 – 80	3 – 1 / 4 – 80	9 / 12 – 80
Longitudinal feed range (mm) (mm / t)	0.037 – 0.989	0.037 – 0.989	0.03 – 0.3
Spindle nose	MK3	MK3	MK3
Spindle stroke sliding headstock (mm)	95	95	80
Max. tool size (mm)	16	16	16
3-jaw chuck (mm)	160	160	160
Dimensions (mm)	1'650 x 760 x 1'200	1'905 x 760 x 1'200	1'500 x 750 x 730
Weight (kg)	600	650	215
Supplied with	3-jaw reversible chuck 160 mm Slotted table 300 mm Fixed steady rest (6 – 67 mm) / Steady rest (6 – 70 mm) Square turret / pitch comparator 2 dry points MK3 and reduction MK5 / MK3	3-jaw reversible chuck 160 mm Slotted table 300 mm Fixed steady rest (6 – 67 mm) / Steady rest (6 – 70 mm) Square turret / pitch comparator 3 dry points MK3 and reduction MK5 / MK3	3-jaw reversible chuck 160 mm Quick Change turret 1 MK3 and 1 MK2 dry tip
DEEE	30.24	39	18.9
EAN	7612375531152	7612375531169	7612375517378
RANGE	R	R	R

METAL LATHES

GH-1440K-T

- 400 V metal lathe with 12 speed mechanical gearbox
- 3-axis viewing system
- 1'016 mm distance between centers
- Servo chuck guard, foot brake and broken bed (508 mm)
- Lighting and lubrication system

400V



Price catalogue EX

10 499 £

GH-2680ZH-T

- 400 V metal lathe with 12 speed mechanical gearbox
- 3-axis viewing system
- 2'0302680zh mm distance between centers
- Servo spindle guard, foot brake and broken bed (508 mm)
- Lighting and lubrication system

400V



Price catalogue EX

28 455 £

	GH-1440K-T	GH-2680ZH-T
Motor (V / kW)	400 / 2.2	400 / 7.5
Tip height (mm)	178	330
Distance between tips (mm)	1015	2030
Turning ø over bed (mm)	360	660
Spindle bore (mm)	38	105
Spindle	MK5	CM7
Speed range (min-1)	40 – 1'800 (12 speeds)	36 – 1'600, dimmer
Cross travel (mm)	175	310
Small slide travel (mm)	98	145
Metric thread range (mm)	0.4 – 7 (37 threads)	1 – 14
Thread range in inches (TPI)	4 – 56 (28 threads)	2– 28
Longitudinal feed range (mm) (mm / t)	0.043 – 0.653 (39 advances)	0.063 – 2.52
Spindle nose	MK3	MK5
Spindle stroke sliding headstock (mm)	120	150
Max. tool size (mm)	16	25
3-jaw chuck (mm)	160	325
Dimensions (mm)	1'930 x 765 x 1'250	3'500 x 1'100 x 1'450
Weight (kg)	959	3870
Supplied with	3-jaw reversible chuck 160 mm 2 fixed tips MK3 and reduction MK5 / MK3	
DEEE	59.7	234
EAN	7612375528060	7612375503951
RANGE	R	R

SPECIAL METAL LATHES WITH QUICK CHANGE

GH-1640ZX-T-QC

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened grey cast iron prismatic base
- All gears rotate in a permanent in an oil bath
- Equipped with Quick Change

400V

Price catalogue EX

20 929 £



GH-1860ZX-T-QC

400V

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened grey cast iron prismatic base
- All gears rotate permanently in an oil bath in an oil bath
- Equipped with Quick Change

Price catalogue EX

23 819 £



GH-1880ZX-T-QC

400V

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened grey cast iron prismatic base hardened
- All gears rotate permanently in an oil bath in an oil bath
- Equipped with Quick Change

Price catalogue EX

25 974 £



GH-2060ZH-T-QC

- Equipped with a digital panel for X, Y and Z axes
- Induction hardened prismatic grey cast iron base
- All gears run permanently in an oil bath
- Equipped with Quick Change

Price catalogue EX

24 749 £

400V



	GH-1640ZX-T-QC	GH-1860ZX-T-QC	GH-1880ZX-T-QC	GH-2060ZH-T-QC
Motor (V / kW)	400 / 5.6	400 / 5.6	400 / 5.6	400 / 7.5
Tip height (mm)	203	230	230	250
Distance between tips (mm)	1'015	1'524	2'032	1'530
Turning ø over bed (mm)	406	460	460	500
Spindle bore (mm)	80	80	80	80
Spindle	CM7	CM7	CM7	CM7
Speed range (min-1)	25 – 1'800	25 – 1'800	25 – 1'800	25 – 1'800
Cross travel (mm)	228	228	228	310
Small slide travel (mm)	130	130	130	145
Metric thread range (mm)	0.5 – 20 (24 threads)	0.5 – 20.0 (24 threads)	0.5 – 20 (24 threads)	1 – 224
Thread range in inches (TPI)	72 – 1/8 (61 threads)	72 – 1"5 / 8 (61 threads)	72 – 1/8 (61 threads)	28" – 1/8"
Longitudinal feed range (mm) (mm / t)	0.038 – 2.3 (122 advances)	0.038 – 2.3 (122 advances)	0.038 – 2.3 (122 advances)	0.063 – 6.43
Spindle nose	MK4	MK5	MK5	MK5
Spindle stroke sliding headstock (mm)	124	124	124	150
Max. tool size (mm)	25 x 25	25 x 25	25 x 25	25 x 25
3-jaw chuck (mm)	250	250	250	250
Dimensions (mm)	2'462 x 1'016 x 1'220	2'960 x 1'016 x 1'241	3'458 x 1'016 x 1'241	2'980 x 1'280 x 1'410
Weight (kg)	2120	2120	2'989	3000
Supplied with	3-axis screw / Lubrication system / Foot brake	3-axis screw / Lubrication system / Foot brake	3-axis screw / Lubrication system / Foot brake	3-axis screw / Lubrication system / Foot brake
DEEE	131.4	147	166.2	180
EAN	7612375691740	7612375691757	7612375691764	7612375691771
RANGE	R	R	R	R

METAL LATHES

PL-1236E-DRO

- This conventional BAILEIGH INDUSTRIAL lathe has the same working base as the versatile PL-1236E lathe, but the PL-1236E-DRO takes it a step further by adding an industrial grade digital display system for improved accuracy and efficiency.
- The BAILEIGH INDUSTRIAL PL-1236E-DRO is loaded with features that make it a winning lathe: 2-axis digital readout, 3- and 4-jaw chucks, fixed steady rest, fol-lower steady rest, dummy platen, movable tailstock, foot brake, coolant system and halogen work light.

230V

Price catalogue EX

contact us



PL-1340E-DRO

- The BAILEIGH INDUSTRIAL PL-1340E-DRO metal lathe operates on 220v single phase 50 Hz.
- It also has 8 spindle speeds that range from 70 to 2000 rpm.
- The BAILEIGH INDUSTRIAL PL-1340E-DRO conventional lathe has many features that others do not: 2-axis spindle, 3 and 4 jaw chucks, fixed and moving steady rest, dummy table, ball bearing movable tailstock, foot brake, coolant system, halogen work light, quick change tool holder and much more.

230V

Price catalogue EX

contact us



PL-1440E-DRO

- The PL-1440E metal lathe includes many features that others do not: digital display (2-axis view), 3- and 4-jaw chucks, fixed steady rest, fol-lower steady rest, dummy table, movable tip, foot brake, cooling system, halogen work light and much more.
- This lathe is powered by a single phase 220 volt motor which allows the lathe to be used in any workshop. Combined with the 8 spindle speeds, there are not many jobs that this entry-level PL-1440E lathe can't perform.

230V

Price catalogue EX

contact us



	PL-1236E-DRO	PL-1340E-DRO	PL-1440E-DRO
Motor (V/KW)	230 / 1.8	230 / 1.8	230 / 3
Max. machinable Ø over bed (mm)	305	330	355
Max. Ø above carriage (mm)	194	197	220
Max. Ø under the broken bed (mm)	431	477	506
Length of broken bed (mm)	152	127	1016
Distance between centers (mm)	914	1016	1016
Bench length (mm)	914	1016	180
Spindle bore (mm)	38	38	38
Nose of spindle (mm)	D1 - 102	D1 - 102	-
Morse taper of spindle	MK4	MK6	MK5
Spindle speeds (rpm)	(10) 70 - 1400	(9) 70 - 2000	(16) 46 - 1800
Travel of upper / lower slide (mm)	83 / 135	68 / 160	120 / 230
Dimensions (mm)	1700 x 790 x 1525	2007 x 838 x 1500	1905 x 762 x 1550
Weight (kg)	560	650	880
DEEE	37.8	37.8	52.2
EAN	5060473190911	5060473190548	5060473190741
RANGE	U	U	U

GRINDING

TFGB-200-T

400V

NEW

- Grinding wheel/strip
- Motor mounted on ball bearings
- Belt sanding surface 105x250
- 2 suction outlets Ø36mm
- Switch with anti restart coil
- Mushroom switch
- Adjustable tool holder

Price catalogue EX

716[£]



TFG-150-M

230V

NEW

- Grinding machine with ball-bearing motor
- Switch with restart protection coil
- Adjustable tool holder
- Mushroom switch

Price catalogue EX

244[£]



TFG-200F-M

NEW

230V

- Grinding machine with ball-bearing motor
- Switch with restart protection coil
- Adjustable tool holder
- 2 suction outlets :
- Ø36mm and Ø100mm

Price catalogue EX

389[£]



TFGB-150-M

NEW

- Grinding wheel/strip
- Motor mounted on ball bearings
- Belt sanding surface 50x250
- Ø36mm dust extraction outlet
- Switch with anti-restart coil
- Adjustable tool holder
- Mushroom switch

Price catalogue EX

230V

541[£]



IBG-8VS

- Variable speed grinder
- 3 direct speeds 900 / 1'800 / 3'600 rpm
- + 100 rpm pulses between each
- Ideal for steel, stainless steel and other non-ferrous metals

Price catalogue EX

562[£]

230V



Base 578172

Only
for IBG-8VS

Price catalogue EX

335[£]



TFSG

- Stand for Tool France reels
- 290 x 300 x 830mm
- 16kg

NEW

Price catalogue EX

261[£]



	TFBG-200-T	TFG-150-M	TFG-200F-M	TFGB-150-M	IBG-8VS
Motor (V / kW)	400 / 0.55	230 / 0.45	230 / 0.45	230 / 0.30	230 / 0.75
Wheel size 1 (mm)	200 x 25 x 20.0	150 x 25 x 20	200 x 25 x 20	150 x 25 x 20	200 X 25 X 16
Tool size 2 (mm)	band 105 x 250		Brush 200x25x16	band 50 x 250	-
Speed (min-1)	2850	2850	2850	2850	900 to 3,600 (3 direct speeds: 900 / 1,800 / 3,600 + pulses of 100 Rpm between each)
Suction outlet (ø-mm)	2 x 36		1 x 30 1 x 100	1 x 36	1 x 63.5
Dimensions (mm)	500 x 280 x 630	400 x 190 x 270	490 x 300 x 290	450 x 180 x 580	450 x 250 x 570
Weight (kg)	27	12	21.5	14	30
Supplied with	• Protective plexis Grinding wheel 200x25 Gr36 Band 100x100 User manual and	• Protective plexis Grinding wheel 150x25 Gr36/Gr60 User manual and service keys	• Protective plexis Grinding wheel 200x25 Gr36 Wire brush 200x25x16mm	• Protective plexis Grinding wheel 200x25 Gr36 Band 50x1000 User manual and ser-	G36 and G60 grain grinding wheel
DEEE	1.68	0.66	1.2	0.96	1.8
EAN	7612375754407	7612375754414	7612375754421	7612375754438	7612375504750
RANGE	P	P	P	P	I

GRINDING

322BE1-BP

- Grinding wheel/belt grinder, ball bearing motor
- Belt grinding surface 105 x 250 mm
- Switch with anti restart coil
- Adjustable tool holder
- Suction outlet ø36 mm

400V

Price catalogue EX

752£



323BF-BP

- Belt/brush grinder, motor mounted on ball bearings
- Anti-restarting spool sanding surface
- Adjustable tool holder

400V

Price catalogue EX

1 076£



324BP

- Grinding machine, motor mounted on ball bearings
- Switch with anti restart coil
- Adjustable tool holder
- Mushroom switch
- Suction outlet in ø36 mm and ø100 mm

230V

Price catalogue EX

445£



325BP

- Grinding machine, motor mounted on ball bearings
- Switch with anti restart coil
- Adjustable tool holder
- Mushroom switch
- Suction outlet in ø36 mm and ø100 mm

400V

Price catalogue EX

445£



321PF

- All metal polishing and finishing machine
- Scotch-Brite non-woven material resists clogging and regularly exposes new abrasive grains for continuous cutting performance
- Mushroom switch

400V

Price catalogue EX

554£



	322BE1-BP	323BF-BP	324BP	325BP	321PF
Motor (V / kW)	400 / 0.55	400 / 1.3	230 / 0.45	400 / 0.45	400 / 0.5
Dimension D x E x A	200 x 25 x 20	200 x 19 x 16	200 x 25 x 20	200 x 25 x 20	200 x 50 x 15.88
Disc size (mm)	175 x 20 x 12	100 x 1100	175 x 20 x 12	175 x 20 x 12	-
Belt size (mm)	100 x 1000	175 x 20 x 12	200 x 25 x 16	200 x 25 x 16	-
Rotation speed (rpm)	2850	2850	2850	2850	2850
Belt speed (m/s)	15	24	-	-	-
Dimensions (mm)	520 x 280 x 630	380 x 395 x 810	690 x 310 x 340	690 x 310 x 340	600 x 210 x 270
Weight (kg)	27	37,5	24	24	19,5
DEEE	1.68	2.16	1.2	1.2	1.8
EAN	7612375631470	7612375691931	7612375631487	7612375691924	7612375631494
RANGE	P	P	P	P	P

GRINDING WHEEL / BRUSH GRINDER

330D

- Fitted with a switch with coil
- Anti-restart and emergency stop
- Adjustable tool holder and Plexiglas protectors

400V

Price catalogue EX

1 617£



324F

- 230V
- Ball-bearing motor shafts
- Switch fitted with anti-restart coil
- Plexiglas protectors and tool holders

230V

Price catalogue EX

389£



316E

- Equipped with a switch with coil
- Anti-restart and emergency stop
- Adjustable tool holder and Plexiglas protectors

230V

Price catalogue EX

244£



324E / 325E

- Equipped with a switch with coil
- Anti-restart and emergency stop
- Adjustable tool holder and Plexiglas protectors

**230V
324E**

**400V
325E**

Price catalogue EX

389£



325F

- Ball-bearing motor shafts
- Switch equipped with anti-restart coil
- Plexiglas guards and tool holders

400V

Price catalogue EX

389£



326F

- Ball-bearing motor shafts
- Switch equipped with anti-restart coil
- Plexiglas guards and tool holders

400V

Price catalogue EX

977£



	330D	316E	324E(230V) / 325E (400V)	324F	325F	326F
Motor (V / kW)	400 / 1.5	230 / 0.30	230 / 0.45 – 400 / 0.45	230 / 0.45	400 / 0.45	400 / 0.75
Wheel size 1 (mm)	300 x 50 x 25 – G36 / G60	150 x 25 x 20 – G36	200 x 25 x 20 – G36	200 x 25 x 20	200 x 25 x 20	250 x 38 x 20 – G36
Wheel size 2 (mm)	–	150 x 25 x 20 – G60	200 x 25 x 20 – G60	200 x 19 x 16	200 x 19 x 16	250 x 20 x 25,4
Speed (min-1)	1'420	2'850	2'850	2'850	2'850	2'850
Suction outlet (ø-mm)	2 exits: 36	–	2 exits: 36	2 outputs: 36 and 100	2 outputs: 36 and 100	2 outputs: 36 and 100
Dimensions (mm)	740 x 475 x 1200	400 x 190 x 270	480 x 300 x 290	490 x 300 x 290	490 x 300 x 290	610 x 440 x 380
Weight (kg)	105	12	21	21	21	44
Supplied with	• 2 grinding wheels + Plexiglas protectors + tool holder	• 2 grinding wheels + Plexiglas protectors + tool holder	• 2 grinding wheels + protectors plexi + tool holder	• Gr 36 grinding wheel + 1 brass-plated steel brush Plexiglas protectors and tool holders User manual		
DEEE	6.12	0.66	1.2	1.2	1.2	2.64
EAN	7612375608571	7612375600346	7612375600360 / 7612375600377	7612375608908	7612375608915	7612375521634
RANGE	P	P	P	P	P	P

WHEEL & BELT GRINDING

315BE1

- Ball bearing motor shafts
- Switch equipped with anti-restart anti-starting coil
- Plexiglas guards and tool holders
- Thermal protection against overloads
- Emergency stop

230V

Price catalogue EX

541 £



322BE1

- Ball bearing motor shafts
- Switch equipped with anti-restart coil
- Plexiglas guards and tool holders
- Emergency stop

400V

Price catalogue EX

716 £



323BF

BELT & BRUSH

- Belt and brush grinder
- Sanding surface 105 x 250 mm

400V

Price catalogue EX

980 £



326BE

- Ball bearing motor shafts
- Switch with coil
- anti-starting
- Plexiglas guards and tool holders
- Emergency stop

Supplied with stand

Price catalogue EX

1 454 £

400V



	315BE1	322BE1	323BF	326BE
Motor (V / kW)	230 / 0.30	400 / 0.55	400 / 1.3	400 / 1.4
Belt size (mm)	50 x 1'000	100 x 1'000	100 x 1'100	100 x 1'150
Grinding wheel size 2 (mm)	150 x 25 x 20	200 x 25 x 20	200 x 19 x 16	250 x 38 x 25.4
Speed (min-1)	2'850	2'850	2'850	2'850
Belt speed (m / s)	15	16	24	30
Suction outlet (ø-mm)	36	2 outlets: 36	100 / 100	1 outlets: 100 / 1 outlets: 36
Dimensions (mm)	450 x 180 x 580	500 x 280 x 630	660 x 500 x 580	660 x 500 x 580
Weight (kg)	14	27	37.5	50
Supplied with	Grinding wheel 36 grain 100 grain belt	Grinding wheel 36 grain 100 grain belt	Wire brush. 200 x 19 x 16 G100 Grit Strip	Grinding wheel 36 grain 100 grain belt Base
DEEE	0.96	1.68	2.19	4.14
EAN	7612375600353	7612375600407	7612375631807	7612375600452
RANGE	P	P	P	P

BELT GRINDER

336-BG

Supplied with 7 rolls

- Sander / Notcher
- Reversing the direction of travel
- 380 x 100 mm sanding surface
- Notching system tilts from 0° to 60

400V

Price catalogue EX

2 698 £



TFP-75-605

TOOL FRANCE

NEW

- Top Danish quality
- With rubber wheel
- Dust collection system
- Tilt-adjustable sanding arm
- Belt protection
- Thermal protection
- With 80 grit belt
- 3-year guarantee

400V

Price catalogue EX

1 485 £



331C

331Y


- With rubber wheel
- With belt protection
- Thermal overload protection
- With 100 grain belt
- Optional base 9867 at £218 excluding VAT (A range)

400V
331C

230V
331Y


Price catalogue EX

661€

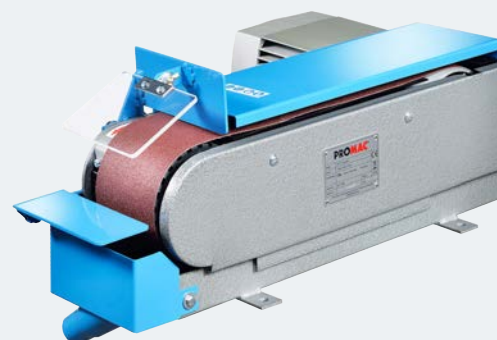

	336-BG	TFP-75-605	331C 331Y
Motor (V / kW)	400 / 2.4, 3.0	400 / 2.2	400 / 0.73
Belt size (mm)	100 x 2'000	75 x 2000	100 x 1220
Sanding surface	380 x 100	605	100 x 320
Speed (min-1)	2 speeds: 1'420 and 2'850	2800	-
Belt speed (m / s)	15 for stainless steel and 30 for steel	30 / 34	19
Suction outlet (ø-mm)	75	60	-
Dimensions (mm)	550 x 310 x 580	1035 x 550 x 1100	600 x 360 x 260
Weight (kg)	155	76	27
Supplied with	• G80 grain tape 7 rolls: 20, 26, 32, 42, 48, 60 and 76	• Strip 75 x 2000 mm, G80 Protective plexiglass Base	• Strip 100 x 1'220 mm, G100 Protective plexiglass Instructions for use
DEEE	9.3	4.56	1.59
EAN	7612375537253	7612375701272	7612375521641 / 7612375608151
RANGE	I	P	P

REF	DESIGNATION	RANGE	EAN	PRICE
9399	Spindle moulder base 290 x 300 x 830 (315BE1, 322BE1, 323BF, 326BE, 325BP, 321PF, 324BP, 323BF-BP, 322BE1-BP, 330D, 324F, 316E, 324E, 325E, 325F, 326F)	A	7612375601879	218 £
300 Z	Base with suction 450 x 450 x 805	A	7612375607840	972 £
Diameter x Width x Bore x Grain				
2098	Grinding wheel 150 x 20 x 20 x gr 46	A	7612375604139	31 £
2099	Grinding wheel 150 x 20 x 20 x gr 60	A	7612375601473	31 £
9191	Grinding wheel 150 x 25 x 20 x gr 36	A	7612375604146	46 £
9197	Grinding wheel 150 x 25 x 20 x gr 37	A	7612375604153	46 £
9340	Grinding wheel 200 x 25 x 20 g 36	A	7612375604160	68 £
9341	Grinding wheel 200 x 25 x 20 g 60	A	7612375604177	68 £
10034	Wire brush D 200 X 20 X 16	A	7612375604245	30 £
9950	Grinding wheel 250 x 38 x 25,4 G 36	A	7612375604207	133 £
10040	Wire brush D 250 X 20 X 25,4	A	761237701784	46 £
9772	Grinding wheel 300 x 50 x 25,4 G 36	A	7612375604184	155 £
9773	Grinding wheel 300 x 50 x 25,4 G 60	A	7612375604191	155 £
Abrasive belt Width x length X grit (per 5 belts)				
9306	50 X 1000 G 60	A	7612375603866	31 £
9307	50 X 1000 G 80	A	7612375603873	31 £
9308	50 X 1000 G 100	A	7612375603880	31 £
9309	50 X 1000 G 120	A	7612375603897	31 £
9310	50 X 1000 G 180	A	7612375603903	31 £
9346	100 x 1000 g 60	A	7612375603910	68 £
9347	100 x 1000 g 80	A	7612375603927	68 £
9348	100 x 1000 g 100	A	7612375603934	68 £
9349	100 x 1000 g 120	A	7612375603941	68 £
9350	100 x 1000 g 180	A	7612375603958	68 £
9945	100 X 1160 G 80	A	7612375603965	69 £
9946	100 X 1160	A	7612375603972	69 £
9947	100 X 1160	A	7612375603989	69 £
9948	100 X 1160	A	7612375603996	69 £
9949	100 X 1160	A	7612375604009	69 £
9869	100 X 1220 G 60	A	7612375604016	79 £
9870	100 X 1220 G 80	A	7612375604023	79 £
9871	100 X 1220 G 100	A	7612375604030	79 £
9872	100 X 1220 G 120	A	7612375604047	79 £
9873	100 X 1220 G 180	A	7612375604054	79 £
9829	75 x 2000 g 60	A	7612375604061	79 £
9830	75 x 2000 g 80	A	7612375604078	79 £
9831	75 x 2000 g 100	A	7612375604085	79 £
9832	75 x 2000 g 120	A	7612375604092	79 £
9833	75 x 2000 g 150	A	7612375604108	79 £
9834	75 x 2000 g 180	A	7612375606645	101 £
2213	100 x 2000 g 24	A	7612375753790	83 £
2214	100 x 2000 g 40	A	7612375753806	83 £
2215	100 x 2000 g 60	A	7612375753813	83 £
2216	100 x 2000 g 80	A	7612375753820	83 £
2231	Wheel dresser	A	7612375607888	41 £



DRILL GRINDERS

JDG-0313

- Very easy to use
- Simple and economical for sharpening HSS or HSS-E twist drills (grinding wheel for carbide drills optional)
- Allows sharpening of the drill tip and thinning of the drill core
- Capacity $\varnothing$ 3 mm to 13 mm
- No previous sharpening experience required – fast, clean and precise work
- fast, clean and precise work
- Easy to move with carrying handle

230V



Price catalogue EX

563 £

JDG-0332

- Tip angle 85° to 140° power 250 w
- Simple and economical for sharpening twist drills
- HSS or HSS-E type (grinding wheel for carbide drills optional)
- Possible operations: standard sharpening, cross sharpening core thinning and lip correction
- Capacity $\varnothing$ 2.1 mm to 32 mm
- No previous experience of sharpening required – fast, clean and precise work
- Easy to move with carrying handle

Price catalogue EX

2 077 £



230V

	JDG-0313	JDG-0332
Motor (V / kW)	230 / 0.12	230 / 0.25
Cutting angle	100 – 135°	95° ~ 135° / 85° ~ 140°
Diameter of sharpenable drills (mm)	3 to 13	2.1 to 32
Speed (min-1)	4'400	4'400
Dimensions (mm)	320 x 180 x 190	400 x 260 x 300
Weight (kg)	9	36
Supplied with	CBN grinding wheel (for HSS) (3 – 12 mm) x 1, size: 12.7 x 78 x 10 mm Collets: $\varnothing$ 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13 Collet chuck: ($\varnothing$ 3 – 14)	CBN wheel (for HSS) Collets: ER20: $\varnothing$ 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 7, 8, 9, 10, 11, 12 ER40: $\varnothing$ 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32
Option	Grinding wheel for sharpening	Grinding wheel for carbide drills
DEEE	0.58	1.86
EAN	7612375631852	7612375631036
GAMME	I	i

CHAIN HOISTS

- Mobile, manoeuvrable chain winch for a wide range of indoor and outdoor applications
- Low installation height with minimum dead weight
- Heat-treated load plates and internal components
- The WESTON double ratchet brake system provides an extra level of safety
- 360° rotation of alloy steel hooks
- Complies with ANSI/ASME and OSHA standards

JT-S90-100-30

- 1000 kg – 3m lifting

Price catalogue EX

223£

JT-S90-050-60

- 500 kg – 6m lifting

Price catalogue EX

231£

JT-S90-150-30

- 1500 kg – 3m lifting

Price catalogue EX

189£

JT-S90-300-30

- 3000 kg – 3m lifting

Price catalogue EX

298£

JT-S90-100-60

- 1000 kg – 6m lifting

Price catalogue EX

187£

JT-S90-500-30

- 5000 kg – 3m lifting

Price catalogue EX

415£



CHAIN HOISTS

997A

- Mobile, manoeuvrable chain winch for a wide range of indoor and outdoor applications
- Low installation height with minimum dead weight

Price catalogue EX

431€



	997A
Lifting capacity (kg)	2'000
Lifting height (m)	2.8
Chain length (m)	3
Link ø (mm)	8
Headroom (mm)	420
Weight (kg)	19.7
DEEE	2.08
EAN	7612375 508581
RANGE	P

ELECTRIC HOISTS

990G

Price catalogue EX

210£

991G

Price catalogue EX

349£


992G

Price catalogue EX

680£

- S3 intermittent use hoist 20% 10 min
- Remote control approx. 1.80 m long

Options: trolley and bracket
(ref : 992-100 and 9931)

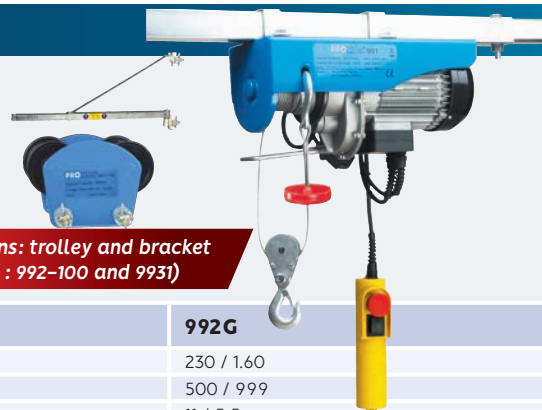

	990G	991G	992G
Motor (V / kW)	230 / 0.50	230 / 0.90	230 / 1.60
Lifting capacity (kg)	125 / 250	250 x 500	500 / 999
Lifting height (m)	12 / 6	12 / 6	11 / 5.5
Lifting speed (m / min)	8 / 4	8 / 4	8 / 4
Cable ø (mm)	3	4.2	5.6
Weight (kg)	11	17	31
DEEE	1.1	1.6	3.1
EAN	7612375601244	7612375601220	7612375600865
RANGE	P	P	P

FOLDERS

KFL 10/15

- Manual sheet metal bending machine
- Useful length 1'020 mm
- Maximum thickness 1.50 mm
- Solid plate
- 150° angle stop

Price catalogue EX

2 114 £



KFS 12/20

- Manual sheet metal bending machine
- Useful length 1'270 mm
- Maximum thickness 2.0 mm
- Segmented finger plate
- 135° angle stop

Price catalogue EX

4 081 £



KFS 20/20

- Manual sheet metal bending machine
- Working length 2'020
- Max. thickness 2.0 mm
- Segmented finger plate
- 135° angle stop

Price catalogue EX

11 556 £



	KFL 10 / 15	KFS-12 / 20	KFS 20 / 20
Max. door leaf opening (mm)	33	47	122
Dimensions (mm)	1'188 x 685 x 1'048	1'600 x 900 x 1'175	2'567 x 560 x 1'265
Weight (kg)	115	340	1020
EAN	7612375631876	7612375754292	7612375754308
RANGE			

ROLLERS

CY90-10/3M

- Manual sheet metal roller
- Working length 1'050 mm
- Max. thickness 3.0 mm
- Conical rolling device
- Manual roller adjustment

Price catalogue EX

5 916 £



CY90-10/3

- Motorised sheet metal roller
- Useful length 1'050 mm
- Max. thickness 3.0 mm
- Conical rolling device
- Control panel

Price catalogue EX

8 731 £



CY140-20 | 4.5 Motorized

- Motorised sheet metal roller
- Useful length 2'050 mm
- Maximum thickness 4.5 mm
- Conical rolling device
- Manual roller adjustment
- Control panel

Price catalogue EX

17 281 £



	CY90-10 / 3M	CY90-10 / 3	CYL -140-20 4.5 Motorized
Crush thickness (mm)	3	3	4
Roller diameter (mm)	90	90	140
Motor power (kW)	-	1.1	2.2
Rolling speed (M / mn)	-	5	5.7
Dimensions (mm)	2'100 x 850 x 1'130	2'100 x 850 x 1'130	3'240 x 900 x 1'200
Weight (kg)	490	570	1'530
DEEE	29.4	39.9	91.8
EAN	7612375754285	7612375754278	7612375754261
RANGE			

FOLDERS

BB-4814

- Adjustable stops for good repeatability
- Gap adjustment for precise bending of different thicknesses
- 1 set of 9 interchangeable treated segments: 76mm – 102mm – 635mm



Price catalogue EX

2 821 £

BB-4816E

- Adjustable counterweight
- Gap adjustment for precise bending of different thicknesses
- Machine feet
- 1 set of 16 high quality hardened steel segments: 50mm – 76mm – 102mm



Price catalogue EX

1 441 £

BB-7212

- Adjustable stops and bend angle indicator for good repeatability
- Gap adjustment for precise bending of different thicknesses
- 1 set of 17 interchangeable treated punches: 76mm – 102mm – 127mm – 150mm



Price catalogue EX

9 379 £

BB-4012F

- Foot-operated sheet metal clamp (max lift 47mm) – facilitates adjustment to different thicknesses
- Adjustable stops for good repeatability
- A range of 11 interchangeable treated segments, all in different sizes: 25 – 30 – 35 – 38 – 45 – 50 – 76 – 102 – 150 – 197 – 270 mm



Price catalogue EX

2 358 £

	BB-4814	BB-4816E	BB-7212	BB-4012F
Working length (mm)	1'220	1'220	1'830	1'016
Mild steel capacity (mm)	2	1.6	3	2.5
Stainless steel capacity (mm)	1.25	1	1.6	1.6
Crossbar adjustment (mm)	16	–	25	–
Box depth (mm)	101	62	150	63.5
Bending angle	0 – 135°	0 – 135°	0 – 135°	0 – 135°
Dimensions (mm)	1'750 x 790 x 915	1'168 x 483 x 686	2'464 x 864 x 1'118	1'475 x 635 x 1270
Weight (kg)	580	163	1'098	320
EAN	5060473192313	5060473192320	5060473193681	5060473193899
RANGE	U	U	U	U

ROLLERS

SR-1220M

- Robustly designed and easy to handle bench roller
- Excellent addition to any production shop and for sheet metal work up to 900 mm wide



Price catalogue EX

289 £

SR-5016M

- Manual sheet metal roller is an excellent choice for a robust and efficient machine tool
- Easy to set up and operate
- Useful rolling width of 1270 mm



Price catalogue EX

2 704 £

SR-2420M

- Robust and easy to handle bench roller
- Excellent addition to any production shop and for sheet metal work up to 600 mm wide
- Supplied with base



Price catalogue EX

1 191 £

SR-3622M

- Robust and easy to handle bench roller
- Excellent addition to any production shop and for sheet metal work up to 900 mm wide
- Supplied with base plate



Price catalogue EX

1 244 £

	SR-1220M	SR-5016M	SR-2420M	SR-3622M
Working length (mm)	300	1270	600	900
Mild steel capacity (mm)	1	1.6	1	0.8
Ø top roller (mm)	31.25	76	50	50
Min. rolling Ø (mm)	47	103	75	75
Grooves for bending wire	6.25-3.5-3-2-1.25 (5)	13-11-9 (3)	10-8-6.25 (3)	11.2-9.5-7.1
Transmission ratio	1:1	-	1:1	1:1
Power	Manual	Manual	Manual	Manual
Dimensions (mm)	55 x 25 x 28	170 x 66 x 80	112 x 38 x 53	140 x 375 x 525
Weight (kg)	15	250	100	130
DEEE	0.843	-	-	-
EAN	5060473194310	5060473194323	5060473194313	5060473194314
RANGE	U	U	U	U

ROLL BENDERS

PB 40-3

- 3-roller bending machine
- 3 drive rollers
- Manual adjustment of the pressure roller
- Control pedal

400V

Price catalogue EX

5 264€

Supplied with a set of standard rollers

PB 50-3

- 3-roller bending machine
- 3 drive rollers
- Manual adjustment of the pressure roller
- Foot pedal control
- Digital display of the depth of cut

400V

Price catalogue EX

6 711€

Tube rollers are optional

PB 50-3H

- 3-roller bending machine
- 3 drive rollers
- Hydraulic adjustment of the pressure roller by manual pump
- Foot pedal control
- Digital display of the depth of cut

400V

Price catalogue EX

10 075€

ETM-60

ROLL BENDING MACHINE

- Roll-up bender
- Number of programs 40 x 5 benders
- Max. capacity 60 x 4 mm or 2" x 4 mm
- Digital control panel & external foot switch
- Machine delivered on base without form or counter form

400V

Price catalogue EX

Consult us

Delivered bare / optional form and counter form

	PB 40-3	PB 50-3	PB 50-3H		ETM-60
Motor power (V / kW)	400 / 1.5	400 / 1.5	400 / 1.5	Motor power (V / kW)	400 / 2
Scaling rollers	3	3	3	Maximum bending angle	180°
Shaft diameter (mm)	40	50	50	Programmable	yes
Digital display for depth of cut	no	yes	yes	Digital display	yes
Speed (T / PMn)	14	8.5	8.5	Speed (T / PMn)	3
Tilting head	yes	yes	yes	Minimum bending radius	3 x diameter
Max. capacity (mm)	60 x 1.5 / 1 1/2" Gaz; square 40 x 40 x 3	70 x 1.5 / 2" Gaz; square 50 x 50 x 3	70 x 1.5 / 2" Gaz; square 50 x 50 x 3	Max capacity (mm)	60 x 4 or 2" x 4
Dimensions (mm)	800 x 870 x 1'350	1'100 x 800 x 1'400	1'100 x 800 x 1'600	Dimensions (mm)	600 x 500 x 980
Weight (kg)	340	355	430	Weight (kg)	190
Supplied with	User manual	User manual	User manual	Supplied with	User manual
DEEE	20.4	21.3	25.8	DEEE	11.4
EAN	7612375631937	7612375631944	7612375631951	EAN	7612375631968
RANGE	C	C	C	RANGE	C

HYDRO-PNEUMATIC PRESSES

HSP-20A

- Pressure regulator
- Set of V blocks
- Usable width 483 mm
- Maximum working capacity 20 tonnes
- Fully welded, punched main structure



Price catalogue EX

987 £

HSP-30A

- The HSP-30A has a punched, fully welded main frame allowing the operator to exploit the full force of 30 tonnes
- Set of V-blocks
- Cylinder can be moved from left to right



Price catalogue EX

1 274 £

HSP-50A

- The fully welded frame of this BAILEIGH Industrial workshop press ensures perfect rigidity and maximum use of the press.
- The 152.4 mm diameter ram has a 200 mm stroke
- 50 tonnes max



Price catalogue EX

2 623 £

HSP-75

- The fully welded frame of this BAILEIGH Industrial workshop press ensures perfect rigidity and maximum use of the press.
- The 230 mm diameter ram has 250 mm stroke
- 75 tonnes max



Price catalogue EX

3 661 £

	HSP-20A	HSP-30A	HSP-50A	HSP-75
Piston ø (mm)	51	60	-	76.2
Mobile cylinder	Yes	Yes	Yes	Yes
Working width (mm)	490	570	1'030	800
Maximum capacity (tonnes)	20	30	50	75
Cylinder stroke (mm)	190.5	150	200	250
Cylinder ø (mm)	76.2	130	152	230
Dimensions (mm)	1'727 x 1'118 x 610	1'930 x 1'120 x 610	2'110 x 1'120 x 610	2'108 x 1'118 x 610
Weight (kg)	150	205	365	590
DEEE			21.9	28.2
EAN	5060473191120	5060473191122	5060473192737	5060473192744
RANGE	U	U	U	U

HYDRO-PNEUMATIC PRESSES

HSP-75A

- This machine has a fully welded frame which makes it extremely rigid and allows the operator to use the 75 tonnes available without risk of damage.
- The BAILEIGH HSP-75A also has a unique feature that allows the operator to raise and lower the worktable using a winch and pulley system.



Price catalogue EX

3 661 £

HSP-100A

- This workshop press is equipped with high-quality pneumatic components for a powerful, accurate press
- A 165 mm diameter mobile pneumatic cylinder, which is a big advantage when working on off-centre parts
- This has a stroke of 300 mm, controlled by a remote pedal, leaving your hands free to present the workpiece
- 100 tonnes max



Price catalogue EX

5 753 £

160 TON MH M C2

- This 160-tonne hydraulic press has a very large working width (1,500 mm) for handling larger materials.
- Equipped with a movable cylinder (L & R), height-adjustable work table, pressure control, 2 speeds, joystick and hand pump for precision pressing
- 160 tonnes max



Price catalogue EX

14 498 £

	HSP-75A	HSP-100A	160 TON MH M C2
Piston head Ø (mm)	76.5	90	160
Movable cylinder (mm)	Yes	Yes	Yes
Working width (mm)	800	788	1'500
Maximum capacity (tonnes)	75	100	160
Cylinder stroke (mm)	250	300	400
Cylinder Ø (mm)	230	165	280
Energy required	air / manual	air / manual	air / manual electricity 400V
Dimensions (mm)	2'108 x 1'118 x 610	2'185 x 1'143 x 610	2'270 x 2'125 x 935
Weight (kg)	590	775	1'430
DEEE	28.2		7612375754377
EAN	5060473192744	5060473192709	I
GAMME	R	R	

BENCH PRESSES

AP-3R

Manual presse

- Press with a ratchet lever that allows you to optimize and facilitate the pressing of your workpiece
- Has a 4-position bottom plate, perfectly perpendicular to the ram and opening to fit most spindles
- It can be mounted on a base or on a bench



Price catalogue EX

340 £

AP-5

- Robust cast iron frame
- Perfect for machine shops to press bearings for example
- Supplied with a robust 4 position bottom plate suitable for different spindle sizes
- Can be mounted on a base or bench



Price catalogue EX

704 £

Manual presse

	AP-3R	AP-5
Pressure force	3 t	5.6 t
Gooseneck (mm)	127	226
Max. working height (mm)	279	400
Ø Drilling per pressure (mm)	38	50
Dimensions (mm)	457 x 229 x 635	762 x 381 x 953
Weight (kg)	60	166
DEEE	3.6	9.96
EAN	5060473193873	5060473193874
RANGE	U	U

MANUAL SHEARS

MPS-1

- This shear can cut a wide range of shapes
- Small but robust machine that can easily cut 14 gauge mild steel or large panels



Price catalogue EX

337 £

MPS-12

- Versatile, bench-mounted manual sheet metal shears that are perfect for small fabrication shops with limited space
- Lever system connected to the folding handle for greater efficiency



Price catalogue EX

337 £

	MPS-1		MPS-12
Shear capacity (mm)	2	Round shear capacity (mm)	12.7
Shear length (mm)	63.5	Cutting of solid square bar (mm)	4.7
Blade length (mm)	108	Flat bar cut (mm)	70 x 6
Power	Manual	Blade length (mm)	263
Dimensions (mm)	610 x 254 x 343	Power	Manual
Weight (kg)	9	Dimensions (mm)	737 x 165 x 445
DEEE	0.48	DEEE	1.74
EAN	5060473191047	Weight (kg)	29
RANGE	R	EAN	5060473191048
		RANGE	R

BENCH PRESS

MSS-16F

- The BAILEIGH MSS-16F foot-operated sheet metal angle former has a 150mm deep gooseneck and has a sheet metal forming capacity of 1.6mm mild steel. This machine comes as standard with a very sturdy foot, which is appreciated when working with thicker sheets. It includes quick-change jaws for swaging and stretching sheet metal.



Price catalogue EX

1 441€



	MSS-16F
Mild steel capacity (mm)	1.6
Gooseneck (mm)	152
Aluminium capacity (mm)	2
Dimensions (mm)	1156 x 508 x 203
Weight (kg)	42
DEEE	2.4
EAN	5060473191136
RANGE	U

CINTREUSES

CI-522

- Supplied in a plastic case
- Lightweight, compact, complete and easy to use
- Use for bending bare or coated copper tubes and for Melpa, Geberit or similar tubes

Price catalogue EX

617 €



CI-525

- Supplied in wooden case
- Lightweight, compact, complete and easy to use
- Used for bending bare or coated copper tubes and for Melpa, Geberit or similar tubes
- Machine delivered bare

Price catalogue EX

1 097€



	CI-522
Max. capacity (mm)	Ø 22 x 1,5 thick
Bare or coated copper tube (mm)	Ø 10 to 18
Bare copper tube (mm)	Ø 20 to 22
Mepla and Geberit pipe (mm)	Ø 16, 20 et 26
Minimum bending radius	2.5 times the tube diameter
Maximum bending angle	90°
Dimensions (mm)	320 x 170 x 250mm
Weight (kg)	1.8
Supplied with	- Oleodynamic pump body / Fork 9 aluminium shapes: 10,12,14,15,16,18,20,22 and 26mm - Plastic case
EAN	7612375754360
RANGE	C

	CI-525
CI-525 200 Bending module max. capacity (mm)	□ 23 ○ 25 □ 50x10
CI-525 300 Volute module max capacity (mm)	□ 12 ○ 12 □ 30x12
Weight (kg)	33
EAN	7612375754353
RANGE	C

WET / DRY VACUUMS


VAC-12-H

WET / DRY VACUUM

- Particularly robust and durable construction
- For professional applications in hotels and offices
- Impact-resistant housing made of 70% recyclable plastic
- Equipped with a 2.5 m suction hose
- 12 m power cable
- High suction power
- Low noise emission, only 62 dB (A)



APPLICATIONS



Price catalogue EX

183£

230V

DELIVERED




VAC-27TB-R

WET / DRY VACUUM

- Safety hose 2.5 m
- With automatic start socket
- for tools (max. power: hoover + power tools = 2'300 Watt)
- Servo-controlled socket



APPLICATIONS



Price catalogue EX

313£

230V

DELIVERED




VAC-32TB

WET / DRY VACUUM

- Filter made of fabric treated with nano-technology, eliminates micro-organisms: bacteria, viruses etc.
- Stainless steel tank
- Safety hose 2.5 m



APPLICATIONS



Price catalogue EX

338£

230V

DELIVERED



	VAC-12-H	VAC-27TB-R	VAC-32TB
Motor (V / kW)	230 / 0.87	230 / 1.5	230 / 1.5
Tank (materials)	Material / Plastic / PVC	Inox	Inox
Tank capacity (L)	12	27	32
Water column vacuum (mm)	2'420	2'230	2'230
Suction capacity (m3 / h)	183	255	255
Max. under pressure (Mbar)	242	218.68	218.68
Sound pressure level (dB)	62	72	69
Filter system	Cartridge / Paper	Cartridge / Polyester	Fabric / Polyester
Filter classification	M	M	L
Auto start socket	no	yes	no
Accessories (ø-mm)	36	36	38
Dimensions (mm)	400 x 400 x 330	306 x 360 x 610	360 x 360 x 720
Weight (kg)	6	8	9.6
DEEE	0.7	0.7	0.7
EAN	7612375527926	7612375517118	7612375517125
RANGE	P	P	P

WET / DRY VACUUMS

VAC-50-2TB

WET / DRY VACUUM

- Nanotechnology treated fabric filter nanotechnology, eliminates microorganisms: bacteria, viruses etc.
- Safety hose 2.5 m

APPLICATIONS



Price catalogue EX

617 £

230V

DELIVERED



VAC-62-2TB

WET / DRY VACUUM

- Equipped with an antistatic and oil-resistant hose
- Easy draining of remaining water through a hose
- 2 motors

Equipped with FLOWMIX

The Flowmix system is a unique and patented technology that allows the machine to increase the water suction performance by 60% (up to 3,800 mmH₂O), unlike any other Hoover on the market. With lower energy consumption.

APPLICATIONS



Price catalogue EX

862 £

230V

DELIVERED



VAC-3 / 50 OPT W&D


WET / DRY VACUUM

- Stainless steel tank – 3 independent motors and modular
- Trolley for easy movement
- HEPA H14 cartridge filter
- (High filtration)

Supplied with PMDT 01227

This KIT is hydrocarbon resistant.

APPLICATIONS



Price catalogue EX

230V

1 841 £

DELIVERED



	VAC-50-2TB	VAC-62-2TB	VAC-3 / 50 OPT W&D
Motor (V / kW)	230 / 2.2	230 / 2.6	220 – 240 / 3.3
Tank (materials)	Inox	Inox	Inox
Tank capacity (L)	50	62	50
Water column vacuum (mm)	2'230	2'680	2'300
Suction capacity (m ³ / h)	400	400	600
Max. under pressure (Mbar)	218.68	233.39	–
Sound pressure level (dB)	72	82	76
Filter system	Fabric / Polyester	Cartidge / Polyester	HEPA 14 cartridge / Filter • STAR-SHAPED / PCB pre-filter / Fleece bag class M
Filter classification	L	M	–
Auto start socket	no	no	no
Accessories (ø-mm)	38	38	60
Dimensions (mm)	500 x 500 x 870	580 x 740 x 930	580 x 700 x 1150
Weight (kg)	17.5	26	68
DEEE	1.225	4.34	1.06
EAN	7612375517156	7612375517187	7612375632057
RANGE	P	P	P

WET/DRY HOOVERS

VAC-33TB-R

WET/DRY HOOVER

- 2.5 m safety hose With automatic start socket for tools (max power: hoover + power tools = 2,300 Watt)
- Slave socket

DELIVERY




230V

Price catalogue EX

429 £

APPLICATIONS



VAC-33TB-R			
Motor (V / kW)	230 / 1.5	Filter classification	L
Tank (materials)	Stainless steel	Car start socket	Yes
Tank capacity (L)	32	Accessories (ø-mm)	38
Water column depression (mm)	2'230	Dimensions (mm)	360 x 360 x 720
Suction capacity (m3 / h)	255	Weight (kg)	9.6
		DEEE	0.56
Max. sub-pressure (Mbar)	218.68	EAN	7612375517132
Sound pressure level (dB)	69	RANGE	P
Filter system	Fabric / Polyes-		

DUST HOOVER


TFV-6FOX

NEW

- Portable and practical, this small hoover has no constraints and maximum comfort thanks to its compact design
- Ideal for vacuuming small debris, dust (even the finest) and cold ashes
- Vacuum everywhere, even in the tightest corners

3-YEAR GUARANTEE

APPLICATIONS



TOOL FRANCE

230V

	TFV-6FOX
Motor(V / kW)	230 / 1.2
Tank (materials)	Synthetic / PVC
Tank capacity (L)	6
Water column depression (mm)	1940
Suction capacity (m3 / h)	107.4
Max. subpressure (Mbar)	190.24
Sound pressure level (dB)	75
Filter system	Cartridge / Paper
Filter classification	L
Car start socket	no
Accessories (ø-mm)	32
Dimensions (mm)	210 x 270 x 400
Weight (kg)	4.5
DEEE	0.18
EAN	7612375699388
RANGE	P



Price catalogue EX

107 £



2024



PREMIUMS

WWW.TOOLFRANCE.COM

PROMAC®

Valid from 01/01/2024
to 31/08/2024

PRICE EX. **Excluding transport
costs and container surcharge**

YOUR DEALER

